
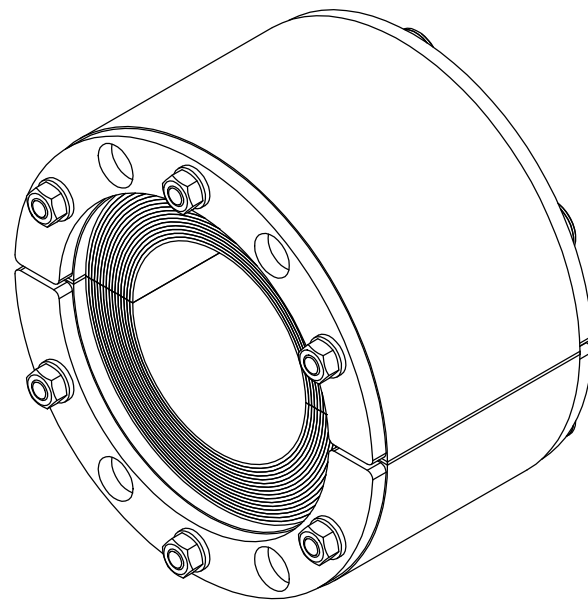
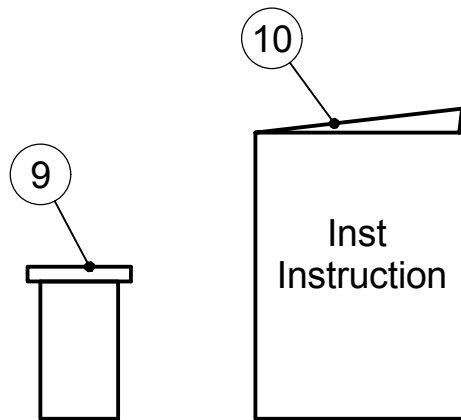
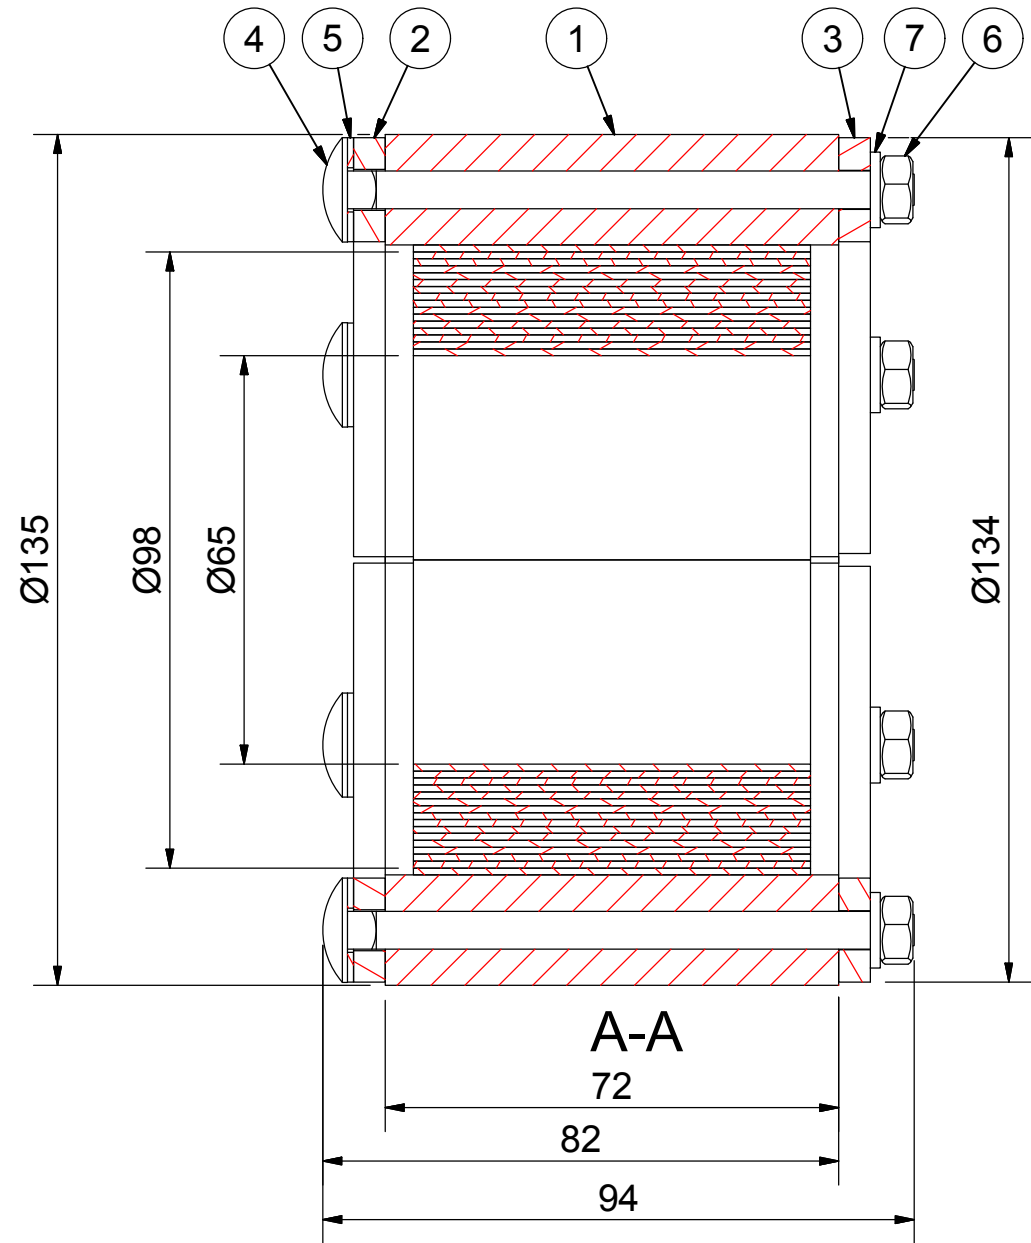


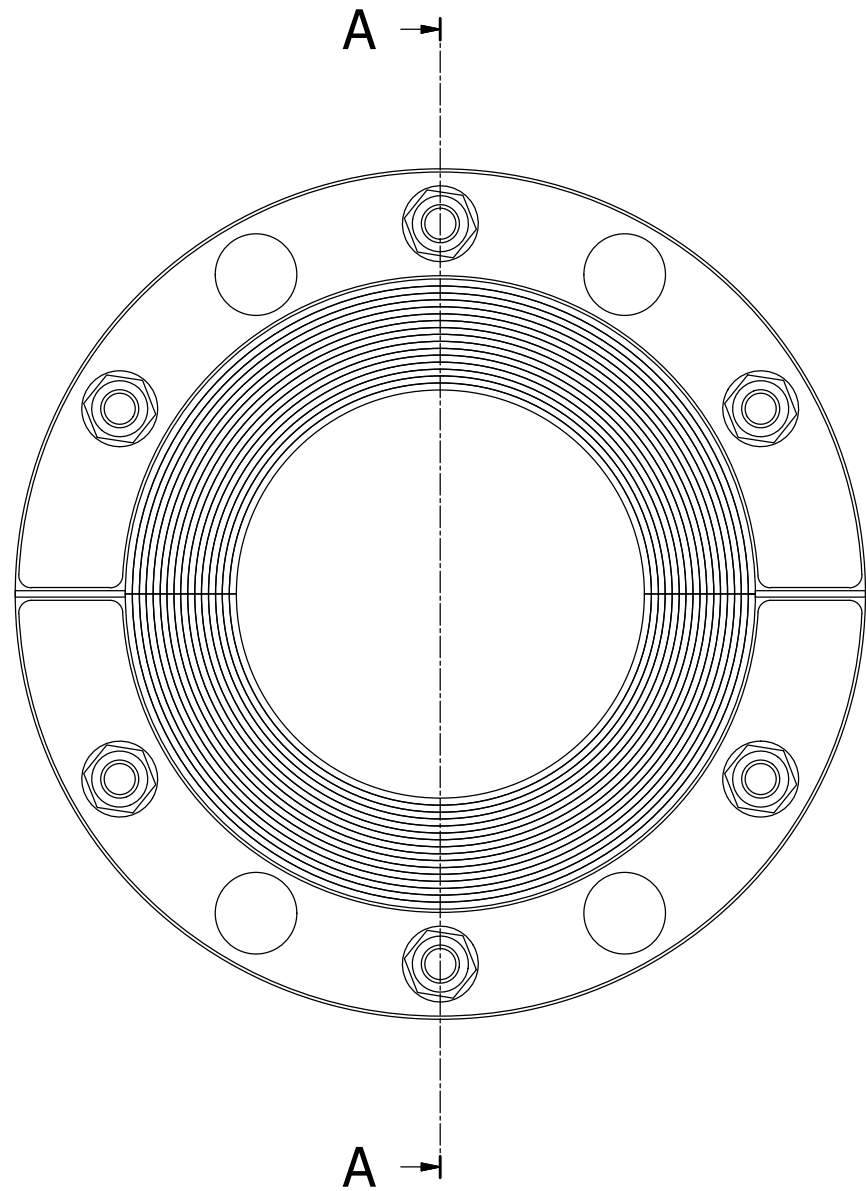

10	1	INSTALLATION INSTRUCTION											
9	1	LUBRICANT		10 ml									
7	6	WASHER		ISO 7089 M6 A4									
6	6	NUT		ISO 4032 M6 A4									
5	6	GASKET MVBF		M6, EPDM T=1									
4	6	SCREW		MVBF M6x90 DIN 603 A4									
3	2	FRONT FITTING		AISI 316, T=5 mm									
2	2	REAR FITTING		AISI 316, T=5 mm									
1	2	RUBBER FRAME		ROXYLON HE									
ITEM	QTY	Designation			Specification				Weight				
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B		General surface roughness: Ra 12.5		Designed by/date se-ronpet 2016-04-18		Latest save date 2016-04-18		Format A3	Scale	Sheet no 1 / 1	TotWeight 1,4 kg
 www.roxtec.com					Title RS UG SEALING RS 135 UG INSERTABLE WOC								Projection method 
					Restricted due to Information drawing					Drawing number S1511761			Rev A

A		2016-04-18	se-ronpet
Rev	Type of revision	Date	Sign