

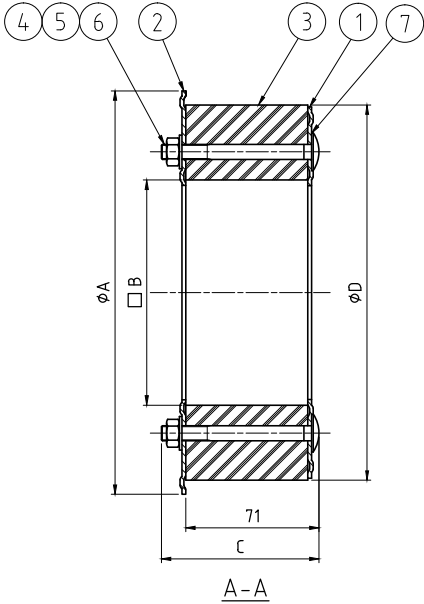
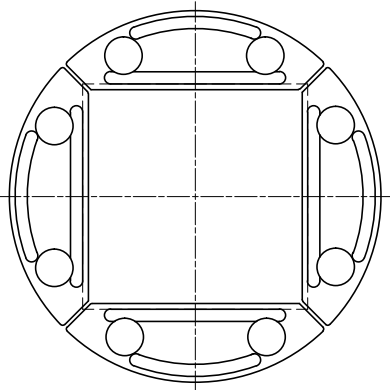


TYPE	A (MM)	B (MM)	C (MM)	D (MM)	E (MM)	F (MM)
R 125	142	80	80	125	148	10
R 127	142	80	80	127	148	10
R 150	165	90	84	150	171	13
R 200	215	120	84	200	223	13



NOTE:
GALVANIZED FITTINGS ARE POWDER
COATED BLACK

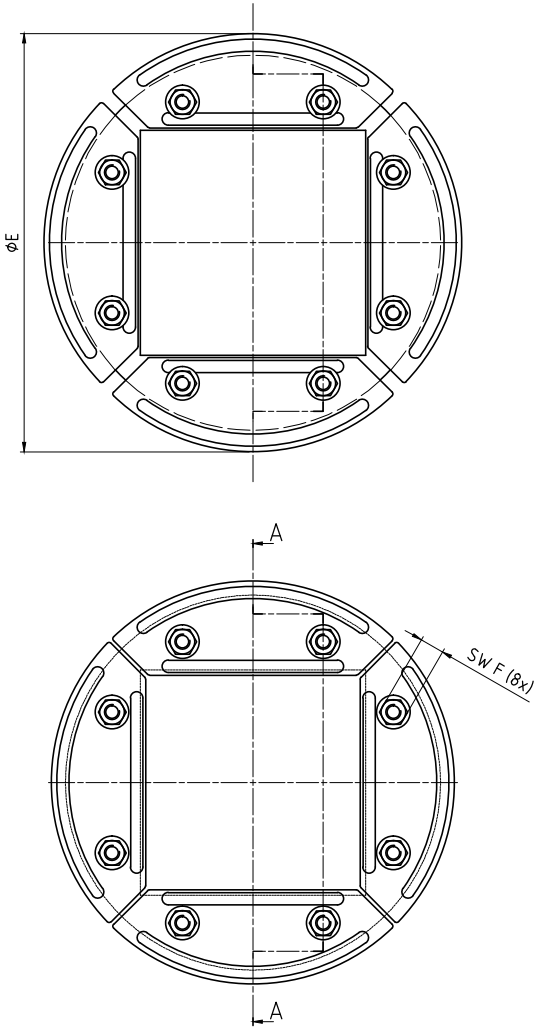

9	1	INSTALLATION INSTRUCTION		-
8	1	LUBRICANT	TALLOW 10ML	-
7	8	GASKET MVBF BOLTS	EPDM	-
6	8	WASHER	DACROLIT/A4	-
5	8	NUT	DACROLIT/A4	-
4	8	OVAL HEAD SCREW	DACROLIT/A4	-
3	1	RUBBER FRAME	ROXYLON	-
2	4	FRONT FITTING	GALV / ACID PROOF ST. STEEL	-
1	4	REAR FITTING	GALV / ACID PROOF ST. STEEL	-
Item	Qty	Designation	Specification	Net Weight
General tolerances ISO 1106-1/2-2001 EN ISO 19001-80				
Material details EN ISO 1817-8 EN ISO 19001-80				
General surface ISO 1042-8				
Designed by		Created Date		For weight
fc service		2003-10-30		-
Title		R 125-200		For weight
Restricted due to		Information drawing		-
Drawing number		S1005506		Rev
				E

E	PARTSLIST UPDATED	2017-05-30	se-jenboh
Rev	Type of revision	Date	Sign