
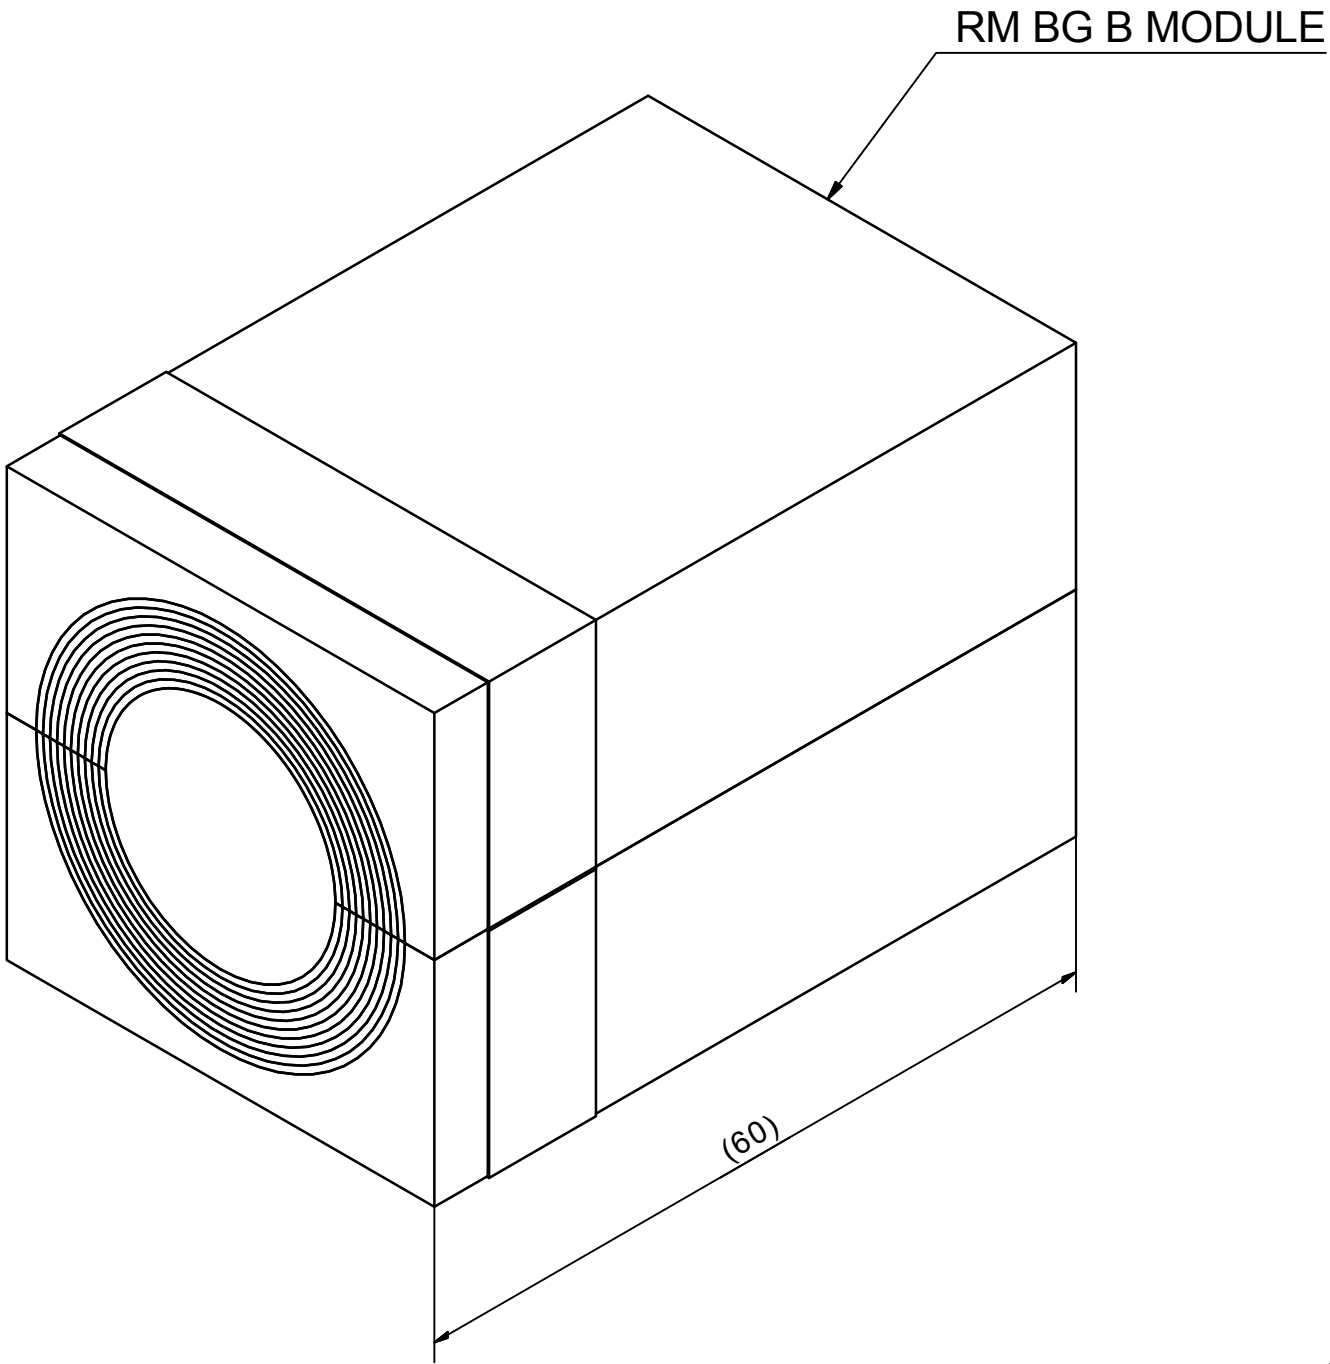


所有权利保留。未经授权复制或
 使用以及向第三方泄露。
 All rights reserved. Unauthorized reproduction, use
 or disclosure to third parties is strictly forbidden.


BG B MODULES			
TYPE	W (MM)	H (MM)	CABLE Ø (MM)
RM 20 BG B	20	20	0+4-14.5
RM 20W40 BG B	40	20	0+3.5-16.5
RM 30 BG B	30	30	0+10-25
RM 30H90 BG B	30	90	0+10-25
RM 40 BG B	40	40	0+21.5-34.5
RM 40H80 BG B	40	80	0+21.5-34.5
RM 40 10-32 BG B	40	40	0+9.5-32.5
RM 60 BG B	60	60	0+28-54
RM 60 24-54 BG B	60	60	0+24-54
RM 80 BG B WOC	80	80	48-71
RM 90 BG B WOC	90	90	48-71
RM 120 BG B WOC	120	120	67.5-99

NOTE: WOC VERSION IS WITHOUT CORE

BG B SOLID MODULES		
TYPE	W (MM)	H (MM)
RM 20/0 BG B	20	20
RM 30/0 BG B	30	30
RM 30H90/0 BG B	30	90
RM 40/0 BG B	40	40
RM 40H80/0 BG B	40	80
RM 60/0 BG B	60	60
RM 10w120/0 BG B	120	10

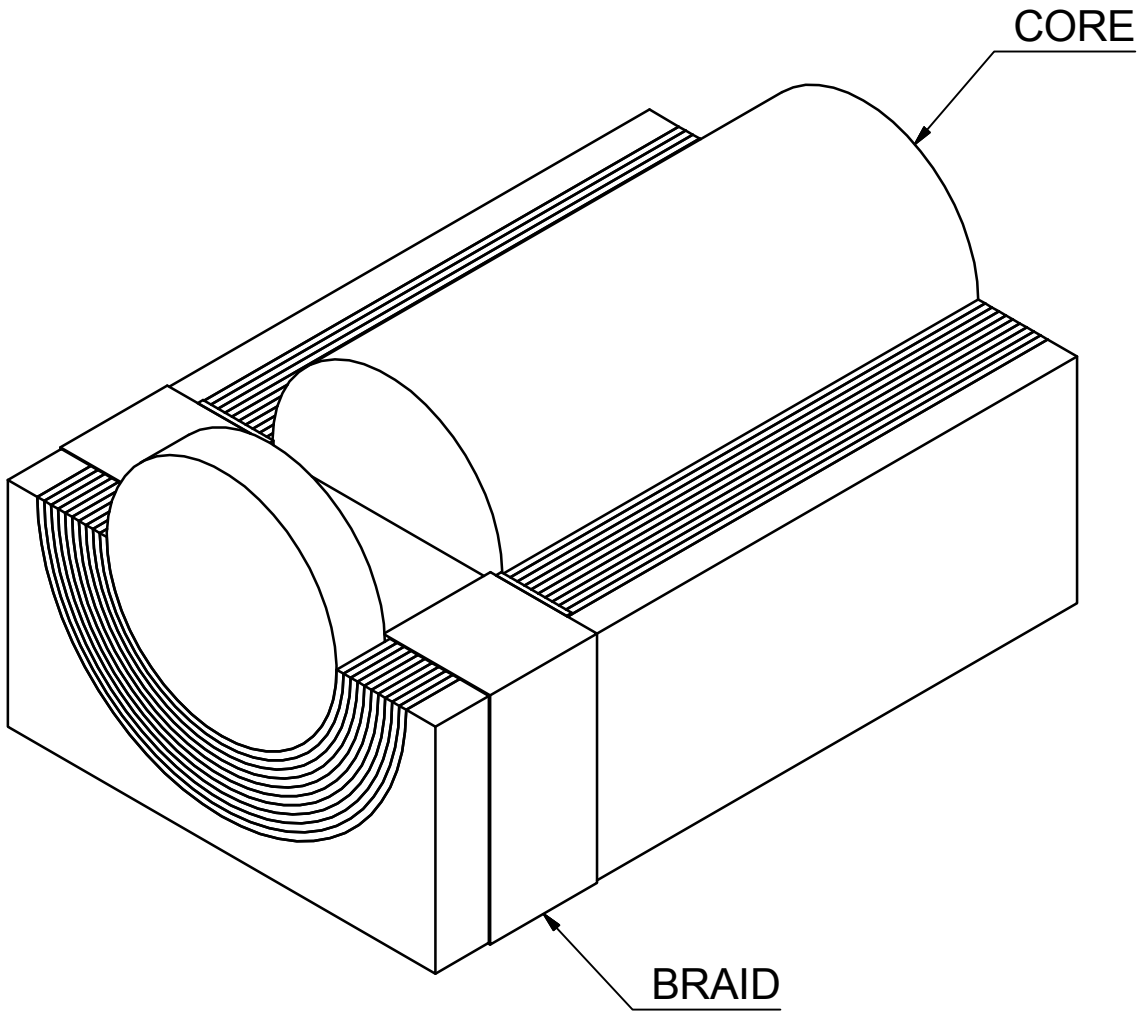

RM BG B SOLID MODULE

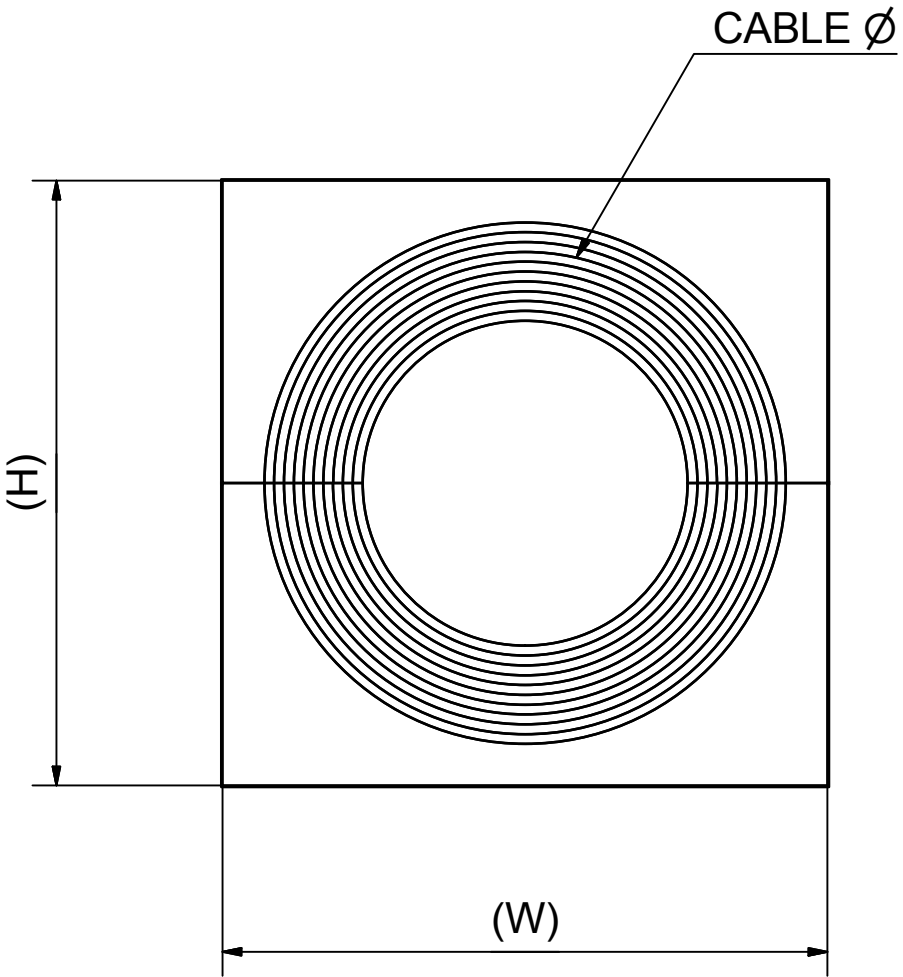

General tolerance: ISO 2768-1/2-m/K		Welded details: EN ISO 5817-B	General surface roughness: Ra 12.5	Designed by/date se-tontor 2012-01-19	Latest save date 2016-05-20	Format A2	Scale	Sheet no 1 / 1	TotWeight N/A
 Roxtec www.roxtec.com									Title RM BG B MODULES OVERVIEW Projection method 
Restricted due to Information drawing						Drawing number S1026211		Rev C	

C	30H90 AND 40H80 ADDED	2016-12-09	se-henols
Rev	Type of revision	Date	Sign