



TYPE	W (MM)	H (MM)	Ø CABLE (mm)	MODULE TYPE
RM 15 PE	15	15	0+3-11	1
RM 15w40 PE	40	15	0+3.5-10.5	3
RM 20 PE	20	20	0+4-14.5	1
RM 20w40 PE	40	20	0+3.5-16.5	2
RM 30 PE	30	30	0+10-25	1
RM 30H90 PE	30	90	0+10-25	1
RM 40 PE	40	40	0+21.5-34.5	1
RM 40H80 PE	40	80	0+21.5-34.5	1
RM 40 10-32 PE	40	40	0+9.5-32.5	1
RM 60 PE	60	60	0+28-54	1
RM 60 24-54 PE	60	60	0+24-54	1
RM 60 PE WOC	60	60	28-54	1
RM 80 PE WOC	80	80	48-71	1
RM 90 PE WOC	90	90	48-71	1
RM 120 PE WOC	120	120	67.5-99	1


1 CABLE/MODULE
MODULE TYPE 1

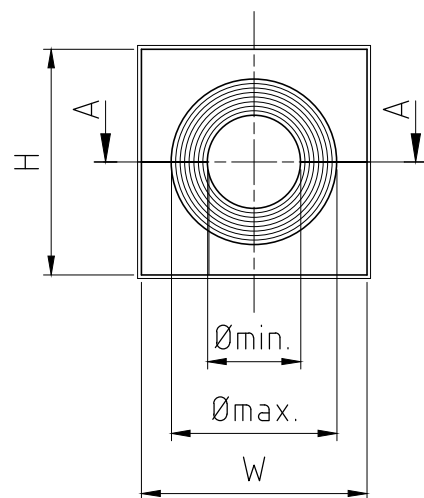




NOTE:
WOC= WITHOUT CENTER CORE

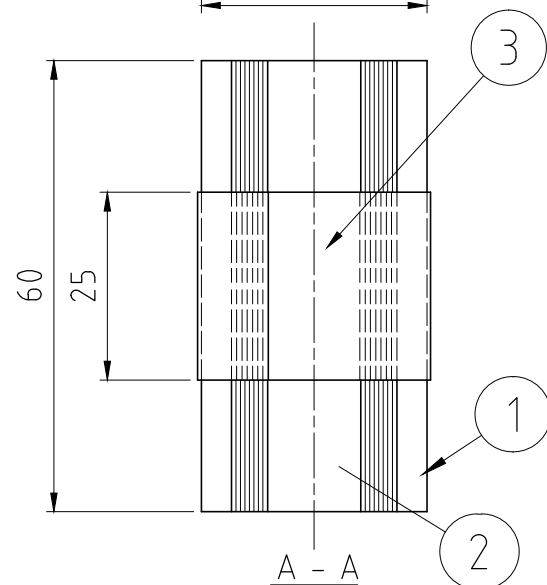

2 CABLES/MODULE
MODULE TYPE 2

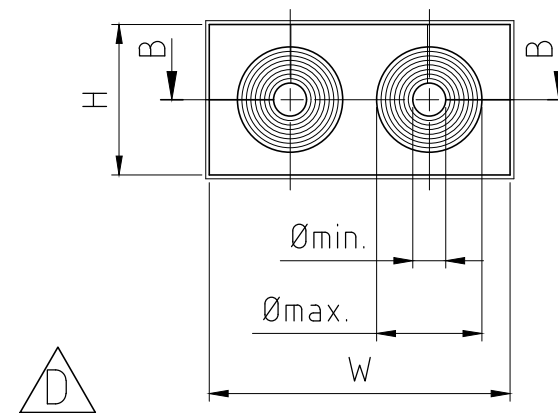

3 CABLES/MODULE
MODULE TYPE 3

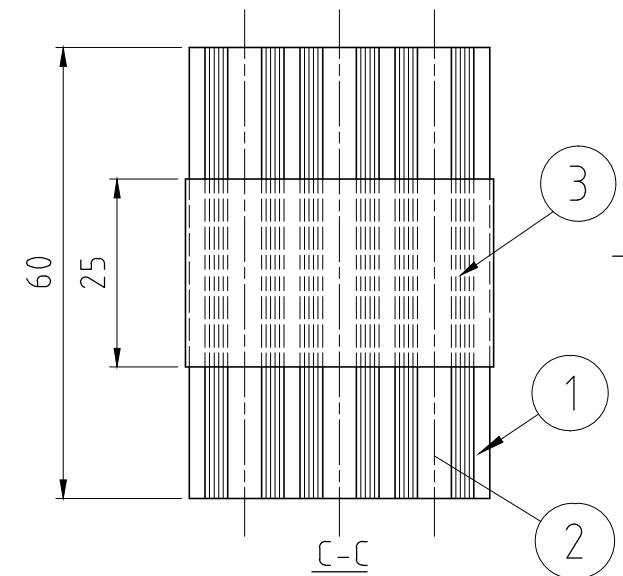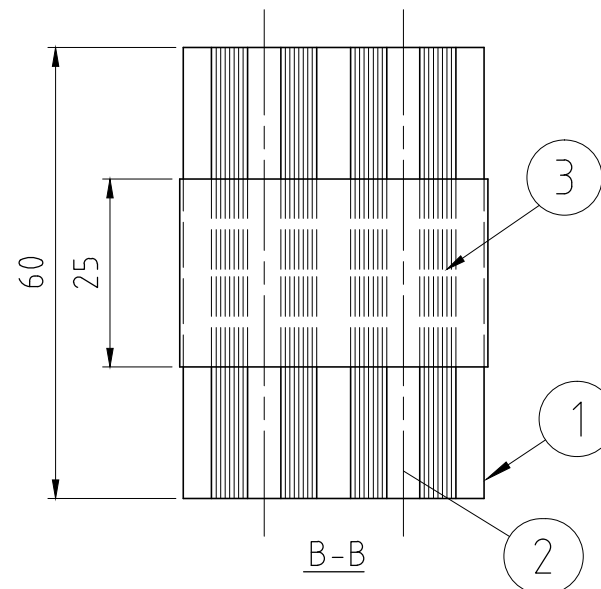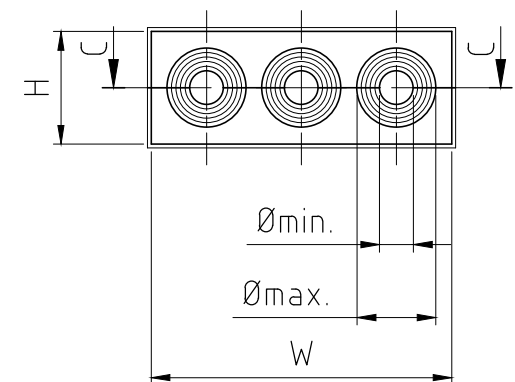

NOTE:

The range of the Roxtec Module indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable mantle.

D	RM 40H80 PE,MODULE TYPE,NOTE ADDED	2016-12-20	se-henols
Rev	Type of revision	Date	Sign

3	-	CONDUCTIVE TAPE		-			-		
2	-	CORE		ROXYLON			-		
1	-	RUBBER		ROXYLON			-		
Item	Qty	Designation		Specification			NetWeight		
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012		Designed by	tc_service	Created Date	2003-12-17	General tolerance ISO 2768-1/2-m/K EN ISO 13920-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5 -	TotWeight
		Approved by	se-milkar	Approved Date	2016-12-20	Title RM PE MODULES EMC ASSEMBLY			Projection method 
		Format	A3	Scale	1:1				
		Restricted due to Information drawing			Drawing number S1005752			Rev D	