
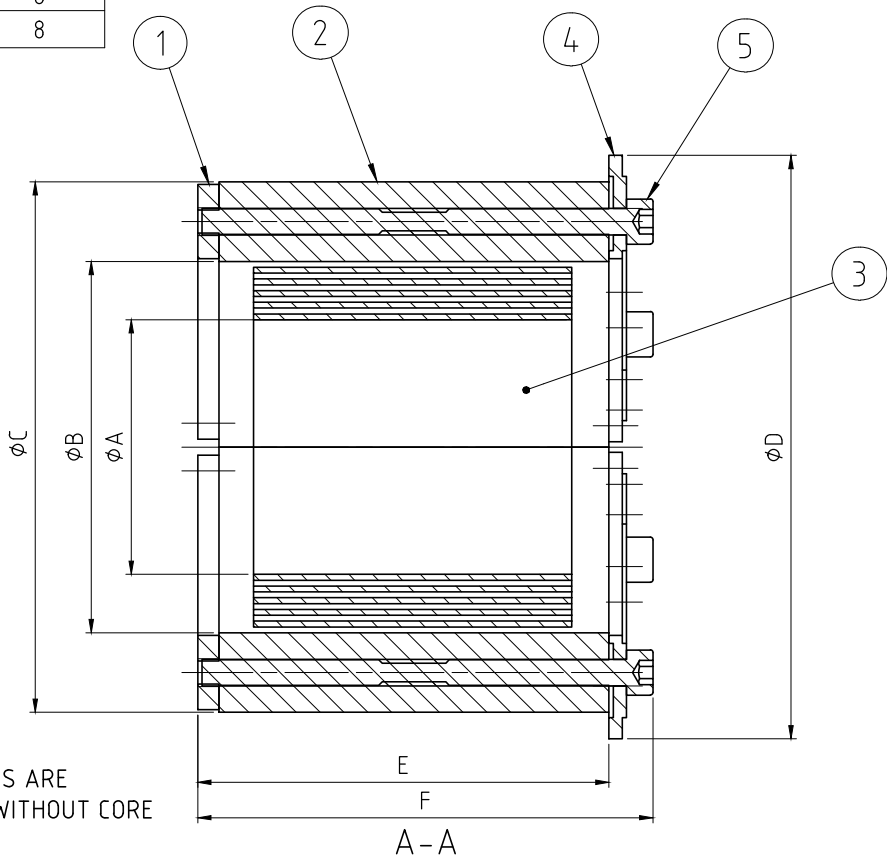


烙克塞克保留所有权利。未经授权严禁复制，
使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use
or disclosure to third parties is strictly forbidden.

TYPE	A	B	C	D	E	F	G	H (QTY.)
RS 100	48	70	100	110	78	86	4	6
RS 100 WOC	48	70	100	110	78	86	4	6
RS 125	66	98	125	145	79	88	5	6
RS 125 WOC	66	98	125	145	79	88	5	6
RS 150 WOC	93	119	150	170	79	88	5	8

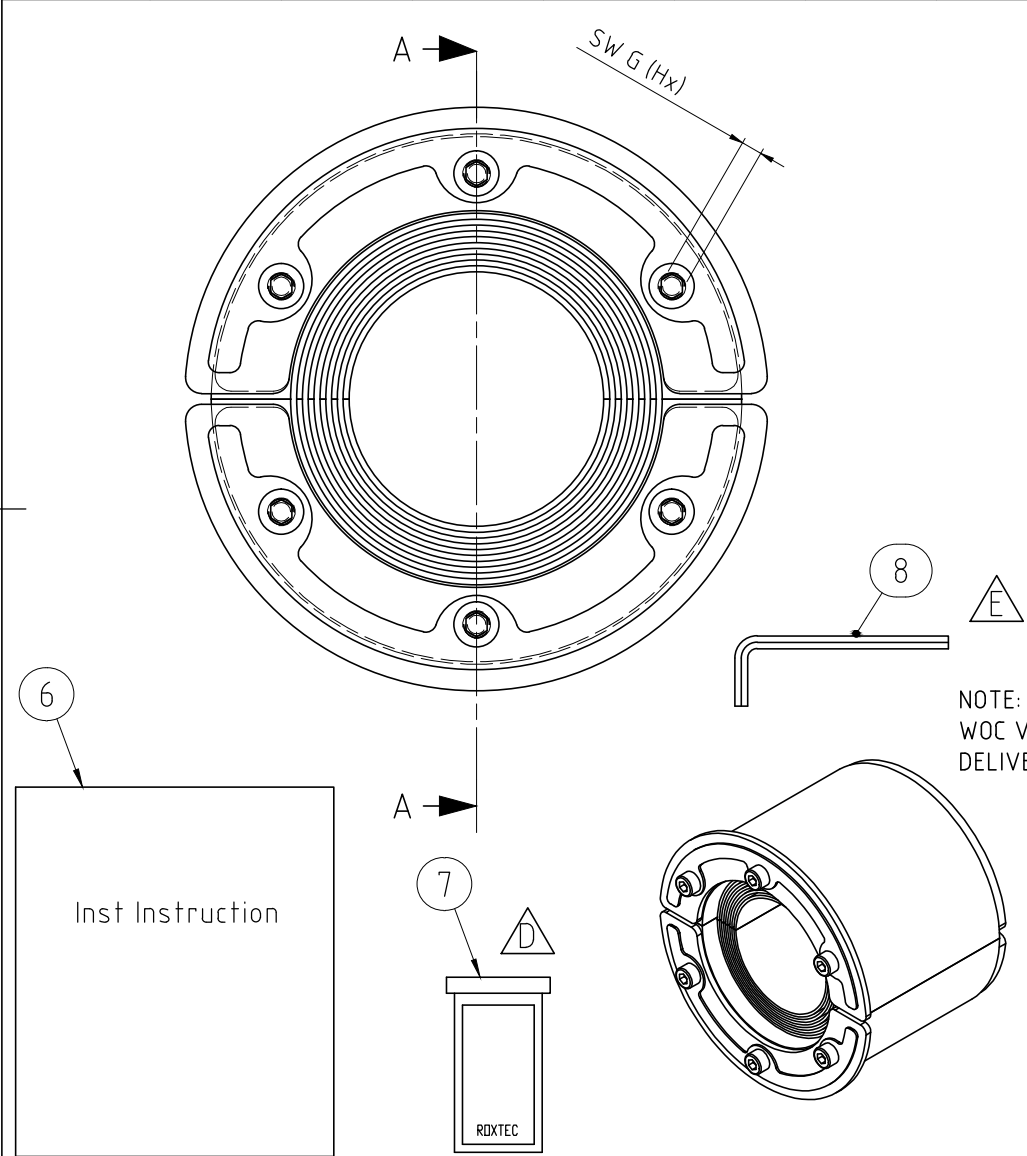

8	1	ALLEN KEY		-
7	1	LUBRICANT	25 ml	-
6	1	INSTALLATION INSTRUCTION	-	-
5	H	SCREW	DIN 912 MC6S A4	-
4	2	FRONT FITTING	ACID PROOF STAINLESS STEEL	-
3	1	CORE	ROXYLON	-
2	2	RUBBER FRAME	ROXYLON	-
1	2	REAR FITTING	ACID PROOF STAINLESS STEEL	-

Item	Qty	Designation	Specification	Net Weight
General Tolerance ISO 2768-1/2-m/K	Welded details EN ISO 5817-B	General surface roughness, Ra 12.5	Designed by tc_service	Created Date 2003-10-30
EN ISO 1920-BF	EN ISO 10042-B		Latest save date 2016-04-29	Format A3
			Scale 1:1	Sheet no
				Total Weight -
				Projection method 1st angle
				Rev E

E	ALLEN KEY ADDED	2016-04-29	se-jenboh
Rev	Type of revision	Date	Sign



RS SEALS

RS 100-150

Restricted due to

Information drawing

Drawing number

S1005510

Rev

E