

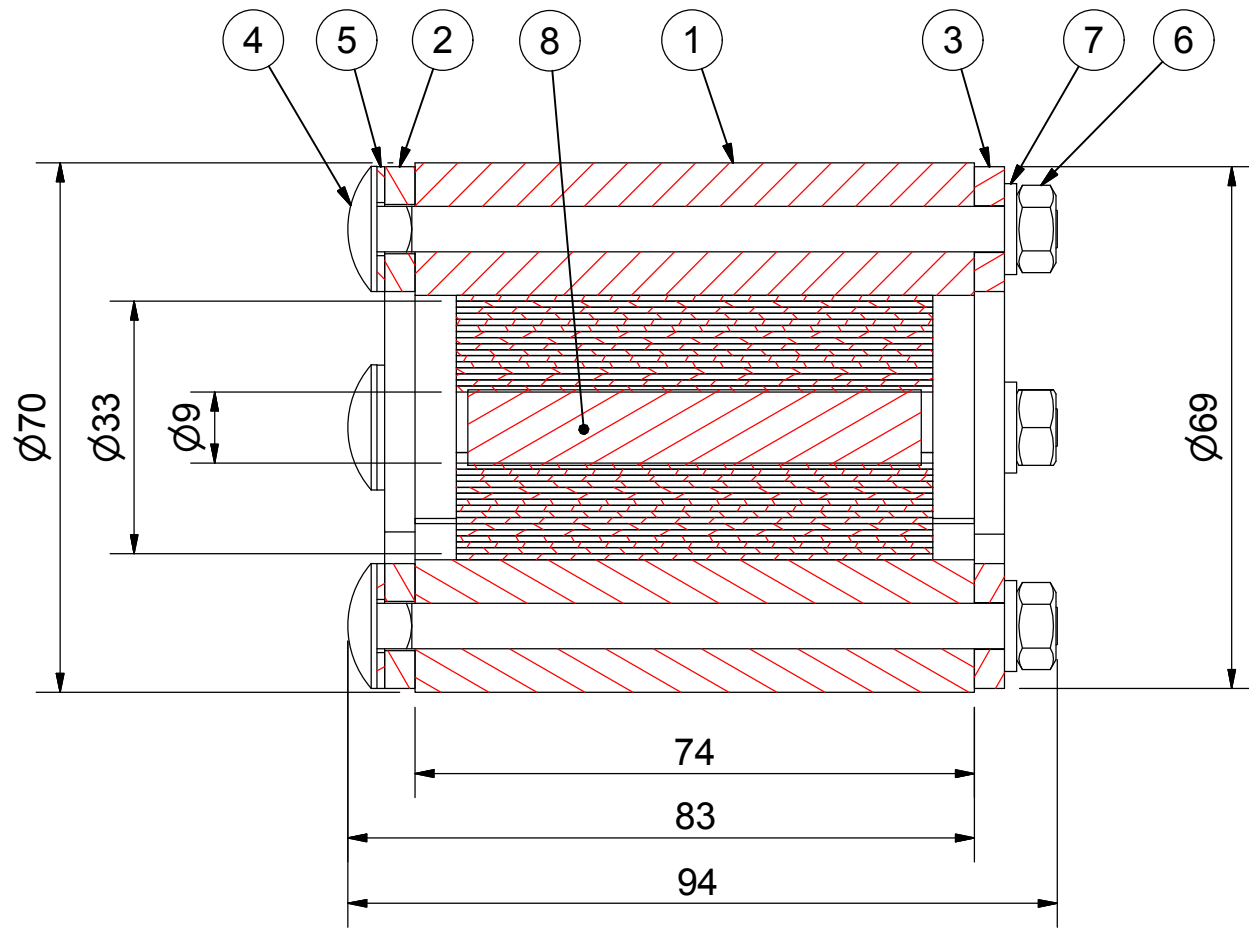
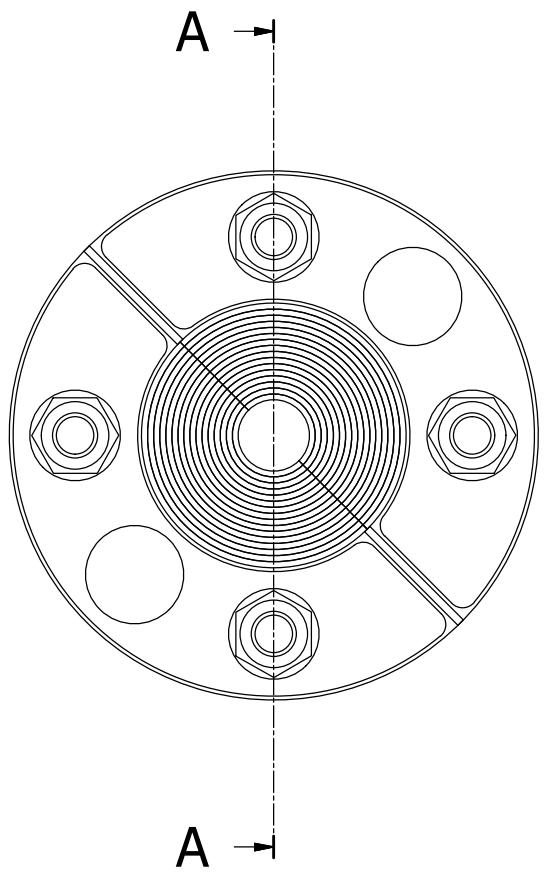


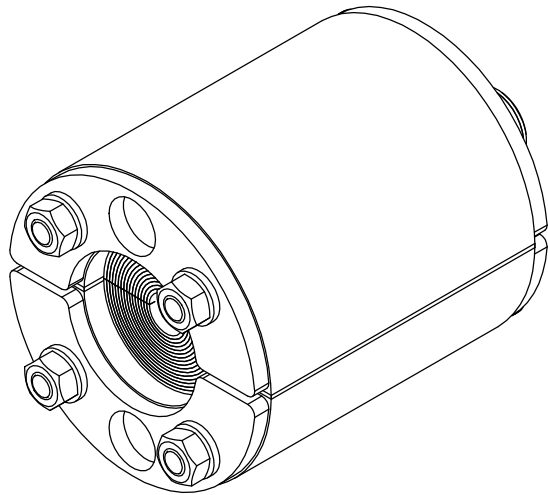

A-A (1 : 1)

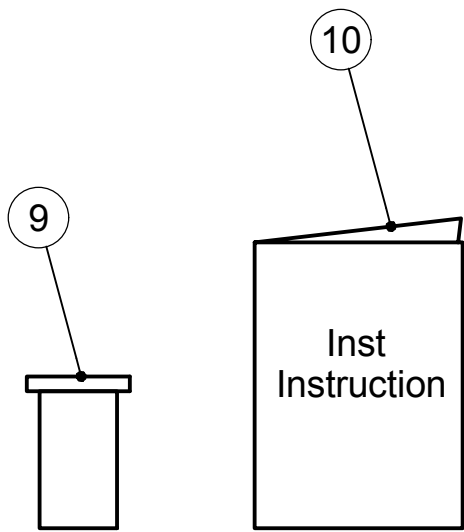

10	1	INSTALLATION INSTRUCTION		
9	1	LUBRICANT	10ml	
8	1	CORE	ROXYLON	0
7	4	WASHER	ISO 7089 M6 A4	0
6	4	NUT	ISO 4032 M6 A4	0
5	4	GASKET MVBF	M6, EPDM T=1	0
4	4	SCREW	MVBF M6x90 DIN 603 A4	0
3	2	FRONT FITTING	AISI 316, T=4mm	0
2	2	REAR FITTING	AISI 316, T=4mm	0
1	2	RUBBER FRAME	ROXYLON HE	0.1

ITEM	QTY	Designation	Specification	Weight
General tolerance:		Welded details:	General surface roughness:	Designed by/date
ISO 2768-1/2-m/K		EN ISO 5817-B	Ra 12.5	se-ronpet 2016-04-18
EN ISO 13920-BF		EN ISO 10042-B		Latest save date
				2016-04-18
			Format	Scale
			A3	
			Sheet no	1 / 1
				TotWeight
				0,5 kg



Roxtec


www.roxtec.com

Title
RS UG SEALING
RS 70 UG INSERTABLE

Restricted due to
Information drawing

Drawing number

S1511762



Rev

A

A		2016-04-18	se-ronpet
Rev	Type of revision	Date	Sign