
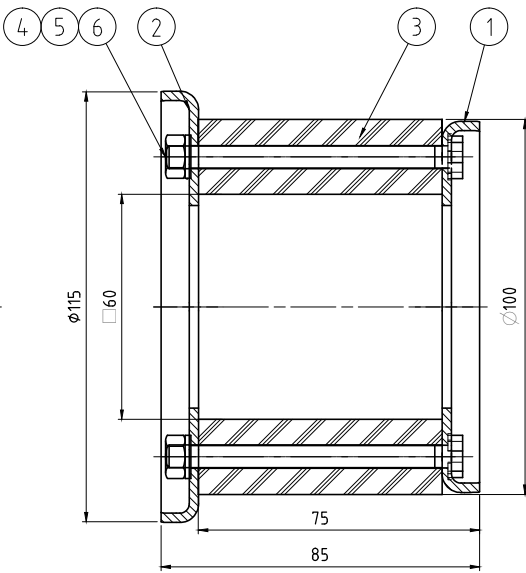
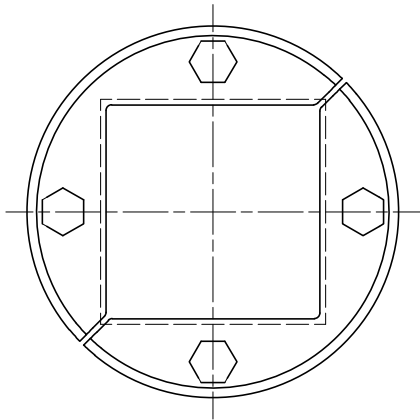




烙克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

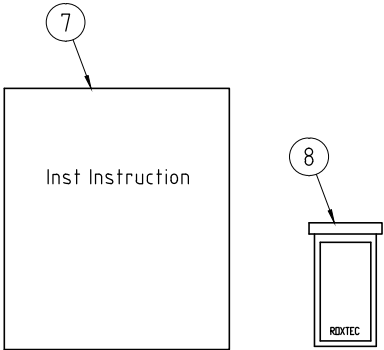

A-A

NOTE:
GALVANIZED FITTINGS ARE POWDER COATED BLACK

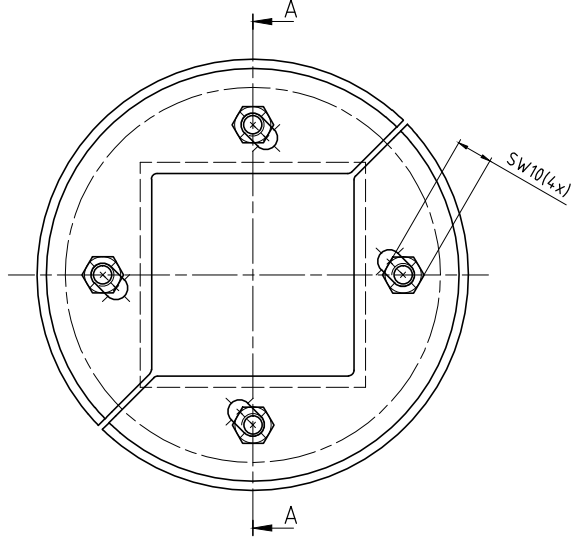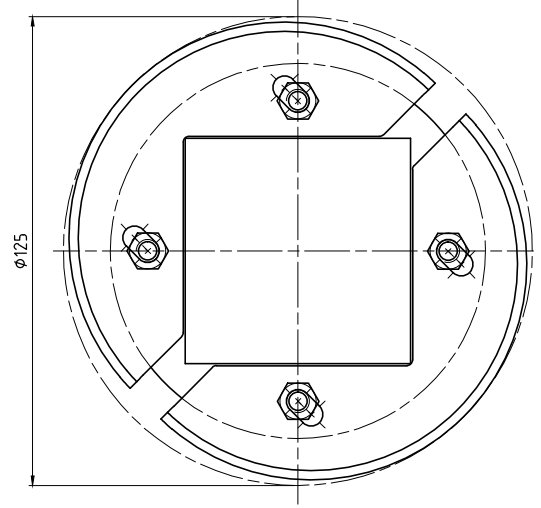

8	1	LUBRICANT	TALLOW 10 ml	-
7	1	INSTALLATION INSTRUCTION		-
6	4	WASHER	DACROLIT/A4	-
5	4	NUT	DACROLIT/A4	-
4	4	SCREW	DACROLIT/A4	-
3	1	RUBBER FRAME	ROXYLON	-
2	2	FRONT FITTING	GALV / ACID PROOF ST. STEEL	-
1	2	REAR FITTING	GALV / ACID PROOF ST. STEEL	-
Item	Qty	Designation	Specification	Net Weight
General tolerance ISO 1106-1/2-2011 EN ISO 1101-2011 EN ISO 1101-2011	Material details EN ISO 10017-2 EN ISO 10017-2	General surface roughness, Ra 12.5	Designed by fc service Created Date 2003-10-30 Last save date 2017-05-31 Format A2 Scale 1:1 Sheet no	Total weight -
Roxtec www.roxtec.com				
R FRAMES R 100 Restricted due to Information drawing				
Drawing number S1005512				
Rev C				

C	PARTSLIST UPDATED	2017-05-30	se-jenboh
Rev	Type of revision	Date	Sign