



烙克塞克保留所有权利。未经授权严禁复制，
 使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use
 or disclosure to third parties is strictly forbidden.

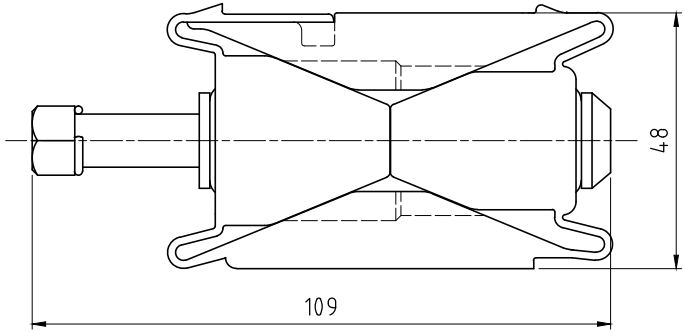


COMPRESSED

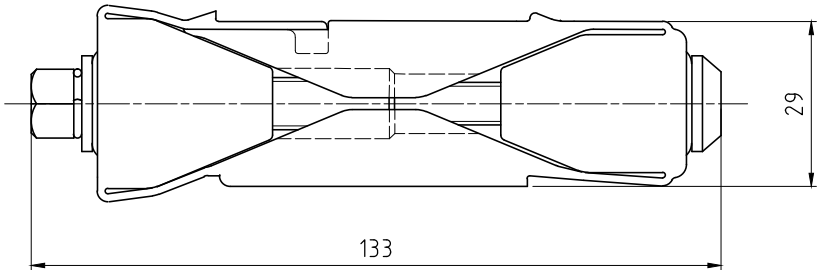

UNCOMPRESSED

AVAILABLE WITH ACID PROOF STAINLESS
 STEEL FITTINGS OR GALVANIZED FITTINGS.

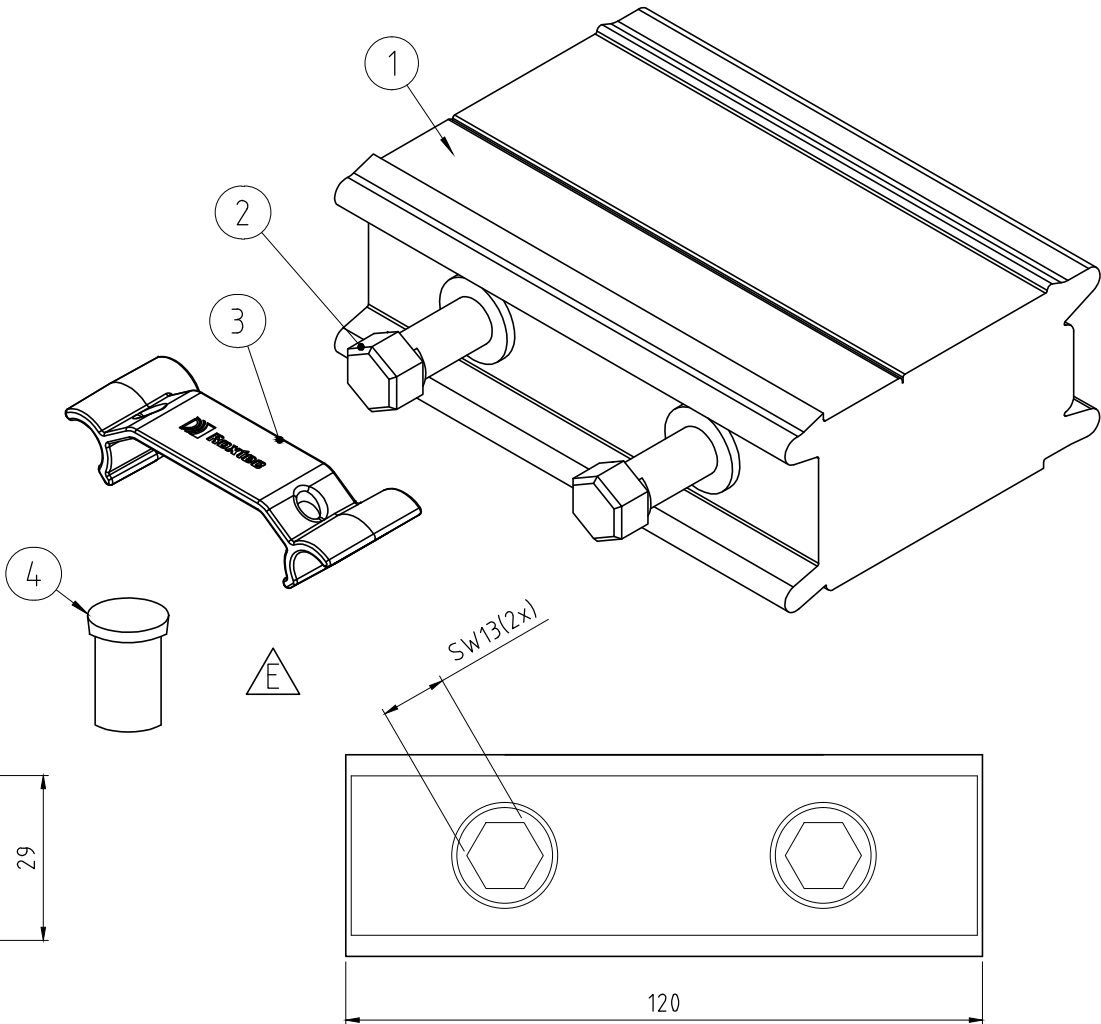

4	1	ROXTEC LUBRICANT	25ML TALLOW									
3	1	WEDGE CLIP	PLASTIC									
2	1	SCREW	ACID PROOF ST. STEL / GALVANIZED									
1	1	ROXTEC WEDGE BODY	ROXYLON									
Item	Qty	Designation	Specification						Net Weight			
General Tolerance EN ISO 2768-1/2-m/K EN ISO 1920-BF		Welded details EN ISO 5817-B EN ISO 10042-B		General surface roughness, Ra 12.5		Designed by tc_service	Created Date 2003-11-03	Latest save date 2017-05-15	Format A3	Scale 1:1	Sheet no	TotWeight -
 Roxtec www.roxtec.com		Title ROXTEC WEDGE WEDGE 120									Projection method 	
		Restricted due to Information drawing						Drawing number S1005546			Rev E	

E	LUBRICANT ADDED.	2017-05-15	se-jenboh
Rev	Type of revision	Date	Sign