
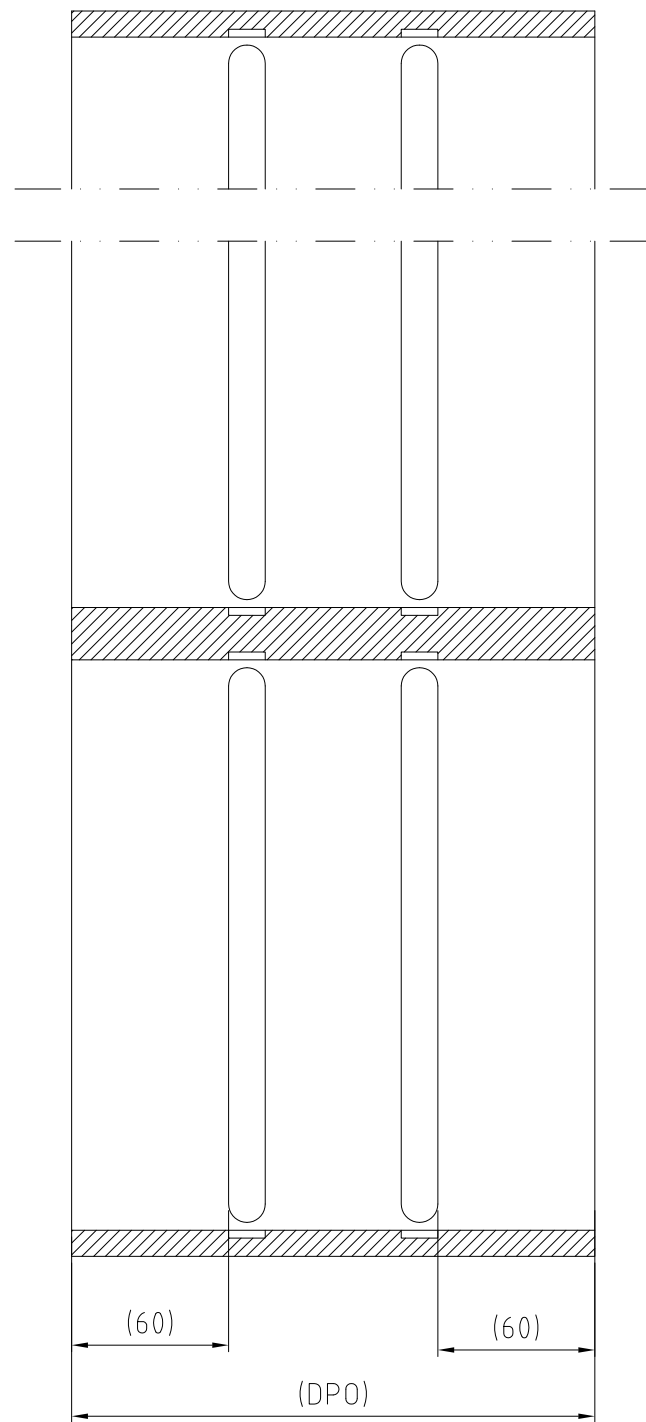


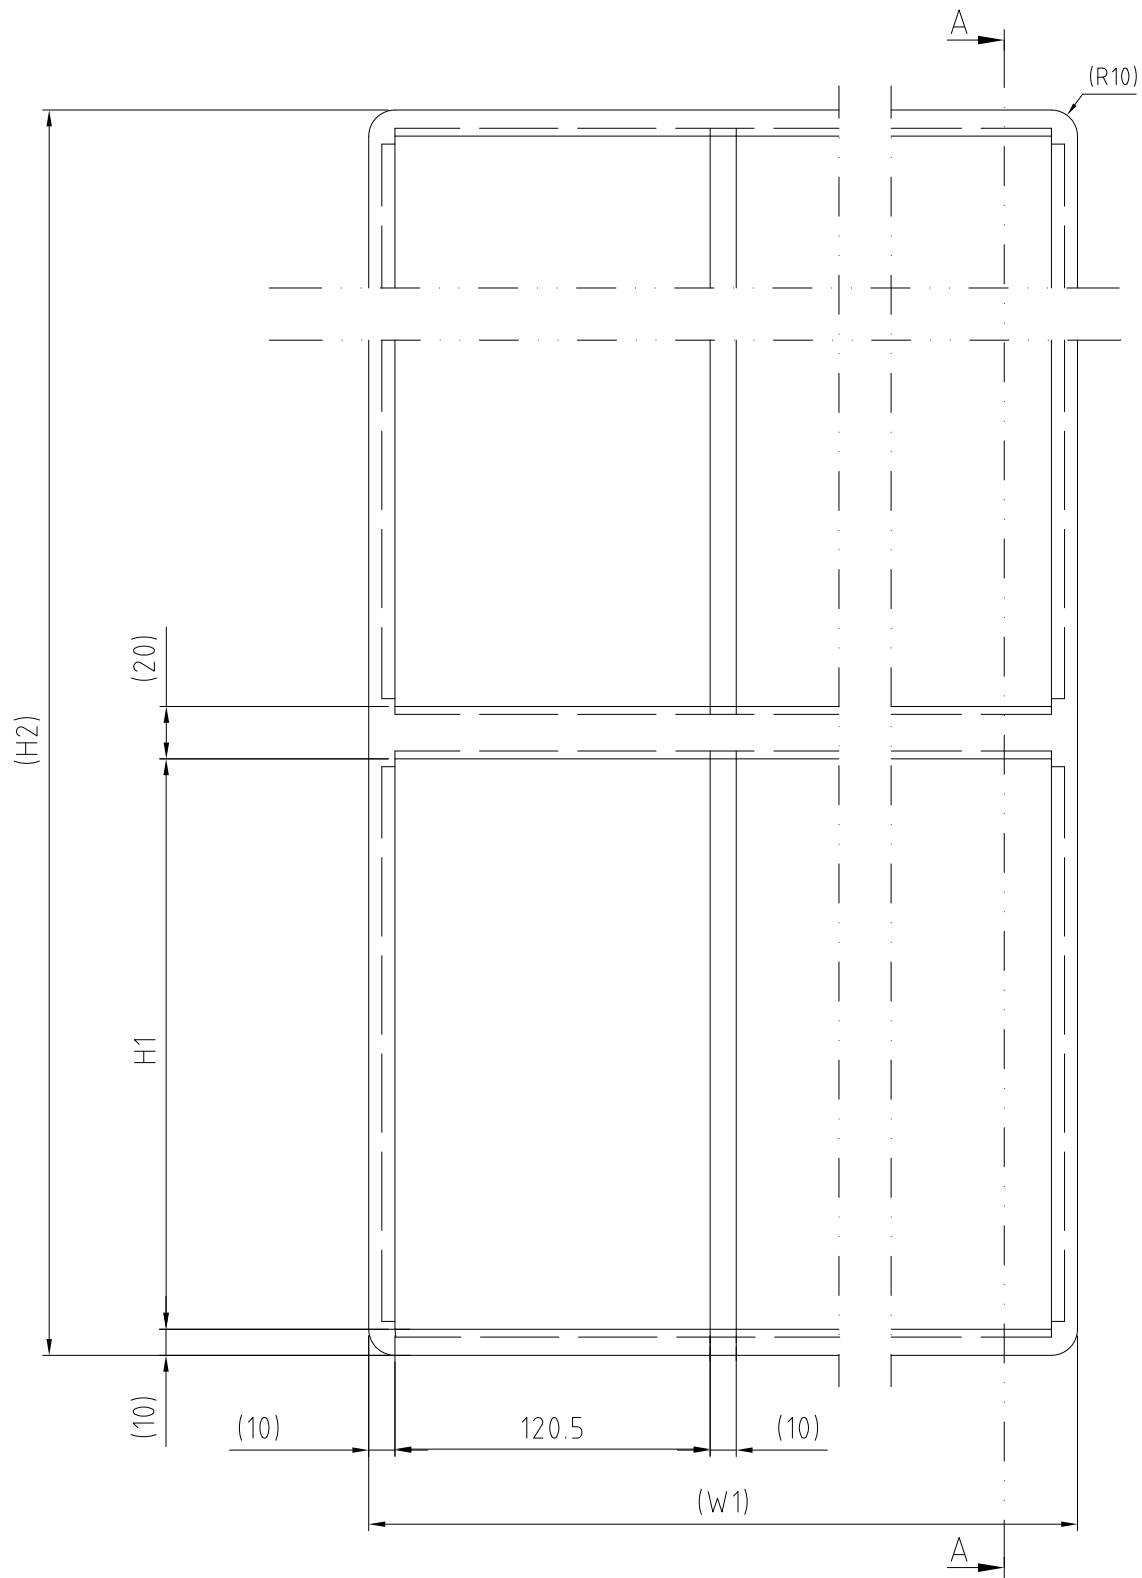

COMBINATION:

TYPE	H1 (mm)	H2 (mm)
SBTB 2+2xN	101	242
SBTB 4+4xN	159.5	359
SBTB 6+6xN	218	476
SBTB 8+8xN	278	596
SBTB 2+2+2xN	101	363
SBTB 4+4+4xN	159.5	538.5
SBTB 6+6+6xN	218	714
SBTB 8+8+8xN	278	894
SBTB 2+2+2+2xN	101	484
SBTB 4+4+4+4xN	159.5	718
SBTB 6+6+6+6xN	218	952
SBTB 8+8+8+8xN	278	1192

WIDTH:

TYPE	W1 (mm)
x2	271
x3	401.5
x4	532
x5	662.5
x6	793
x7	923,5
x8	1054
x9	1184,5
x10	1315

SPECIAL COMBINATION:

COMB.	SIZE (mm)	W (mm)	H2 (mm)
xN	H1	130,5xN+10	Rx(H1+20)



R=TOTAL NUMBERS OF ROWS

DPO= DIMENSION VIA PURCHASE ORDER
STANDARD DPO = 200

E	ADDED TABLE	2014-03-17	se-luckri
Rev	Type of revision	Date	Sign

Item	Qty	Designation	Specification						NetWeight
General Tolerance EN 2768-1/2-m/K EN ISO 1926-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Designed by	Created Date	Approved by	Approved Date	Format	Scale	TotWeight
			se-camsve	2003-12-19	se-jenboh	2014-03-21	A2	1:2	
 www.roxtec.com			Title						Projection method 
			SBTB FRAME (M)						
			+ COMBINATION FRAME						
Restricted due to			Drawing number				Rev		
Information Drawing			S1005766				E		