

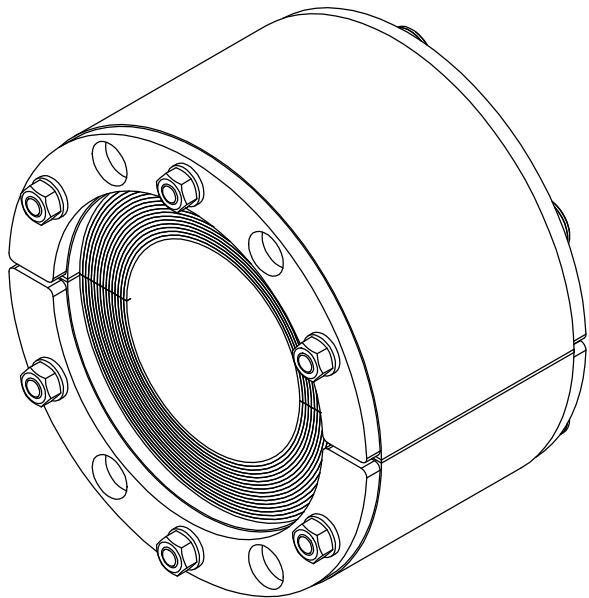
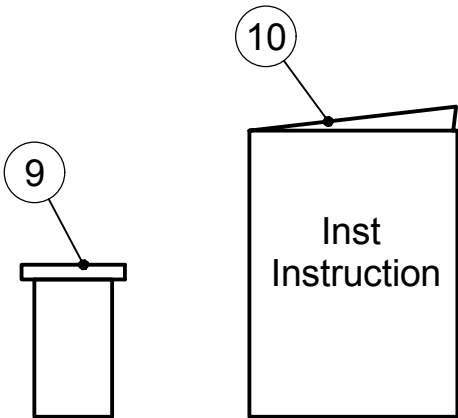


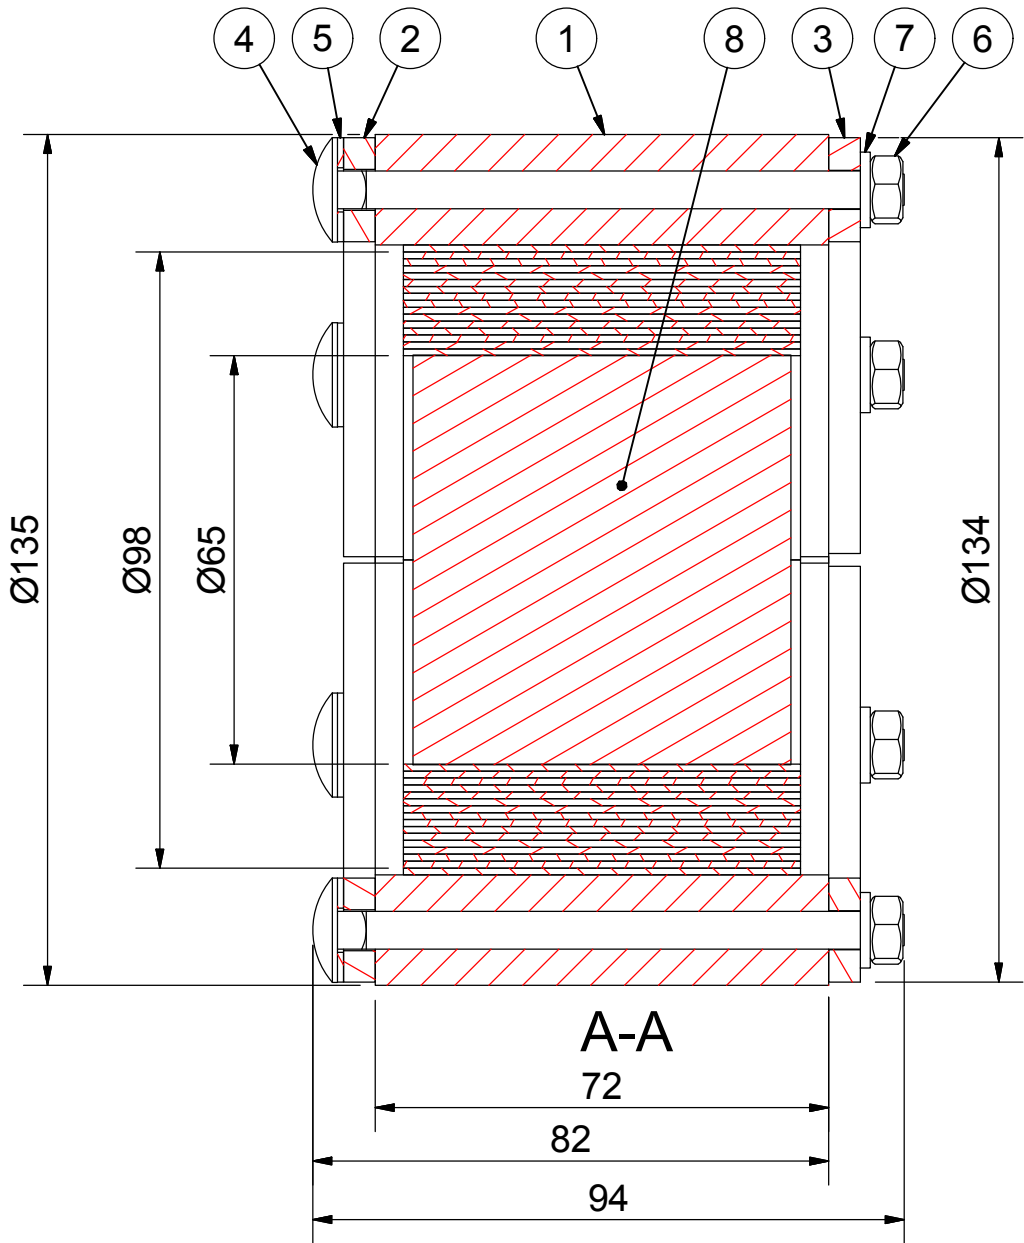

|    |   |                          |                       |  |
|----|---|--------------------------|-----------------------|--|
| 10 | 1 | INSTALLATION INSTRUCTION |                       |  |
| 9  | 1 | LUBRICANT                | 10 ml                 |  |
| 8  | 1 | CORE                     | ROXYLON               |  |
| 7  | 6 | WASHER                   | ISO 7089 M6 A4        |  |
| 6  | 6 | NUT                      | ISO 4032 M6 A4        |  |
| 5  | 6 | GASKET MVBF              | M6, EPDM T=1          |  |
| 4  | 6 | SCREW                    | MVBF M6x90 DIN 603 A4 |  |
| 3  | 2 | FRONT FITTING            | AISI 316, T=5 mm      |  |
| 2  | 2 | REAR FITTING             | AISI 316, T=5 mm      |  |
| 1  | 2 | RUBBER FRAME             | ROXYLON HE            |  |

| ITEM                                                      | QTY | Designation                                        | Specification                            | Weight                                   |
|-----------------------------------------------------------|-----|----------------------------------------------------|------------------------------------------|------------------------------------------|
| General tolerance:<br>ISO 2768-1/2-m/K<br>EN ISO 13920-BF |     | Welded details:<br>EN ISO 5817-B<br>EN ISO 10042-B | General surface<br>roughness:<br>Ra 12.5 | Designed by/date<br>se-ronpet 2016-04-15 |
|                                                           |     |                                                    |                                          | Latest save date<br>2016-04-18           |
|                                                           |     |                                                    |                                          | Format<br>A3                             |
|                                                           |     |                                                    |                                          | Scale                                    |
|                                                           |     |                                                    |                                          | Sheet no<br>1 / 1                        |
|                                                           |     |                                                    |                                          | TotWeight<br>1,6 kg                      |
|                                                           |     |                                                    |                                          | Projection<br>method                     |
|                                                           |     |                                                    |                                          | Rev<br>A                                 |

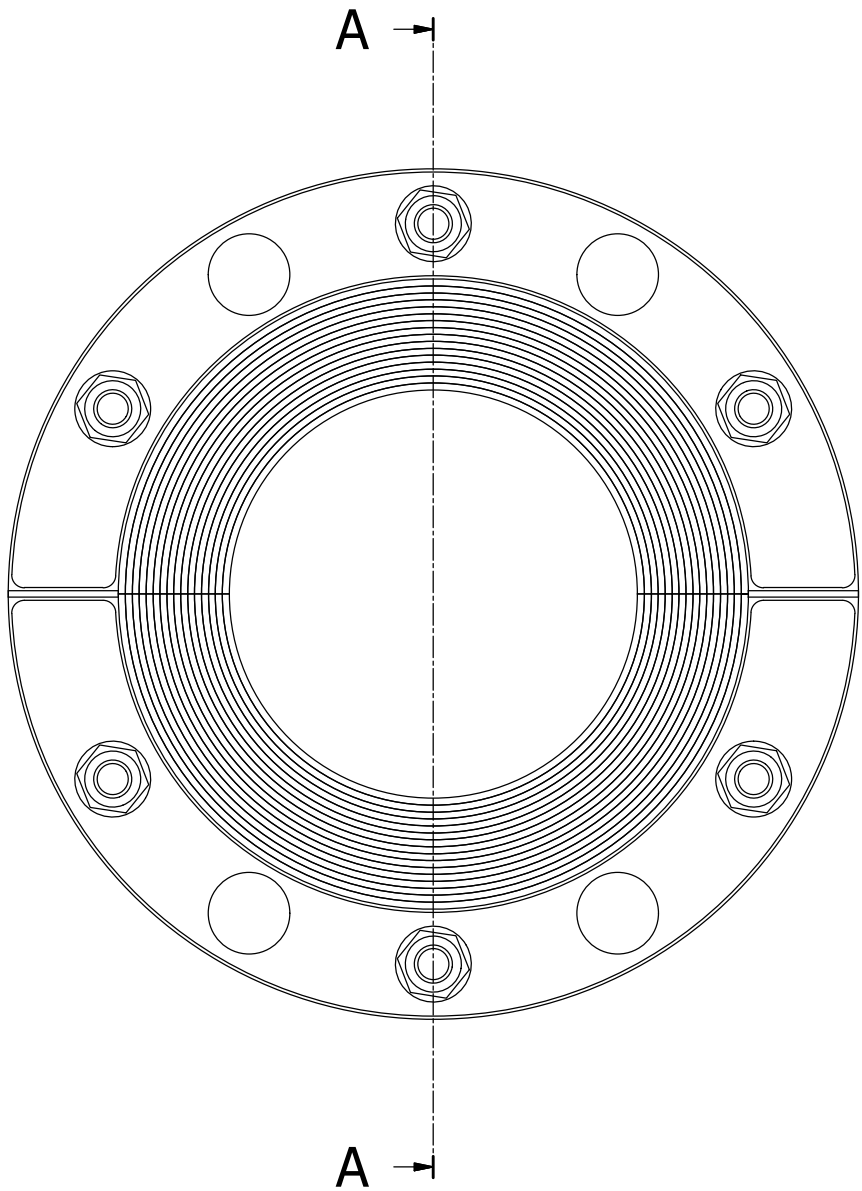

www.roxtec.com

RS UG SEALING  
RS 135 UG INSERTABLE

Restricted due to  
Information drawing

Drawing number

S1511713