

RM ES MODULES


	W (mm)	H (mm)	CABLE ϕ (mm)	MODULE TYPE
RM 15 ES	15	15	0+3 - 11	1
RM 15W40 ES	40	15	0+3.5 - 10.5	3
RM 20 ES	20	20	0+4 - 14.5	1
RM 20W40 ES	40	20	0+3.5 - 16.5	2
RM 30 ES	30	30	0+10 - 25	1
RM 30H90 ES	30	90	0+10 - 25	1
RM 40 ES	40	40	0+21.5 - 34.5	1
RM 40H80 ES	40	80	0+21.5 - 34.5	1
RM 40 10-32 ES	40	40	0+9.5 - 32.5	1
RM 60 ES	60	60	0+28 - 54	1
RM 60 24-54 ES	60	60	0+24 - 54	1
RM 80 ES	80	80	0+48 - 71	1
RM 90 ES	90	90	0+48 - 71	1
RM 120 ES	120	120	0+67.5 - 99	1
RM 60 ES WOC	60	60	28 - 54	1
RM 80 ES WOC	80	80	48 - 71	1
RM 90 ES WOC	90	90	48 - 71	1
RM 120 ES WOC	120	120	67.5 - 99	1

NOTE:

WOC = WITHOUT CENTER CORE

NOTE:

Cable ϕ of the Roxtec Module indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable sheath.

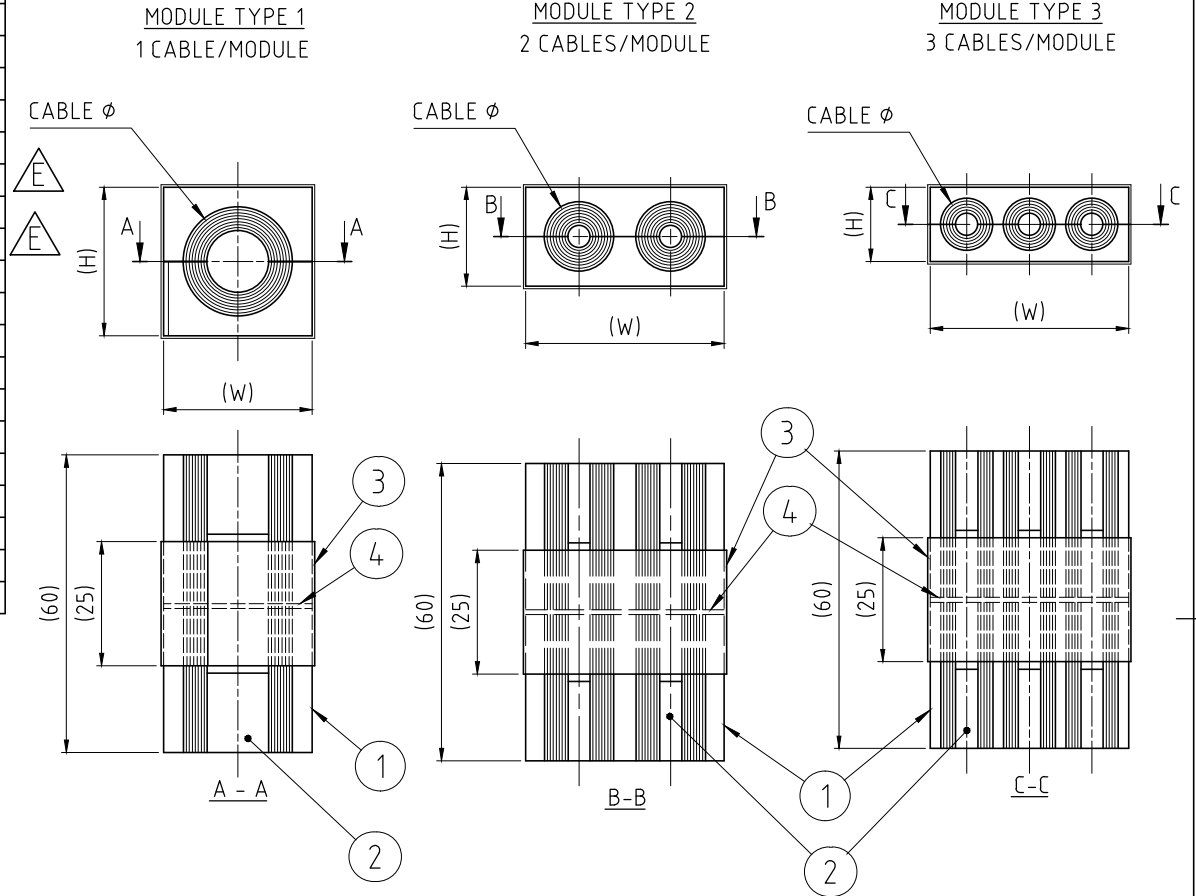

4	-	CONDUCTIVE RUBBER	-	-	
3	-	CONDUCTIVE TAPE	-	-	
2	-	CORE	ROXYLON	-	
1	-	RUBBER	ROXYLON	-	
Item	Qty	Designation	Specification		Net Weight
General tolerance ISO 2768-1/2-M/K EN ISO 19920-BF		Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Designed by tc service	Created Date 2003-12-17
				Latest save date 2017-03-16	Format A3
				Scale 1:1	Sheet no
					Tot Weight -
					Projection method 
 Roxtec www.roxtec.com		Title RM ES MODULES EMC ASSEMBLY Restricted due to		Drawing number S1005750	Rev E
		Information drawing			