
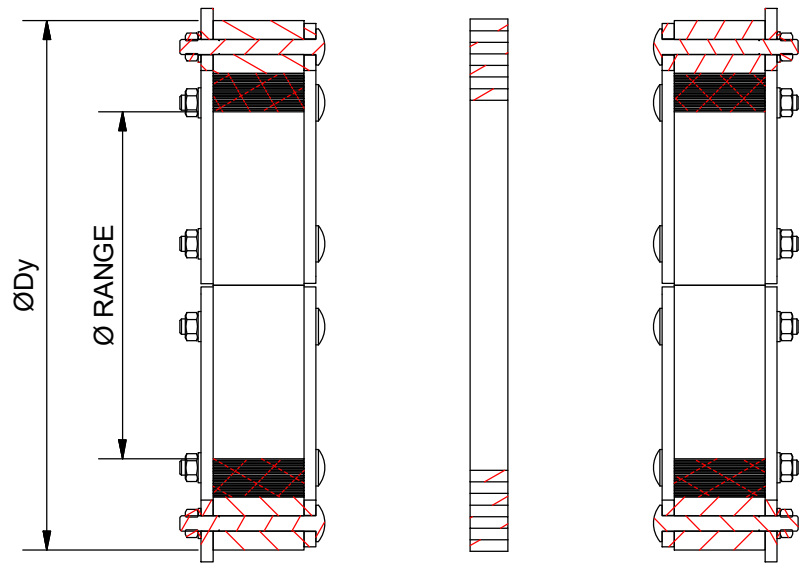
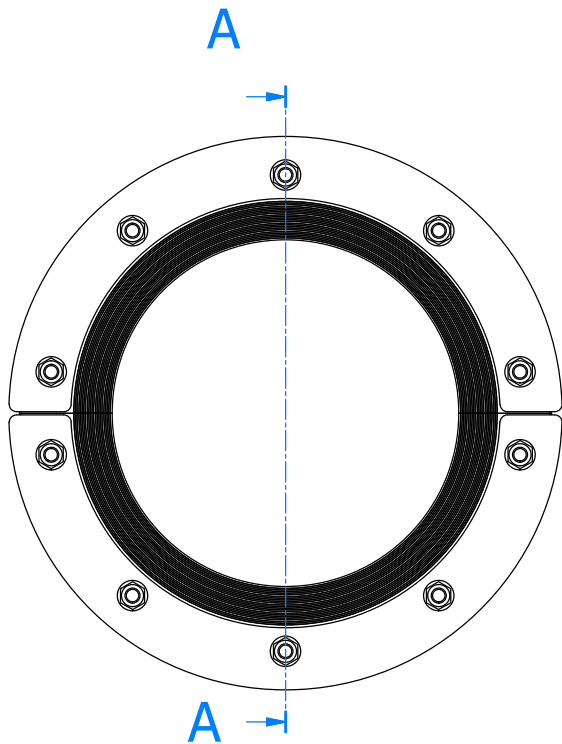


烙克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

RS PPS SEAL		
SEAL	Ø RANGE (mm)	Dy (mm)
RS PPS 225	151-181	225
RS PPS 250	176-206	250
RS PPS 300	206-236	300
RS PPS 350	244-286	350
RS PPS 400	294-336	400

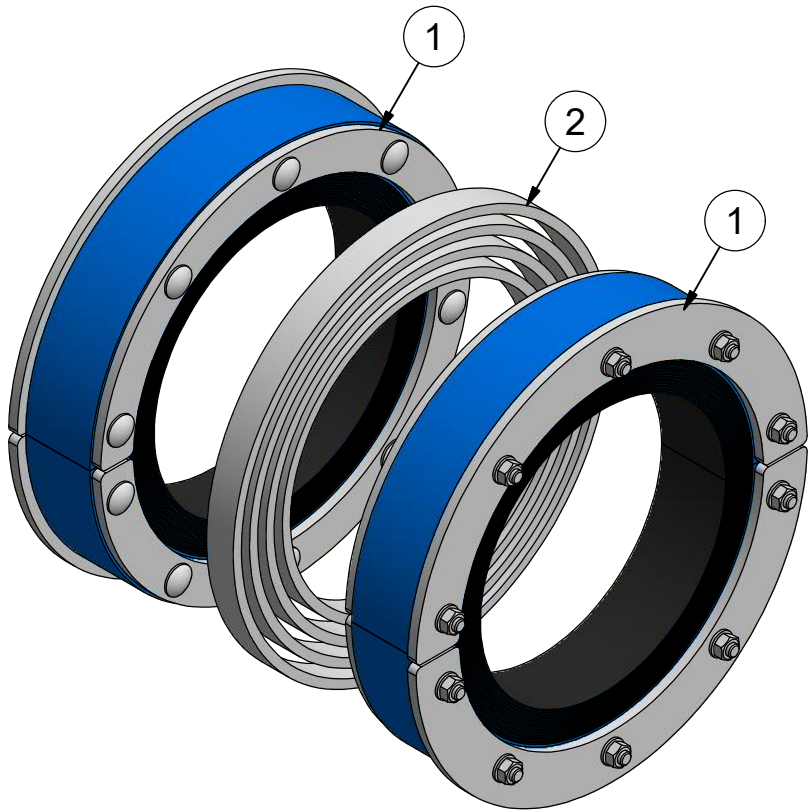

A-A (1 : 5)



2	1	INTUMESCENT MATERIAL		SELF ADHESIVE ROLL						
1	2	RS SEAL		ROXYLON / ACID PROOF STAINLESS STEEL						
ITEM	QTY	Designation			Specification		Weight			
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B		General surface roughness: Ra 12.5		Designed by/date se-jenboh 2007-12-14	Approved by/date	Format A3	Scale 1:-	TotWeight
 Roxtec www.roxtec.com		Title RS PPS SEALS RS PPS 225-400								Projection method 
		Restricted due to Information drawing					Drawing number S1012814		Rev B	

B	TABLE UPDATED.	2014-03-28	se-jenboh
Rev	Type of revision	Date	Sign