



烙克塞克保留所有权利。未经授权严禁复制，
使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use
or disclosure to third parties is strictly forbidden.




RS PPS/S	A	B	Dy	L	P
31	4	17	31	40	2,5
43	4	23	43	75	4
50	8	30	50	75	4
68	26	48	68	75	4
75	24	54	75	75	4
100 WOC	48	70	100	75	4
125 WOC	66	98	125	75	5
150 WOC	93	119	150	75	5

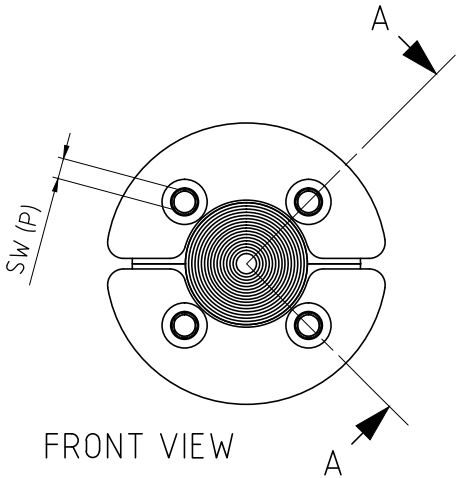

FRONT VIEW



REAR VIEW

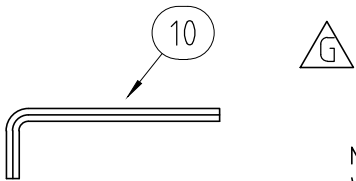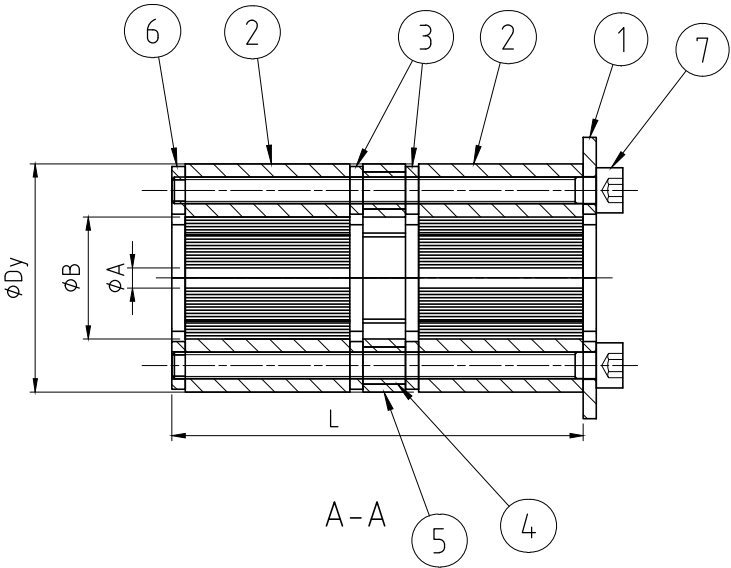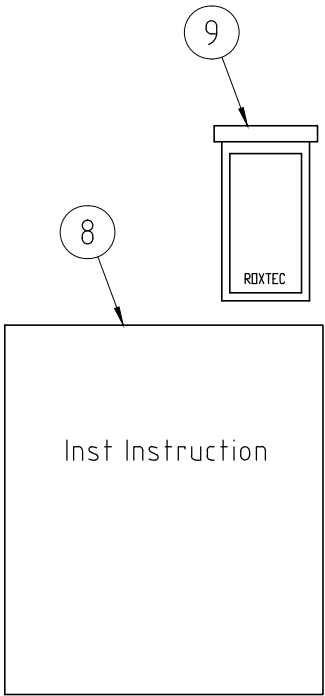

NOTE:
WOC VERSION IS WITHOUT CORE.

10	1	ALLEN KEY						
9	1	LUBRICANT						
8	1	INSTALLATION INSTRUCTION						
7	-	SCREW	A4					
6	2	REAR FITTING	ACID PROOF STAINLESS STEEL					
5	-	INTUMESCENT MATERIAL						
4	-	CASE	ACID PROOF STAINLESS STEEL					
3	4	MIDDLE FITTING	ACID PROOF STAINLESS STEEL					
2	2	RUBBER FRAME	ROXYLON					
1	2	FRONT FITTING	ACID PROOF STAINLESS STEEL					
Item	Qty	Designation	Specification		Net Weight			
General tolerance ISO 2768-1/2-m/K EN ISO 19228-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Designed by se-henols	Created Date 2007-04-17 Latest save date 2016-04-29	Format A3	Scale 1:1	Sheet no	TotWeight -
 www.roxtec.com			Title RS PPS/S SEALS RS PPS/S 31-150					
			Restricted due to Information drawing		Drawing number S1011273			
							Rev G	

G	ALLEN KEY ADDED.	2016-04-25	se-jenboh
Rev	Type of revision	Date	Sign