

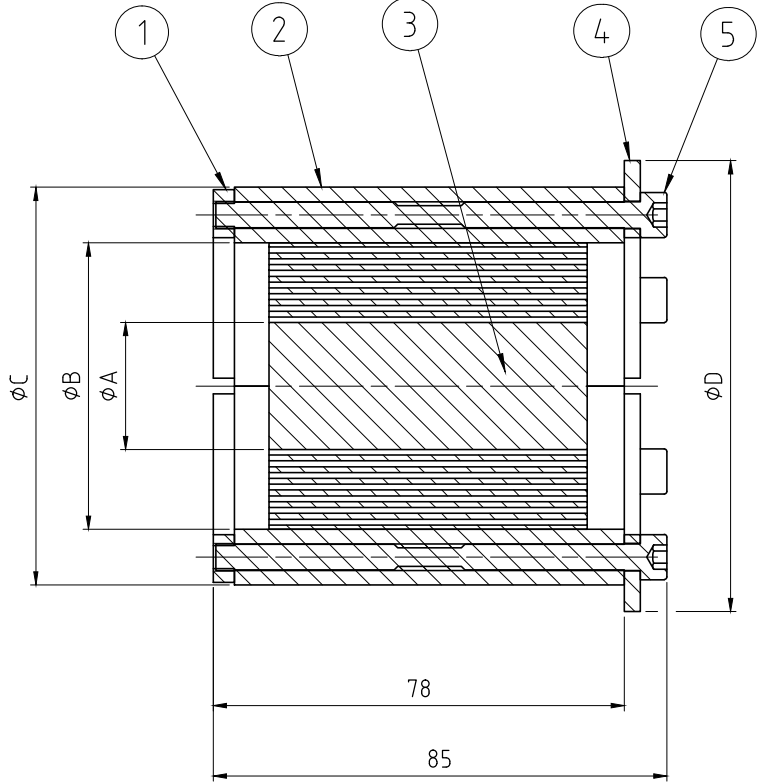

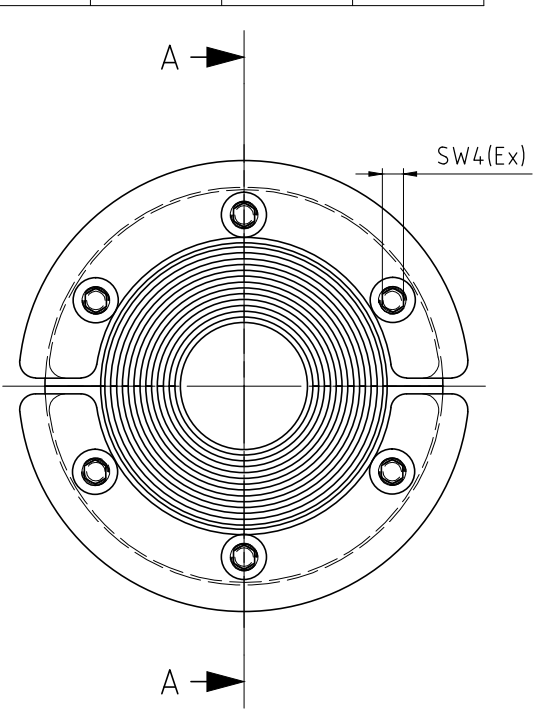



TYPE	A	B	C	D	E (Qty)
RS 43	4	23	43	53	4
RS 50	8	30	50	60	4
RS 68	26	48	68	78	4
RS 75	24	54	75	85	6

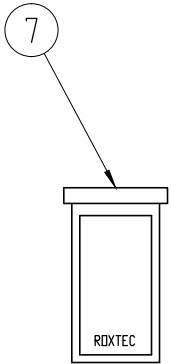

A-A

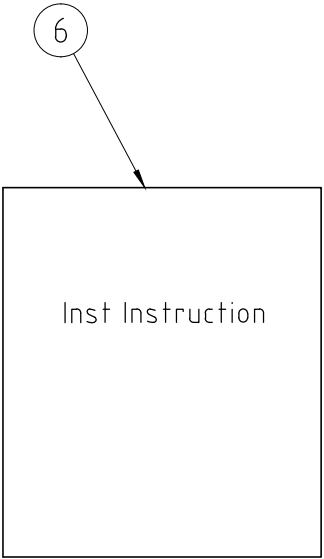

8	1	ALLEN KEY			-				
7	1	LUBRICANT	10 ml		-				
6	1	INSTALLATION INSTRUCTION	-		-				
5	E	SCREW	DIN 912 MC6S A4		-				
4	2	FRONT FITTING	ACID PROOF STAINLESS STEEL		-				
3	1	CORE	ROXYLON		-				
2	2	RUBBER FRAME	ROXYLON		-				
1	2	REAR FITTING	ACID PROOF STAINLESS STEEL		-				
Item	Qty	Designation	Specification			Net Weight			
General tolerance ISO 2768-1/2-m/K EN ISO 1920-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Designed by tc_service	Created Date 2003-10-30	Latest save date 2016-04-29	Format A3	Scale 1:1	Sheet no	Total Weight -
 Roxtec www.roxtec.com			Title RS SEAL RS 43-75 Restricted due to Information drawing			Drawing number S1005509			Projection method  Rev F

F	ALLEN KEY ADDED	2016-04-29	se-jenboh
Rev	Type of revision	Date	Sign