


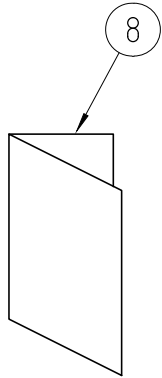


RS PE SEALS


SIZE	A	D	RANGE ϕ	L
RS 25 PE	32	25	0+3.6-12	41,5
RS 31 PE	37	31	0+4-17	41,5

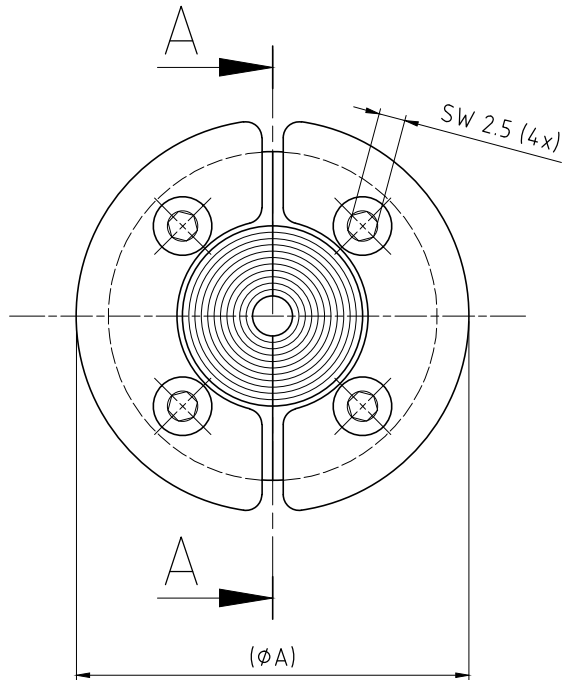

NOTE:

The range of the Roxtec Seal indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable mantle.

D	ALLEN KEY ADDED	2016-05-03	se-jenboh
Rev	Type of revision	Date	Sign

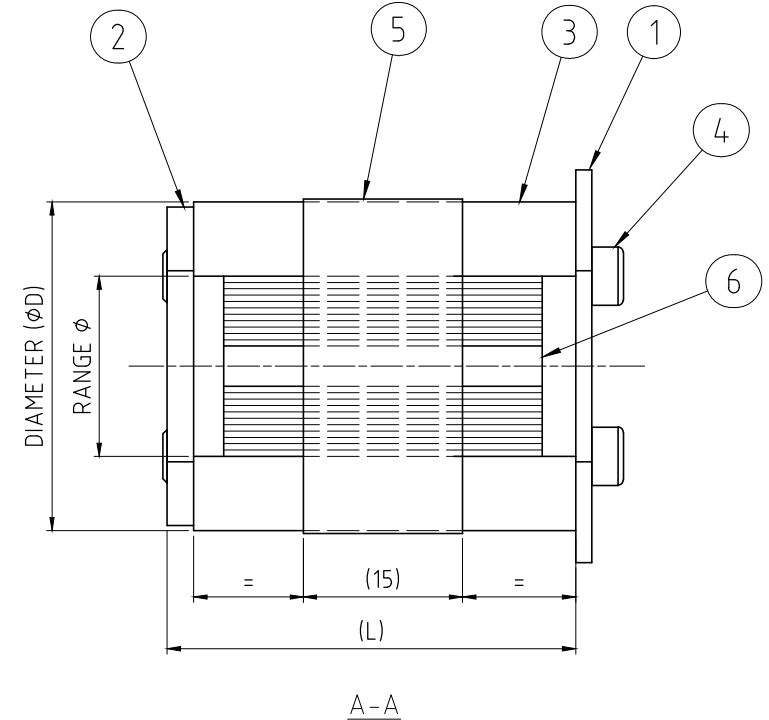

9	1	ALLEN KEY		-
8	1	INSTALLATION INSTRUCTION		-
7	1	ROXTEC LUBRICANT	10 ML	-
6	1	CORE	ROXYLON	-
5	2	CONDUCTIVE TAPE	TIN PLATED COPPER	-
4	4	SCREW	MC6S A4	-
3	2	RUBBER FRAME	ROXYLON	-
2	2	REAR FITTING	ACID PROOF STAINLESS STEEL	-
1	2	FRONT FITTING	ACID PROOF STAINLESS STEEL	-
Item	Qty	Designation	Specification	Net Weight
General Tolerance ISO 2768-1/2-m/K	Welded details EN ISO 5817-B	General surface roughness, Ra 12.5	Designed by tc_service	Created Date 2004-01-13
EN ISO 1920-BF	EN ISO 10042-B	Latest save date 2016-05-03	Format A3	Scale 2:1
Title RS PE SEALS RS 25-31 PE Restricted due to			Sheet no S1005806	Projection method D
Information drawing			Rev D	