

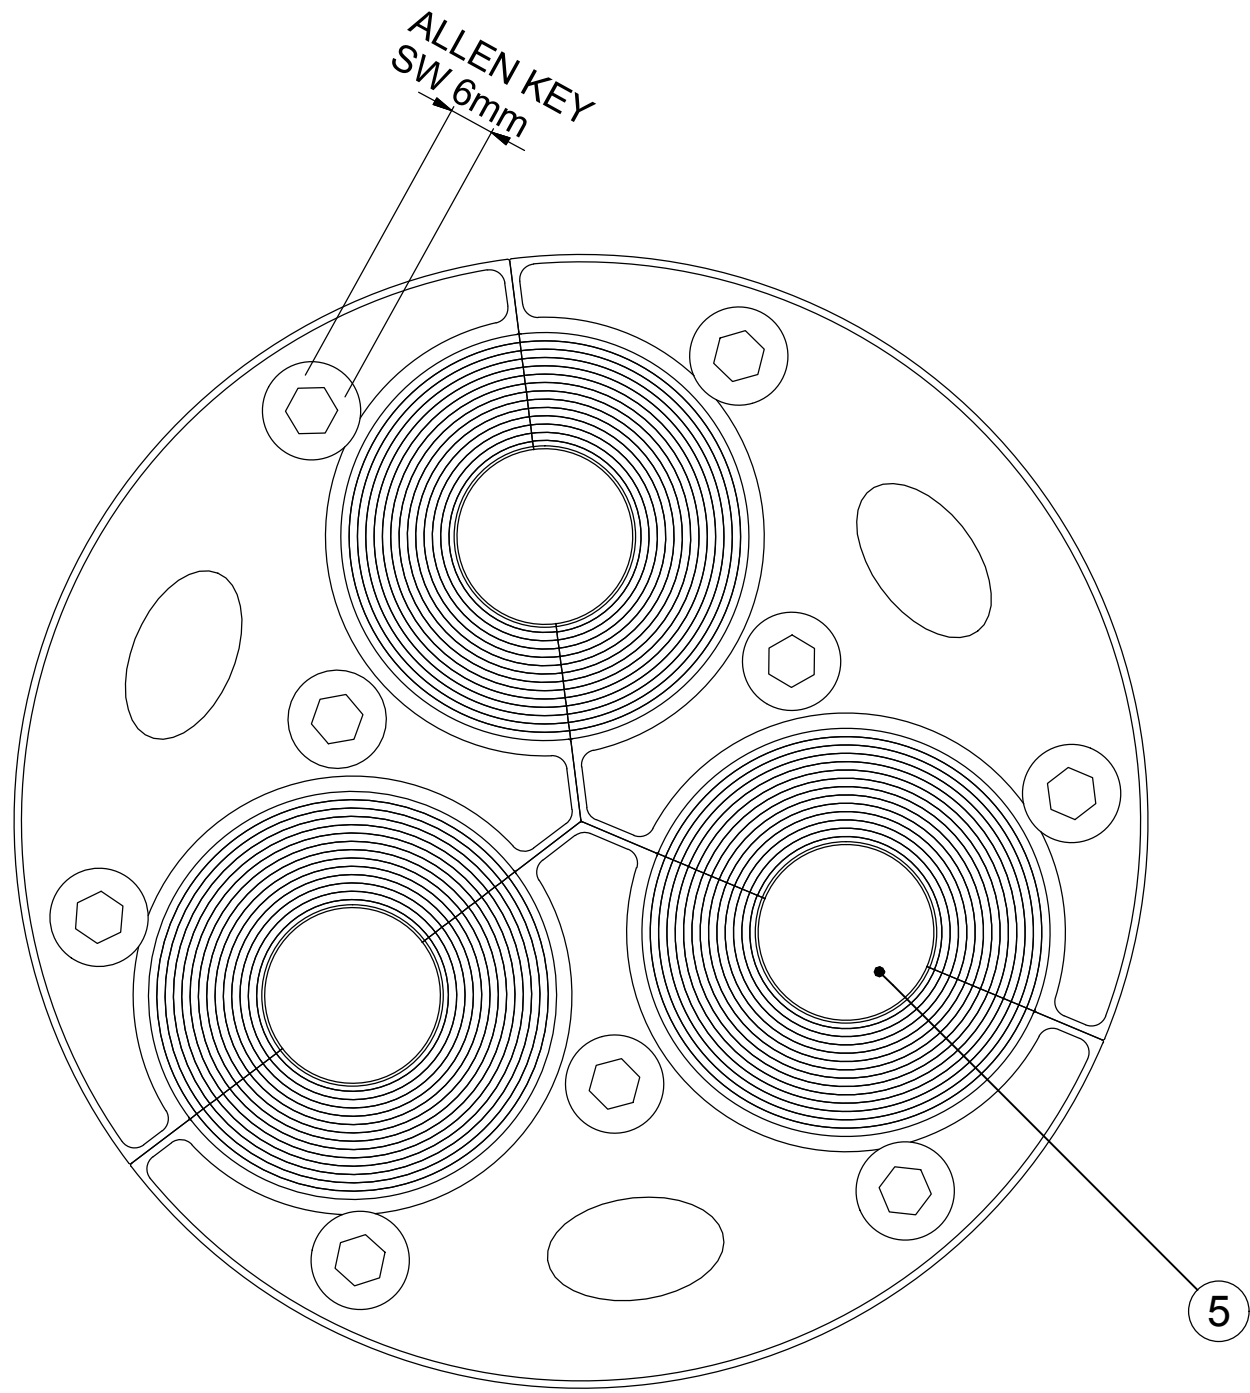
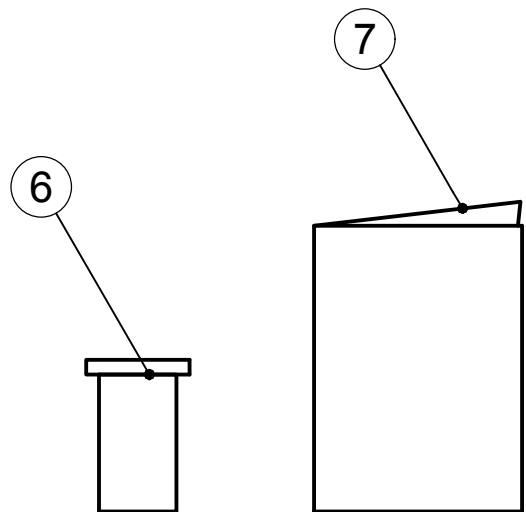


将克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden

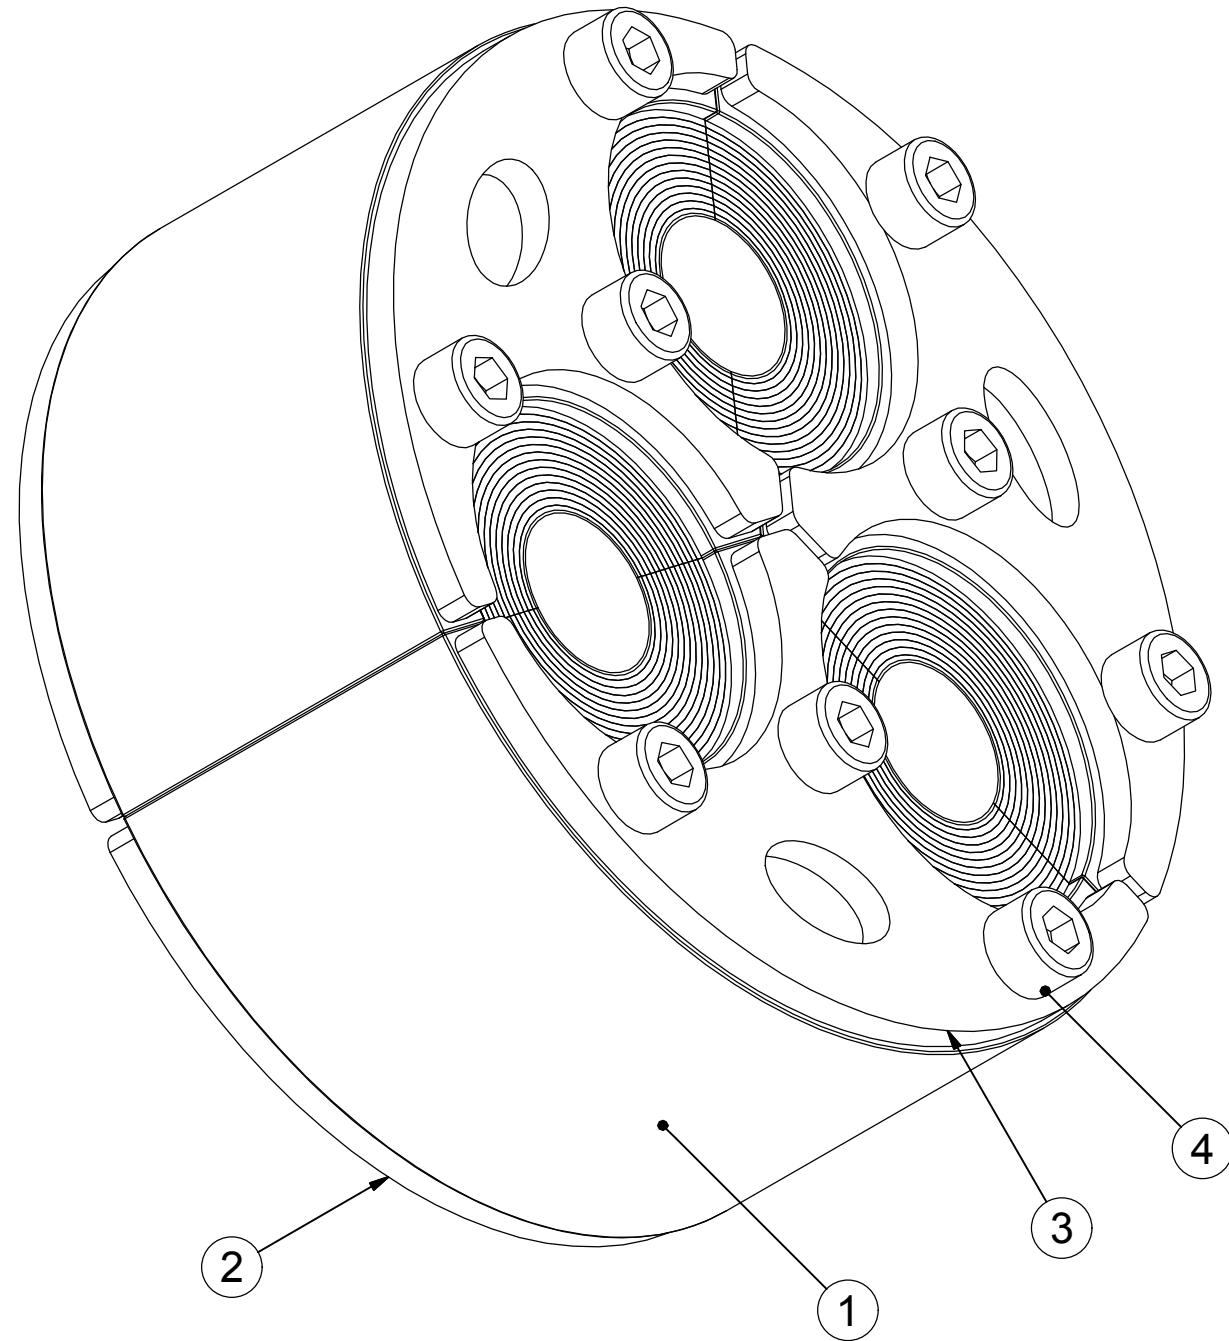

NOTE:
WOC VERSION IS WITHOUT
CENTER CORES

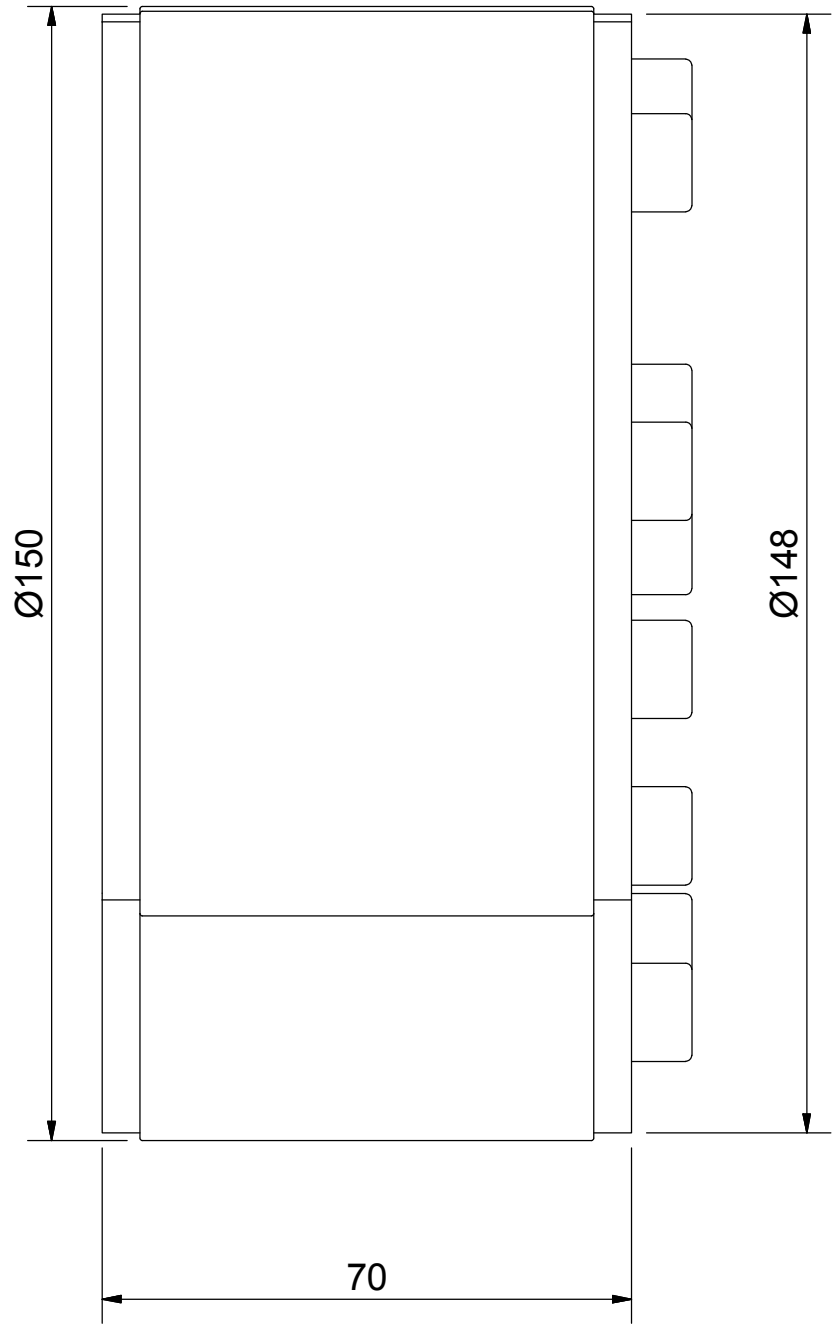

7	1	INSTALLATION INSTRUCTION			
6	1	LUBRICANT	10 ml		
5	3	CORE			
4	9	SCREW	MC6S M8x70 A4		
3	3	FRONT FITTING	T=5mm ACID PROOF STAINLESS STEEL		
2	3	REAR FITTING	T=5mm ACID PROOF STAINLESS STEEL		
1	3	RUBBER FRAME	ROXYLON		
ITEM QTY		Designation		Specification	Weight
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B		General surface roughness: Ra 12.5	
Designed by/date se-jenboh 2015-10-29		Approved by/date		Format A2	Scale 1:-
Title H3 150 UG INSERTABLE ASSEMBLY		Restricted due to Information drawing		Drawing number S1507677	Rev A
Projection method First angle		TotWeight			

A		2015-10-29	se-jenboh
Rev	Type of revision	Date	Sign