



We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ©ROXTEC INTERNATIONAL AB

TYPE	W (MM)	H (MM)	Ømin. (MM)	Ømax. (MM)
RM 15 PE B	15	15	3	11
RM 15w40 PE B	15	40	3.5	10.5
RM 20 PE B	20	20	4	14.5
RM 20w40 PE B	20	40	3.5	16.5
RM 30 PE B	30	30	10	25
RM 40 PE B	40	40	21.5	34.5
RM 40 10-32 PE B	40	40	9.5	32.5
RM 60 PE B	60	60	28	54
RM 60 24-54 PE B	60	60	24	54
RM 90 PE B	90	90	48	71
RM 120 PE B	120	120	67.5	99
30H90	30	90	10	25




RM PE B (SIZE 15-120)
RM 40 10-32 PE B
RM 60 24-54 PE B
30H90

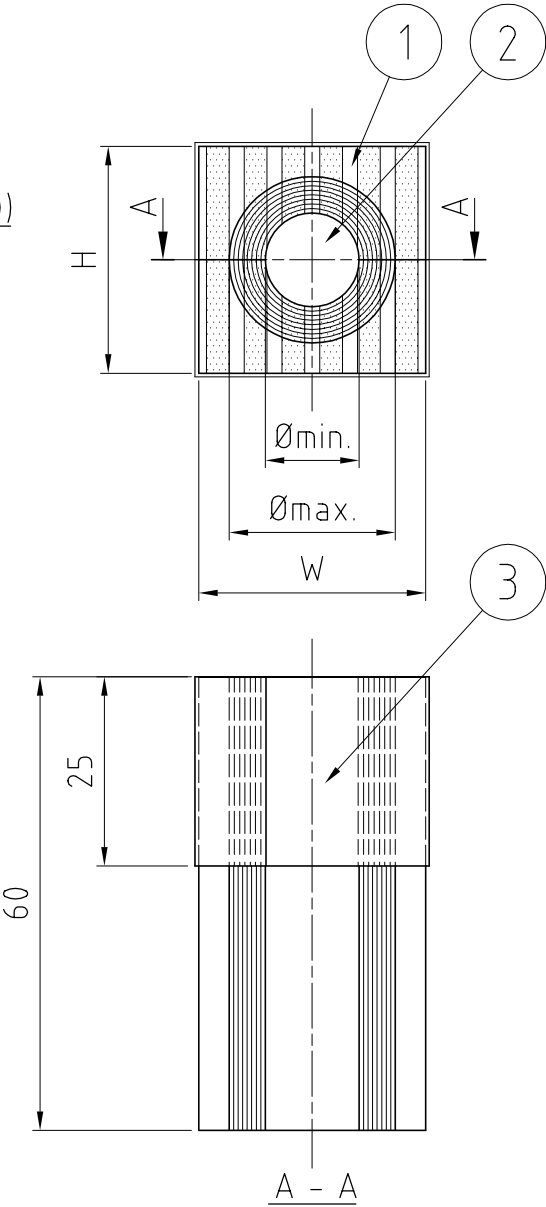


RM 20w40 PE B
2 CABLES/MODULE

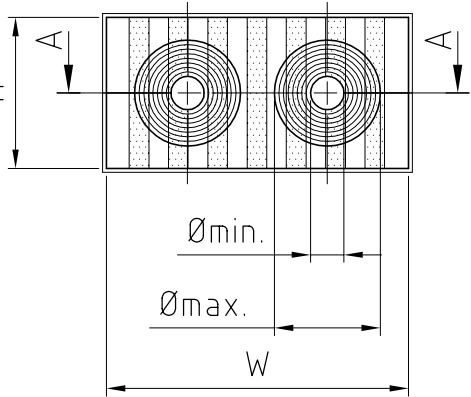

RM 15w40 PE B
3 CABLES/MODULE

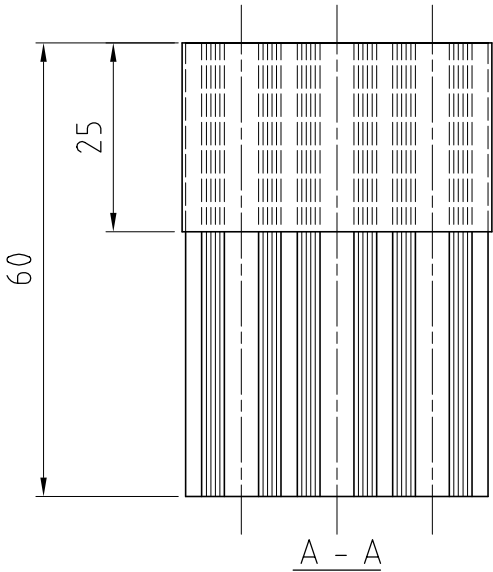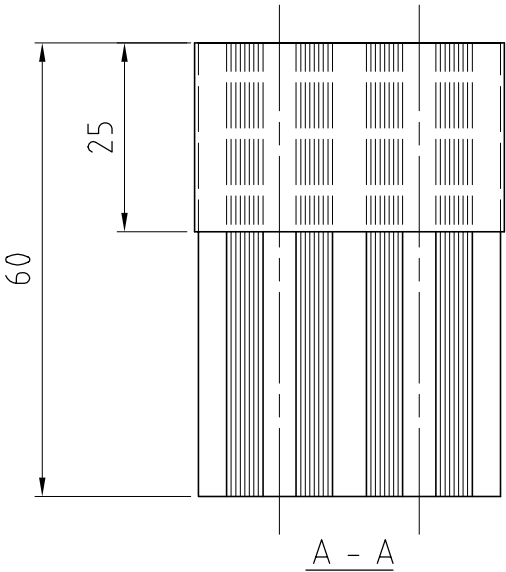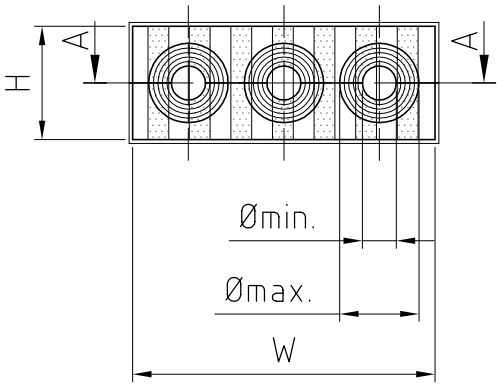

NOTE: 60, 90 AND 120 MODULES AVAILABLE WOC (WOTHOUT CORE).



-	-	2007-04-25	
Rev	Type of revision	Date	Sign

3	-	CONDUCTIVE TAPE	-	-
2	-	CORE	ROXYLON	-
1	-	RUBBER	ROXYLON	-
Item	Qty	Designation	Specification	NetWeight
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012		Designed by M PRZYBYLA Checked by J AKESSON Approved by J AKESSON	Date 2009-03-10 Format A3 Scale 1:1	General tolerance DIN ISO 2768-1/2-m/K DIN ISO 13920-BF Welded details EN ISO 5817-B EN ISO 10042-B General surface roughness, Ra 12,5
Roxtec		Title RM PE B EX MODULES ASSEMBLY		Projection method Rev
Restricted due to INFORMATION DRAWING		Drawing number S1016606		-