
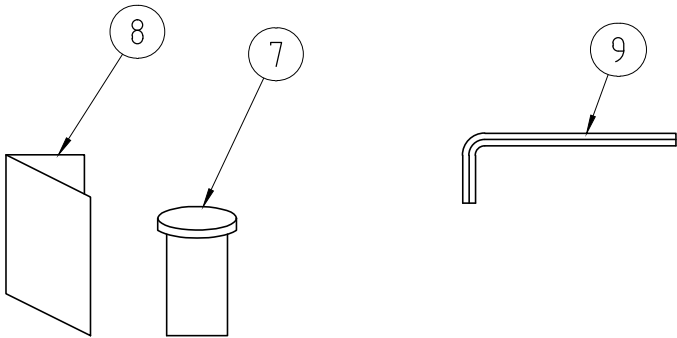
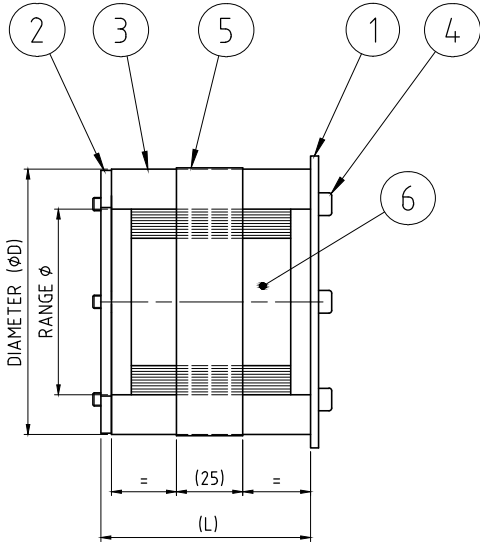


RS PE SEALS								RS PE WOC SEALS (WITHOUT CORE)							
SIZE	A	B	C	D	E	RANGE ϕ	L	SIZE	A	B	C	D	E	RANGE ϕ	L
RS 75 PE	85	4	6	75	1	0+24-54	77	RS 75 PE WOC	85	4	6	75	0	24-54	77
RS 100 PE	100	4	6	100	1	0+48-70	77	RS 100 PE WOC	100	4	6	100	0	48-70	77
RS 125 PE	125	5	6	125	1	0+66-98	79	RS 125 PE WOC	125	5	6	125	0	66-98	79
								RS 150 PE WOC	150	5	8	150	0	93-119	79

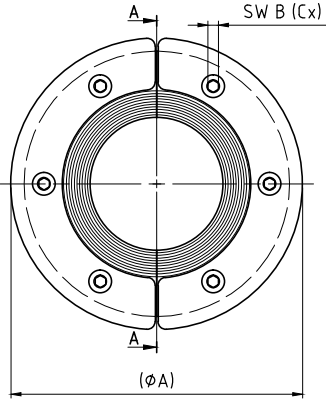

NOTE:
The range of the Roxtec Seal indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable mantle.

9	1	ALLEN KEY														
8	1	INSTALLATION INSTRUCTION														
7	1	ROXTEC LUBRICANT		10 ML												
6	E	CORE		ROXYLON												
5	2	CONDUCTIVE TAPE		TINPLATED COPPER												
4	C	SCREW		MC6S A4												
3	2	RUBBER FRAME		ROXYLON												
2	2	REAR FITTING		ACID PROOF STAINLESS STEEL												
1	2	FRONT FITTING		ACID PROOF STAINLESS STEEL												
Item	Qty	Designation			Specification									Net Weight		
General tolerance ISO 2768-1/2-m/K EN ISO 1920-BF		Welded details EN ISO 5817-B EN ISO 10042-B		Designed by tc_service		Created Date 2004-01-13		Latest save date 2016-05-03		Format A3	Scale 1:2	Sheet no		Tot Weight -		
 Roxtec www.roxtec.com				Title RS PE SEALS RS 75-150 PE										 Projection method		
				Restricted due to Information drawing					Drawing number S1005805							Rev C

C	ALLEN KEY ADDED.	2016-05-03	se-jenboh
Rev	Type of revision	Date	Sign