
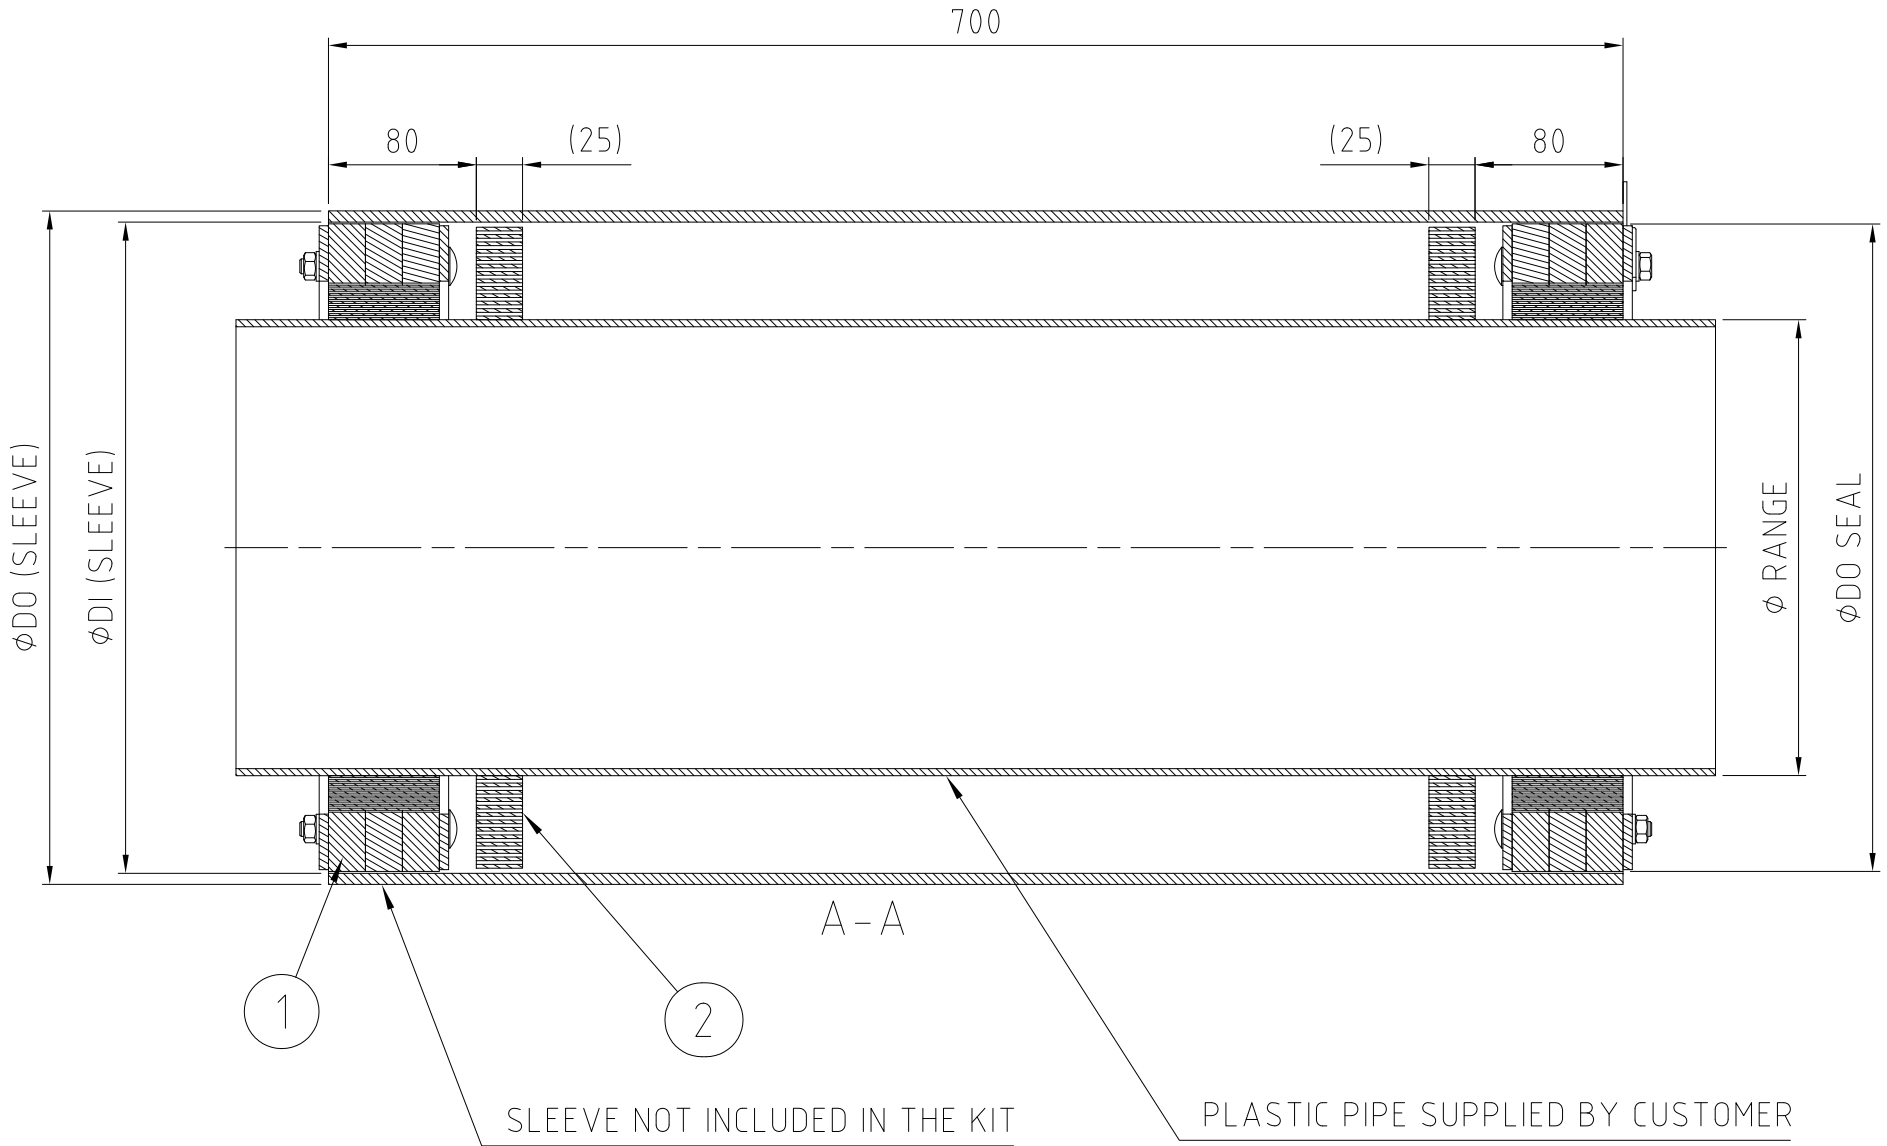
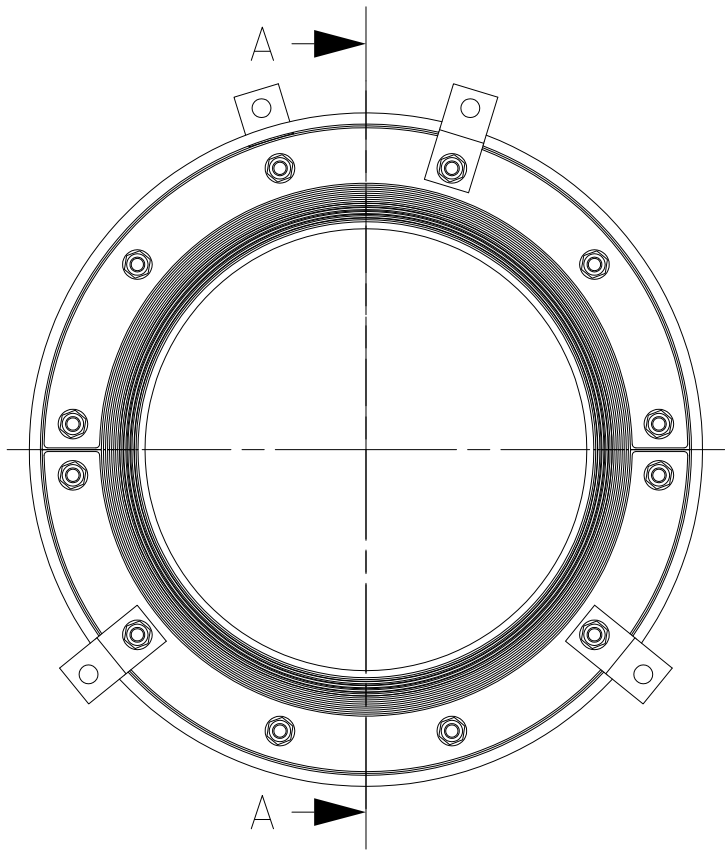


格克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

RS PPS/F+WT SEAL				
SEAL	Ø RANGE (mm)	DO SEAL (mm)	DI SLEEVE (mm)	DO SLEEVE (mm)
RS PPS/F+WT 225	151-181	225	227	239
RS PPS/F+WT 250	176-206	250	252	264
RS PPS/F+WT 300	206-236	300	302	314
RS PPS/F+WT 350	244-286	350	365	364
RS PPS/F+WT 400	294-336	400	402	414



2	2	INTUMESCENT MATERIAL		25x2				
1	2	RS SEAL 225-400 AISI316 WOC						
Item	Qty	Designation		Specification			NetWeight	
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012		Designed by se-ronpet		Created Date 2012-10-09	General tolerance ISO 2768-1/2-m/K EN ISO 13920-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5 —	TotWeight
		Approved by se-milkar		Approved Date 2012-10-09	Title RS PPS/F+WT			Projection method 
		Format A3	Scale 1:2		225-400 ASSEMBLY			
		Restricted due to			Drawing number			Rev
		Information Drawing			S1029488			A

A			
Rev	Type of revision	Date	Sign