
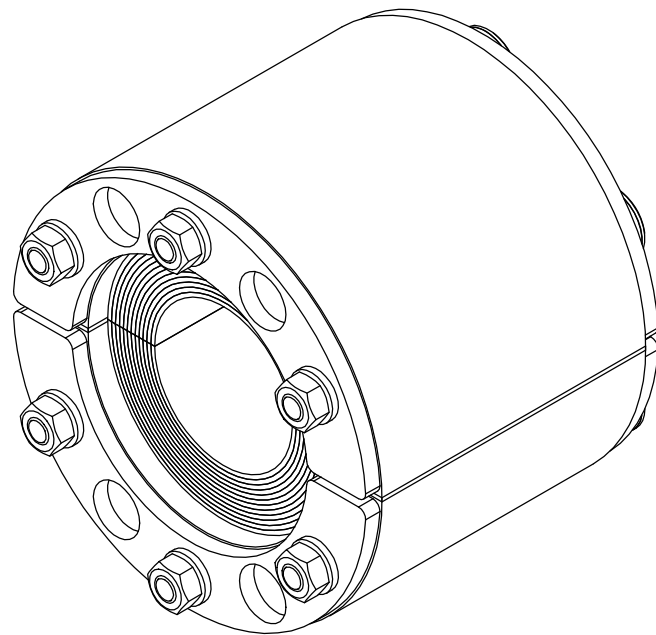
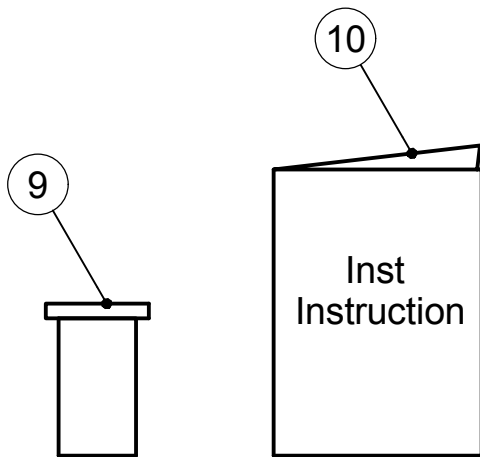
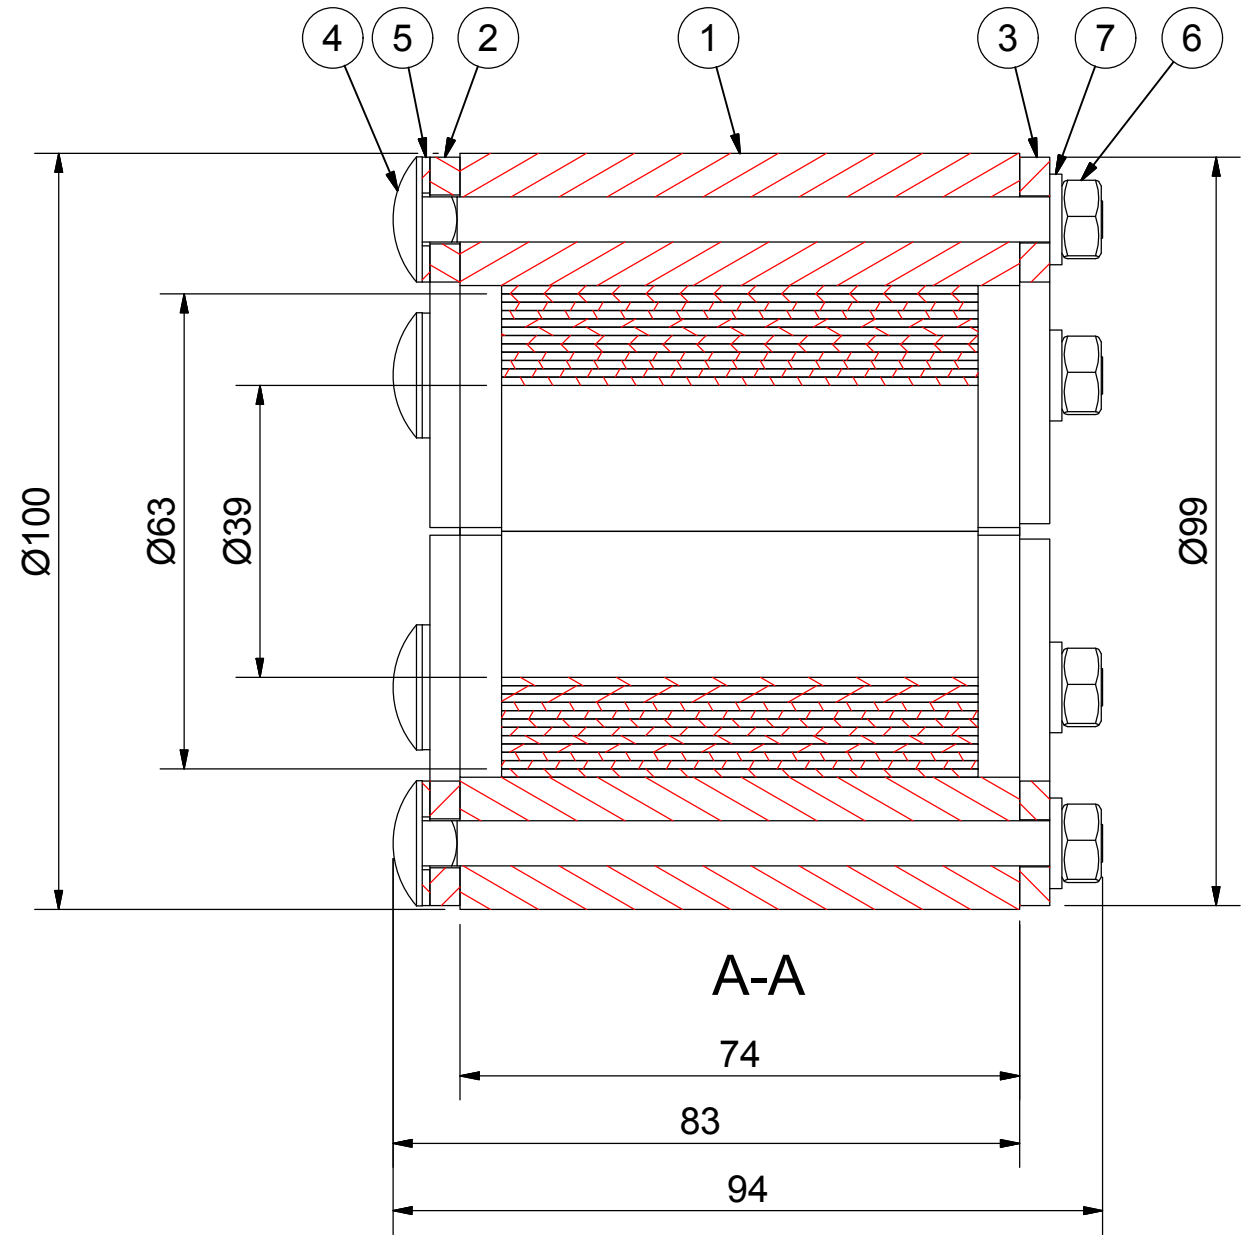


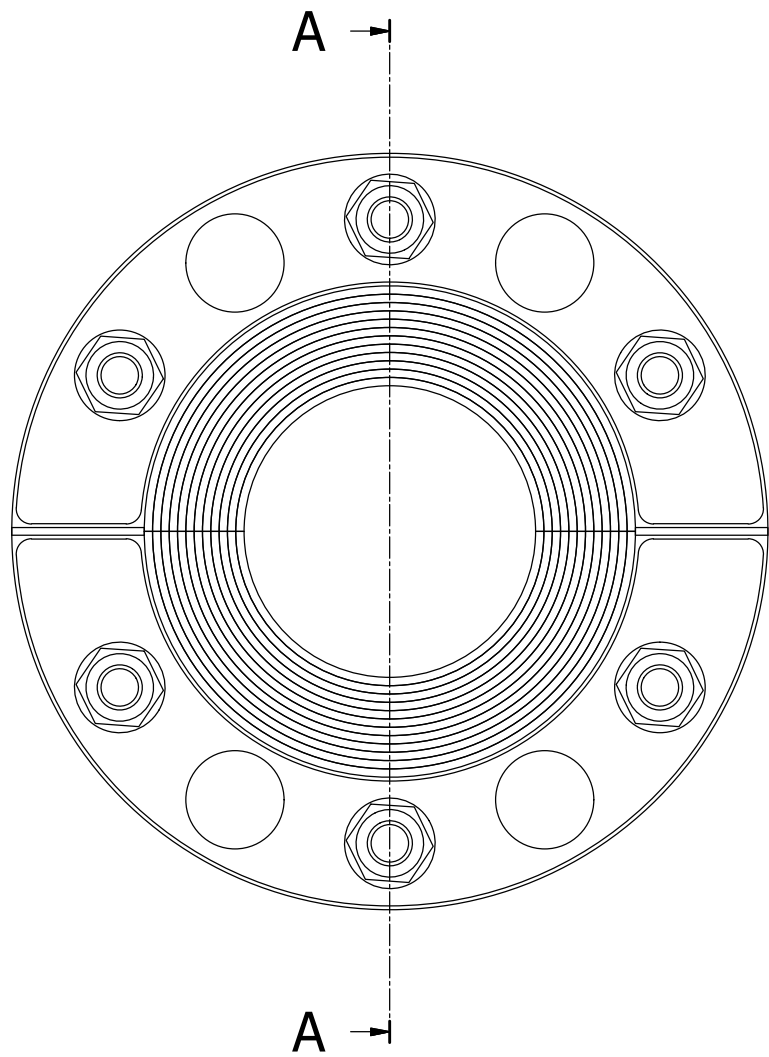

10	1	INSTALLATION INSTRUCTION		
9	1	LUBRICANT	10 ml	
7	6	WASHER	ISO 7089 M6 A4	
6	6	NUT	ISO 4032 M6 A4	
5	6	GASKET MVBF	M6, EPDM T=1	
4	6	SCREW	MVBF M6x90 DIN 603 A4	
3	2	FRONT FITTING	AISI 316, T=4 mm	
2	2	REAR FITTING	AISI 316, T=4 mm	
1	2	RUBBER FRAME	HE-EPDM	

ITEM	QTY	Designation	Specification	Weight
General tolerance: ISO 2768-1/2-m/K EN ISO 13920-BF		Welded details: EN ISO 5817-B EN ISO 10042-B	General surface roughness: Ra 12.5	Designed by/date se-ronpet 2016-04-18
				Latest save date 2016-04-18
				Format A3
				Scale
				Sheet no 1 / 1
				TotWeight 0,8 kg
				Projection method
				Rev A

A		2016-04-18	se-ronpet
Rev	Type of revision	Date	Sign

**Roxtec**
www.roxtec.com

Title
RS UG SEALING
RS 100 UG INSERTABLE WOC
Restricted due to
Information drawing

Drawing number
S1511757