
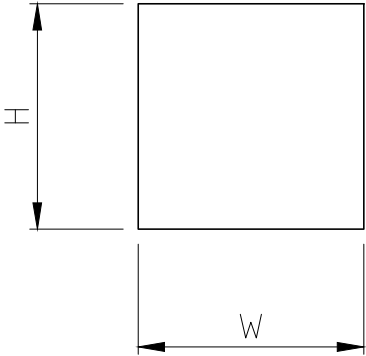


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ©ROXTEC INTERNATIONAL AB

TYPE	W (mm)	H (mm)	L (mm)
RM 5w40/0	40	5	60
RM 5w60/0	60	5	60
RM 5w120/0	121	5	60
RM 10w40/0	40	10	60
RM 10w60/0	60	10	60
RM 10w120/0	121	10	60
RM 11W66/0	66	11	60
RM 15/0	15	15	60
RM 20/0	20	20	60
RM 30/0	30	30	60
RM 40/0	40	40	60
RM 60/0	60	60	60
RM 90/0	90	90	60
RM 120/0	120	120	60
RM 30H90/0	30	90	60
RM 40H80/0	40	80	60



E	RM 40H80/0 AND 11w66/0 ADDED	2017-01-20	se-mikgru
Rev	Type of revision	Date	Sign

1	1	RUBBER		ROXYLON				—		
Item	Qty	Designation		Specification				Net Weight		
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012		Designed by	se-stemil	Date	1999-02-25	General tolerance DIN ISO 2768-1/2-m/K DIN ISO 13920-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Tot Weight	
		Checked by		Format	A3	Title RM MODULES SOLID MODULES				Projection method 
		Approved by	se-jenboh	Scale	1:1					Rev
		Restricted due to			Drawing number					
		Information drawing			S1000682					