


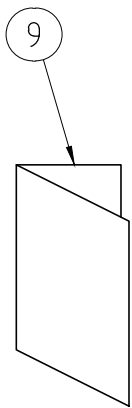


烙克塞克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

RS ES SEALS

SIZE	A	B	D	E	F	RANGE ϕ	L
RS 25 ES	32	15	25	2,5	1	0+3.6-12	41,5
RS 31 ES	37	15	31	2,5	1	0+4-17	41,5
RS 43 ES	53	25	43	4	1	0+4-23	80
RS 50 ES	60	25	50	4	1	0+8-30	80
RS 68 ES	78	25	68	4	1	0+26-48	80

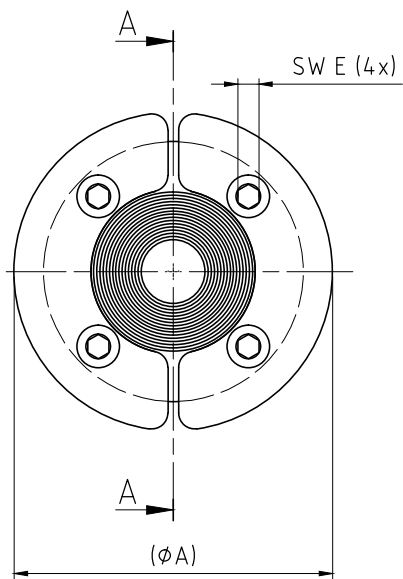


NOTE:

The range of the Roxtec Seal indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable mantle.

G	ALLEN KEY ADDED.	2016-05-03	se-jenboh
Rev	Type of revision	Date	Sign

RS ES SEALS (WITHOUT CORE)

SIZE	A	B	D	E	F	RANGE ϕ	L
RS 68 ES WOC	78	25	68	4	0	26-48	80

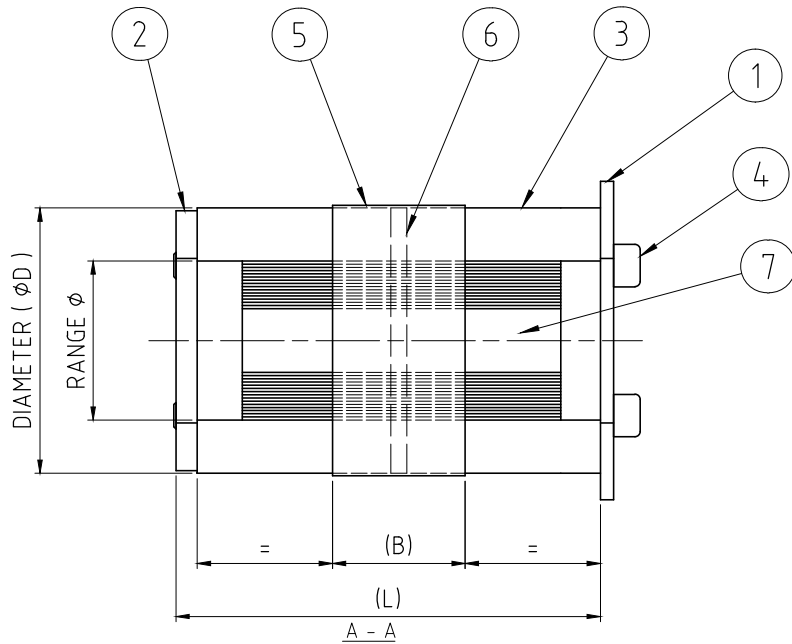

10	1	ALLEN KEY							
9	1	INSTALLATION INSTRUCTION							
8	1	ROXTEC LUBRICANT	10 ML						
7	F	CORE	ROXYLON						
6	2	CONDUCTIVE RUBBER	EMI SHIELD						
5	2	CONDUCTIVE TAPE	TIN PLATED COPPER						
4	4	SCREW	MC6S A4						
3	2	RUBBER FRAME	ROXYLON						
2	2	REAR FITTING	ACID PROOF STAINLESS STEEL						
1	2	FRONT FITTING	ACID PROOF STAINLESS STEEL						
Item	Qty	Designation	Specification	Net Weight					
General Tolerance ISO 2768-1/2-m/K	Welded details EN ISO 5817-B	General surface roughness, Ra 12,5	Designed by se-tomagr	Created Date 1999-02-16	Latest save date 2016-05-03	Format A3	Scale 1:1	Sheet no	TotWeight -
Title RS ES SEALS RS 25-68 ES Restricted due to									Projection method
Information drawing							Drawing number S1000676	Rev G	

