
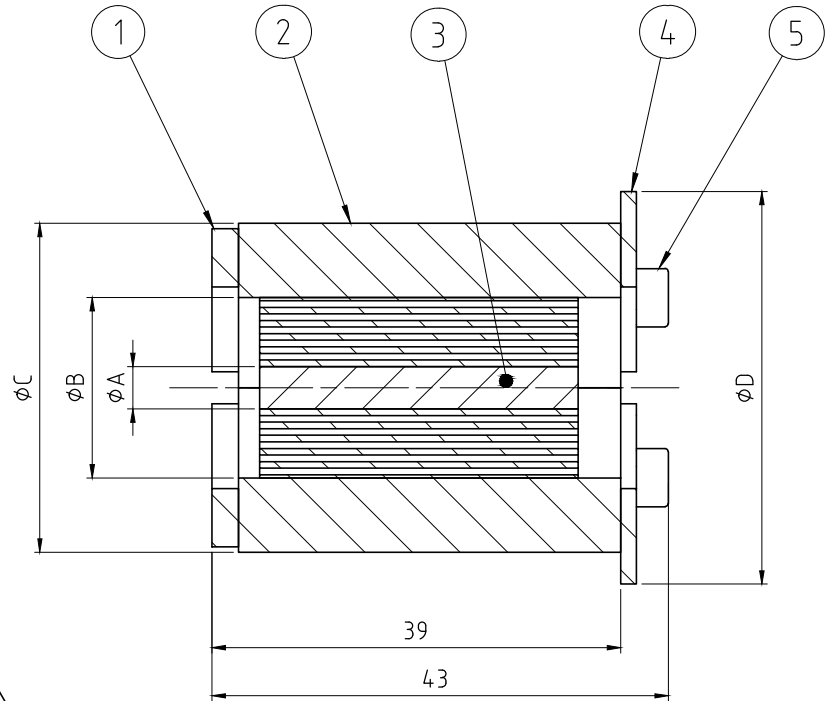






烙克塞克保留所有权利。未经授权严禁复制，
使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use
or disclosure to third parties is strictly forbidden.

TYPE	A	B	C	D
RS 25	3.6	12	25	32
RS 31	4	17	31	37

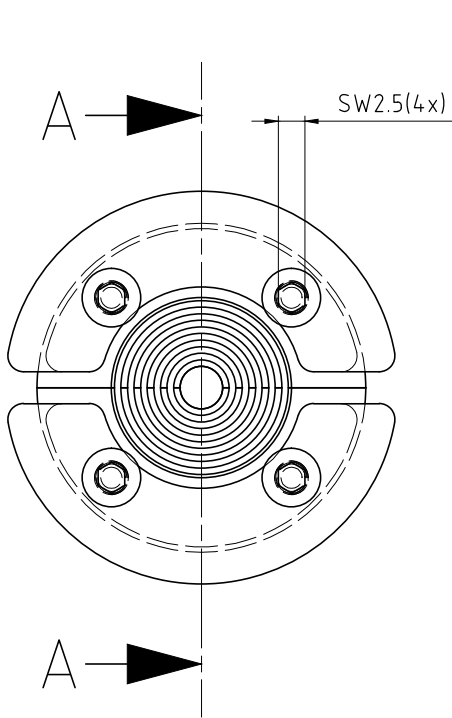

A-A

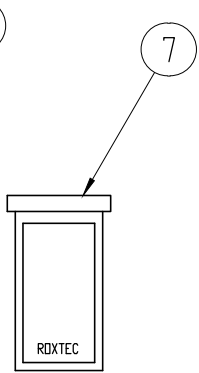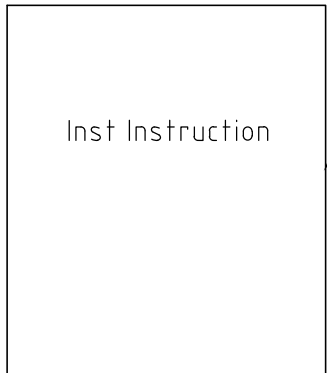

8	1	ALLEN KEY		-
7	1	LUBRICANT	10 ml	-
6	1	INSTALLATION INSTRUCTION	-	-
5	4	SCREW	DIN 912 MC6S A4	-
4	2	FRONT FITTING	ACID PROOF STAINLESS STEEL	-
3	1	CORE	ROXYLON	-
2	2	RUBBER FRAME	ROXYLON	-
1	2	REAR FITTING	ACID PROOF STAINLESS STEEL	-

Item	Qty	Designation	Specification						Net Weight			
General tolerance EN ISO 2768-1/2-m/K EN ISO 1920-B		Welded details EN ISO 5817-B EN ISO 10042-B		General surface roughness, Ra 12.5		Designed by tc_service	Created Date 2003-10-30	Latest save date 2016-04-29	Format	Scale 2:1	Sheet no A3	Total Weight -
Roxtec www.roxtec.com												Projection method 
Title RS SEALS RS 25-31									Rev			
Restricted due to Information drawing									Drawing number S1005507		D	

D	ALLEN KEY ADDED.	2016-04-29	se-jenboh
Rev	Type of revision	Date	Sign