
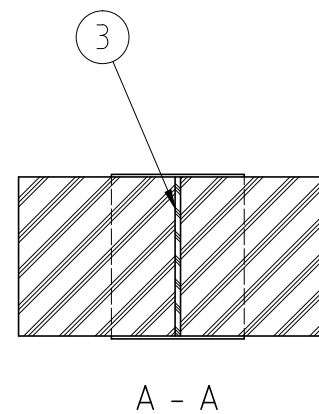
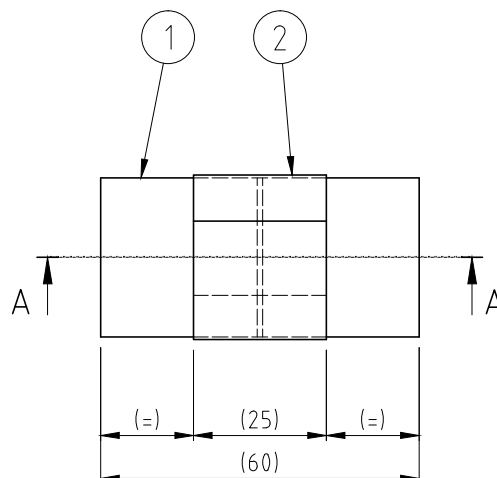


All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

TYPE	W (mm)	H (mm)
RM 5w40/0 ES	40	5
RM 5w60/0 ES	60	5
RM 5w120/0 ES	120	5
RM 10w40/0 ES	40	10
RM 10w60/0 ES	60	10
RM 10w120/0 ES	120	10
RM 10/0 ES	10	10
RM 15/0 ES	15	15
RM 20/0 ES	20	20
RM 30/0 ES	30	30
RM 30H90/0 ES	30	90
RM 40/0 ES	40	40
RM 40H80/0 ES	40	80
RM 60/0 ES	60	60
RM 90/0 ES	90	90
RM 120/0 ES	120	120



D	60 WAS 40, ITEM 4 REMOVED	2017-03-09	xx-emikul
Rev	Type of revision	Date	Sign

3	-	CONDUCTIVE RUBBER									-	
2	-	CONDUCTIVE TAPE									-	
1	-	RUBBER			ROXYLON						-	
Item	Qty	Designation			Specification						NetWeight	
General tolerance ISO 2768-1/2-M/K EN ISO 1920-BF		Welded details EN ISO 5817-B EN ISO 10042-B		General surface roughness, Ra 12,5		Designed by se-stemil	Created Date 1999-03-04	Latest save date 2017-03-13	Format A3	Scale 1:1	Sheet no	TotWeight -
 Roxtec www.roxtec.com		Title RM ES MODULES EMC SOLID MODULES										Projection method 
		Restricted due to Information drawing							Drawing number S1000698		Rev D	