
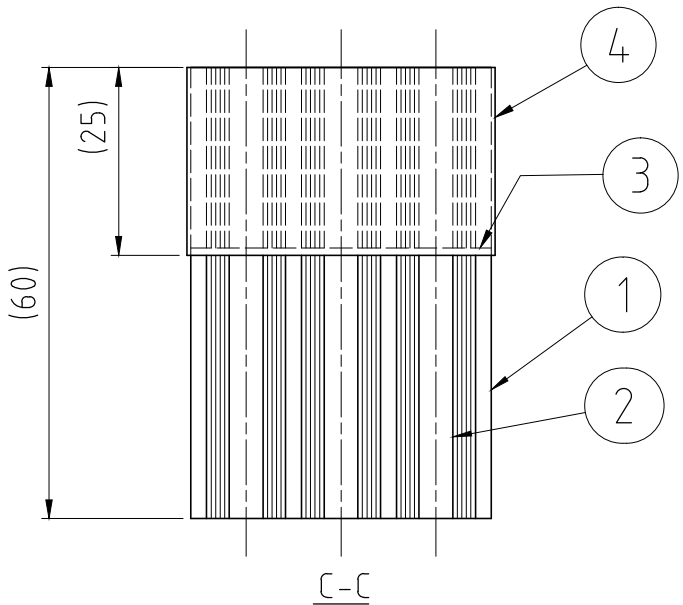
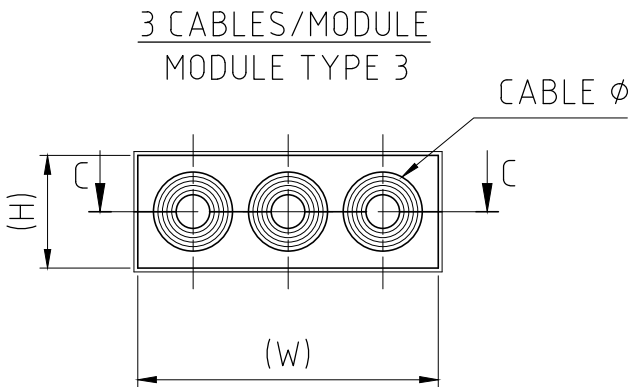
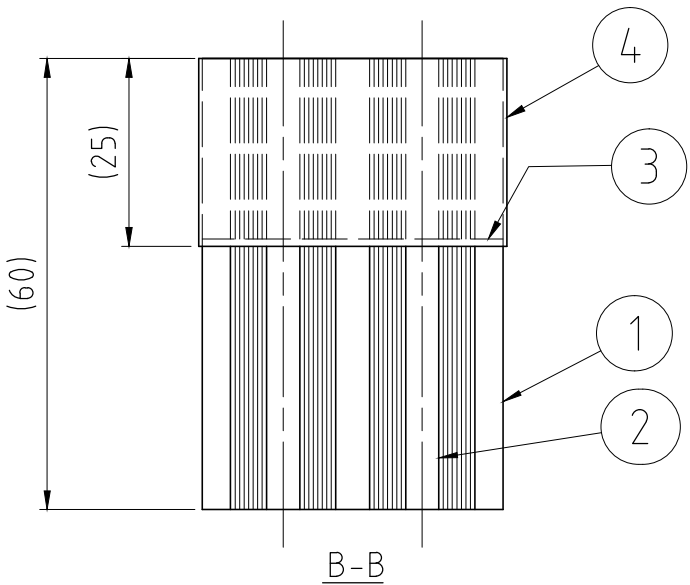
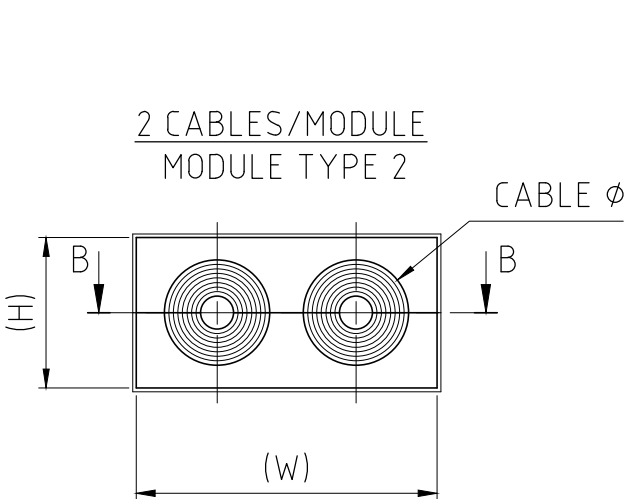
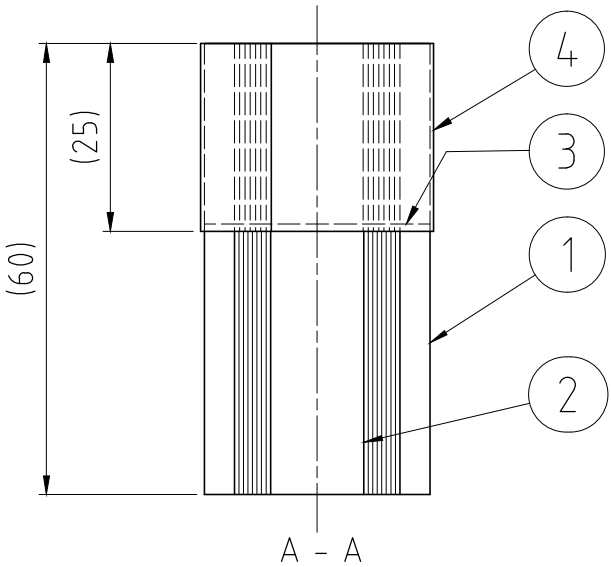


TYPE	W (mm)	H (mm)	CABLE Ø (mm)	MODULE TYPE
RM 15 ES B	15	15	0+3 - 11	1
RM 15w40 ES B	40	15	0+3.5 - 10.5	3
RM 20 ES B	20	20	0+4 - 14.5	1
RM 20w40 ES B	40	20	0+3.5 - 16.5	2
RM 30 ES B	30	30	0+10 - 25	1
RM 30H90 ES B	30	90	0+10 - 25	1
RM 40 ES B	40	40	0+21.5 - 34.5	1
RM 40H80 ES B	40	80	0+21.5 - 34.5	1
RM 40 10-32 ES B	40	40	0+9.5 - 32.5	1
RM 60 ES B	60	60	0+28 - 54	1
RM 60 24-54 ES B	60	60	0+24 - 54	1
RM 60 ES B WOC	60	60	28 - 54	1
RM 80 ES B WOC	80	80	48 - 71	1
RM 90 ES B WOC	90	90	48 - 71	1
RM 120 ES B WOC	120	120	67.5 - 99	1

NOTE:
 WOC = WITHOUT CENTER CORE

1 CABLE/MODULE
 MODULE TYPE 1

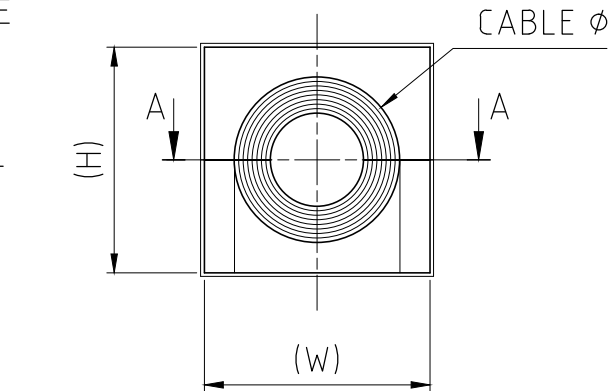

NOTE:
 Cable Ø of the Roxtec Module indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable mantle.

4	-	CONDUCTIVE TAPE	-	-					
3	-	CONDUCTIVE RUBBER	-	-					
2	-	CORE	ROXYLON	-					
1	-	RUBBER	ROXYLON	-					
Item	Qty	Designation	Specification				Net Weight		
General tolerance ISO 2768-1/2-m/K EN ISO 13920-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Designed by tc_service	Created Date 2003-12-17	Latest save date 2017-03-16	Format A3	Scale 1:1	Sheet no	TotWeight -
 Roxtec www.roxtec.com			Title RM ES B MODULES EMC ASSEMBLY						Projection method 
			Restricted due to Information drawing				Drawing number S1005749		

D	RM 40H80 ES B ADDED,W & H REVERSED	2016-12-20	xx-emikul
Rev	Type of revision	Date	Sign