
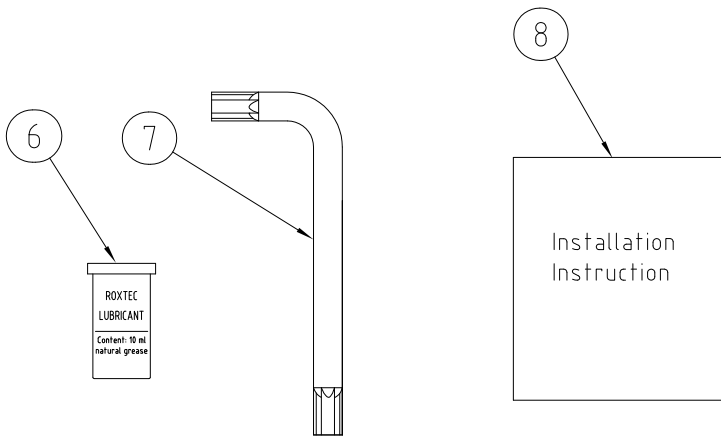
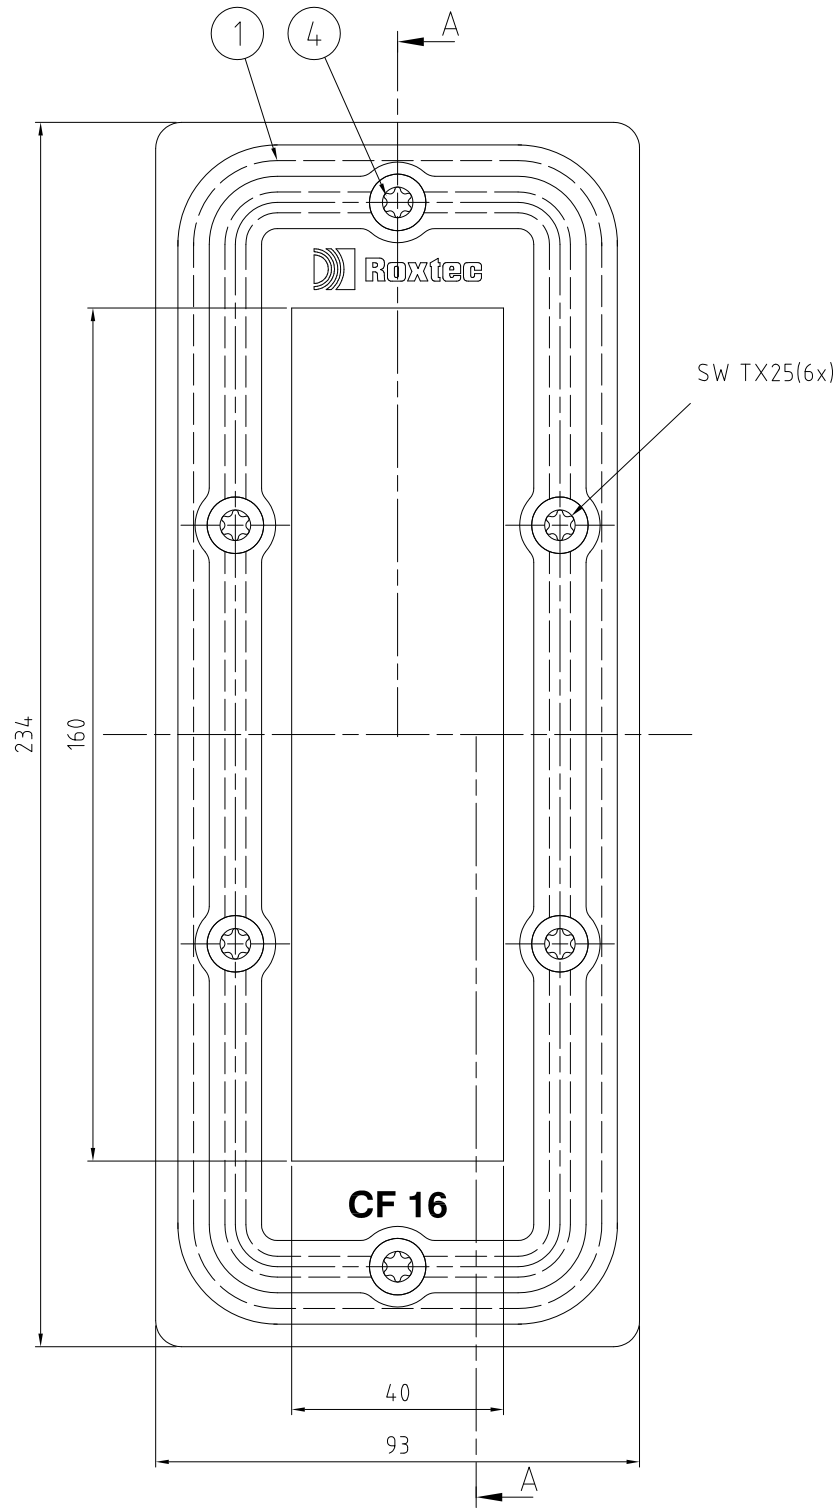
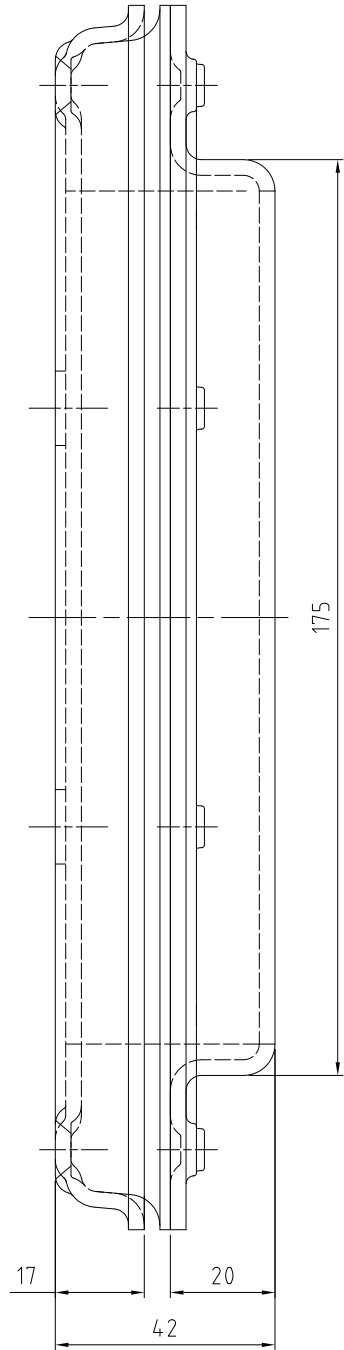
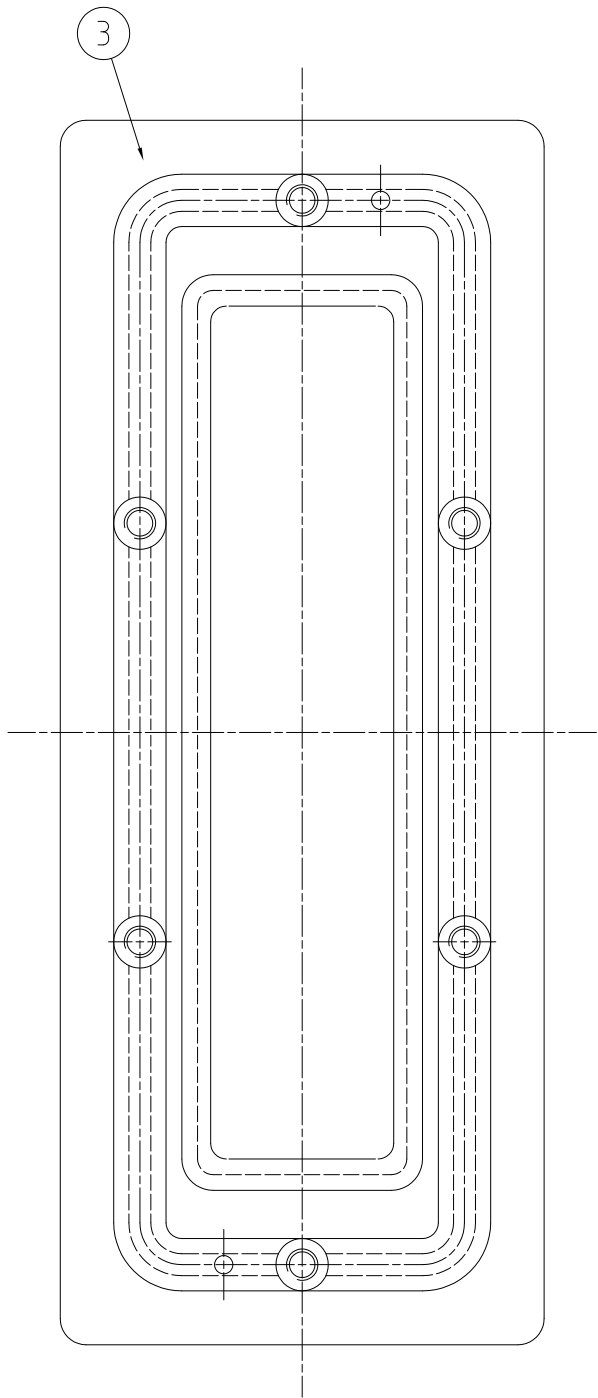


格克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

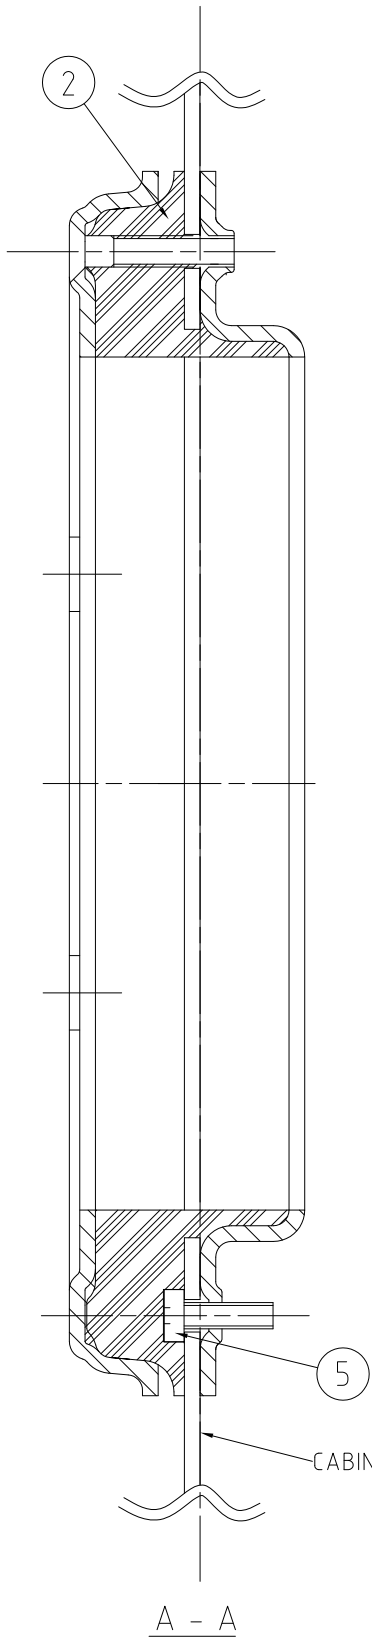

8	1	INSTALLATION INSTRUCTION		-
7	1	TORX WRENCH	TX 8.8 T30 FZB	-
6	1	LUBRICANT 10ML		-
5	2	SCREW	MRX-Z M5x20 4,8 A4	-
4	6	SCREW	MKFT 8.8 TX M6x35, A4	-
3	1	BACK PIECE		-
2	1	COMPRESSION RUBBER		-
1	1	TOP PIECE		-
Item	Qty	Designation	Specification	NetWeight
General tolerance ISO 2768-1/2-M/K	Welded details EN ISO 5817-B	General surface roughness, Ra 12,5	Designed by se-joahel	Created Date 2003-12-17
EN ISO 1925-BF			Approved by se-jorake	Approved Date 2014-02-14
			Format A2	Scale 1:1
			Title CF 16 ASSEMBLY	Projection method First Angle
			Restricted due to Information Drawing	Rev E
			Drawing number S1005735	

E	LUBRICANT, TORX WRENCH & INSTALL. INST. ADDED	2014-02-12	se-emikul
Rev	Type of revision	Date	Sign