
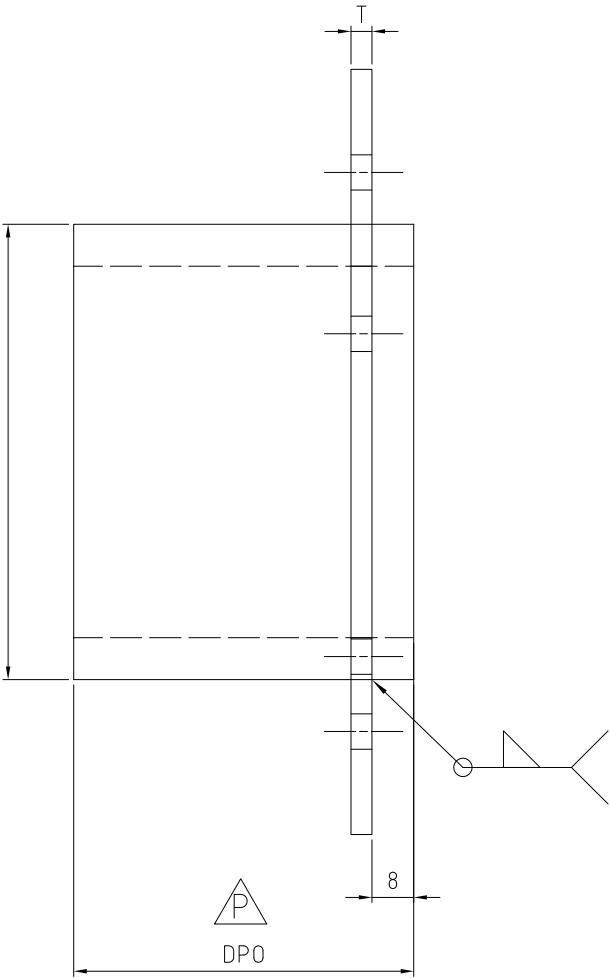


格克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

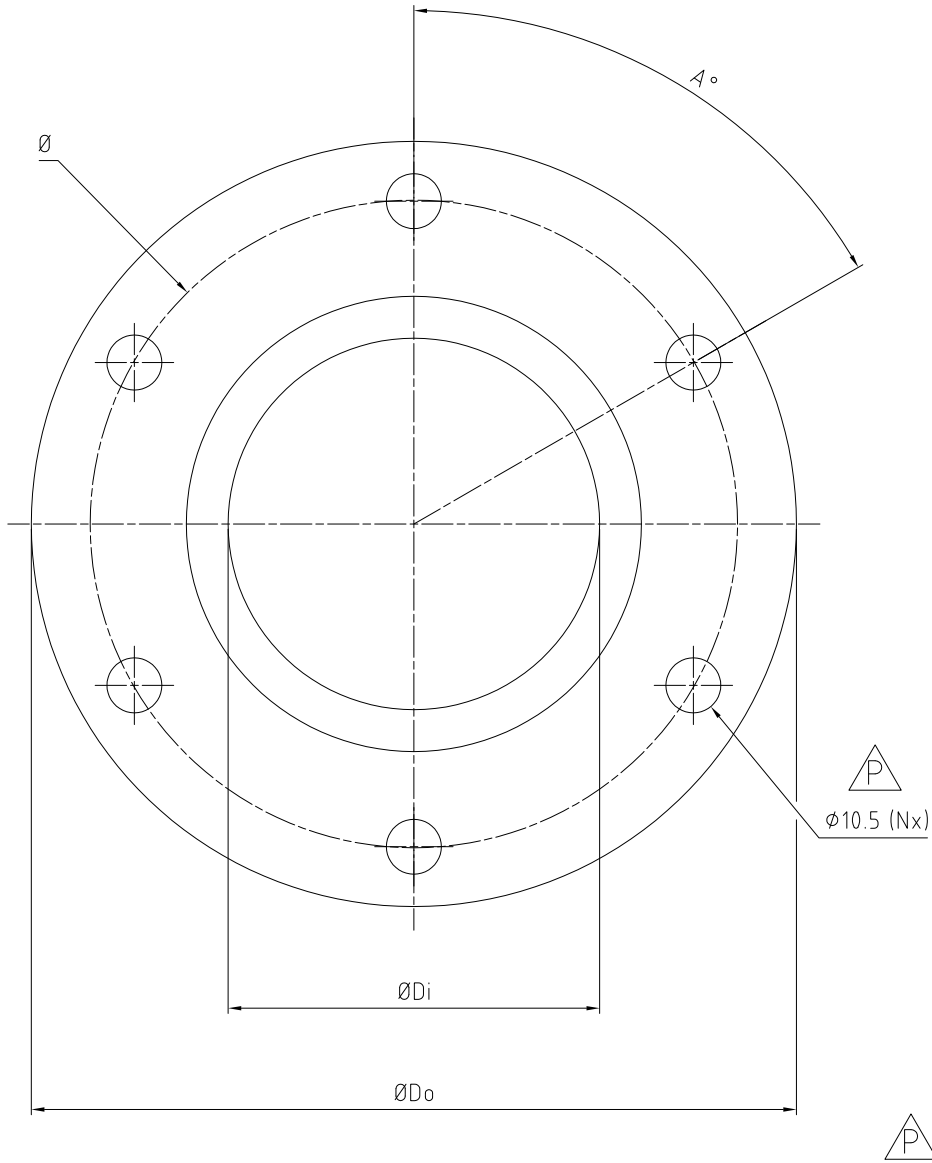

DPO = DIMENSION VIA PURCHASE ORDER
STANDARD DPO FOR SLFR/RS = SEE TABLE

TYPE	Di (MM)	Do (mm)	A°	Ø (mm)	N (X)	T (mm)	DPO (mm)	Dm (mm)
SLFRS 23	23,5	92	90	68	4	4	35	32
SLFRS 25	25,5	96	90	72	4	4	35	34
SLFRS 31	31,5	102	90	72	4	4	35	40
SLFRS 43	44	110	90	80	4	4	65	52
SLFRS 50	51	140	90	110	4	4	65	63
SLFRS 68	69,5	155	90	125	4	4	65	83
SLFRS 75	76,5	165	90	135	4	4	65	89
SLFRS 100	101	195	60	165	6	4	65	114
SLFRS 125	126	213	60	183	6	4	65	140
SLFRS 150	151	236	60	206	6	4	65	164
SLFRS 175	176	255	60	225	6	4	65	189
SLFRS 200	201	290	45	260	8	4	65	214
SLFRS 225	227	320	45	290	8	4	55	239
SLFRS 250	252	345	30	315	12	4	55	264
SLFRS 300	302	395	30	365	12	4	55	314
SLFRS 350	352	445	30	415	12	4	55	364
SLFRS 400	402	495	20	465	18	4	55	414
SLFRS 450	452	544	20	514	18	4	55	464
SLFRS 500	502	595	20	565	18	5	55	514
SLFRS 550	552	645	20	615	18	5	55	564
SLFRS 600	602	695	15	665	24	5	55	614
SLFRS 644	646	739	15	709	24	5	55	658

NOTE: ALUMINUM IS ONLY AVAILABLE IN SIZES UP TO SLFRS 300.

TYPE	Di (mm)	Do (mm)	A°	Ø mm	N (x)	T (mm)	DPO (mm)	Dm (mm)
SLFR 70	71,5	160	90	130	4	4	55	83
SLFR 75	76,5	165	90	135	4	4	55	89
SLFR 100	101	195	60	165	6	4	55	114
SLFR 125	126	213	60	183	6	4	55	140
SLFR 127	128	213	60	183	6	4	55	140
SLFR 150	151	236	60	206	6	4	55	164
SLFR 200	201	290	45	260	8	4	55	214

P	HOLE Ø10.5 WAS Ø9. MATERIAL NOTES REMOVED.	2014-10-24	se-almbah
Rev	Type of revision	Date	Sign

Item	Qty	Designation	Specification				Net Weight
General tolerance ISO 2768-MK EN ISO 1972-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Designed by se-jenboh	Created Date 2004-10-13	Approved by se-ronpet	Approved Date 2014-10-27	TotWeight
Title SLEEVE WITH FLANGE SLFR/RS 23-644			Format A2				Projection method 1:1
Restricted due to Information Drawing			Drawing number S1006852				Rev P