


We reserve all rights in this document and in the information contained therein. Reproduction, use or distribution of this document without the written consent of ROXTEC INTERNATIONAL AB is strictly forbidden.

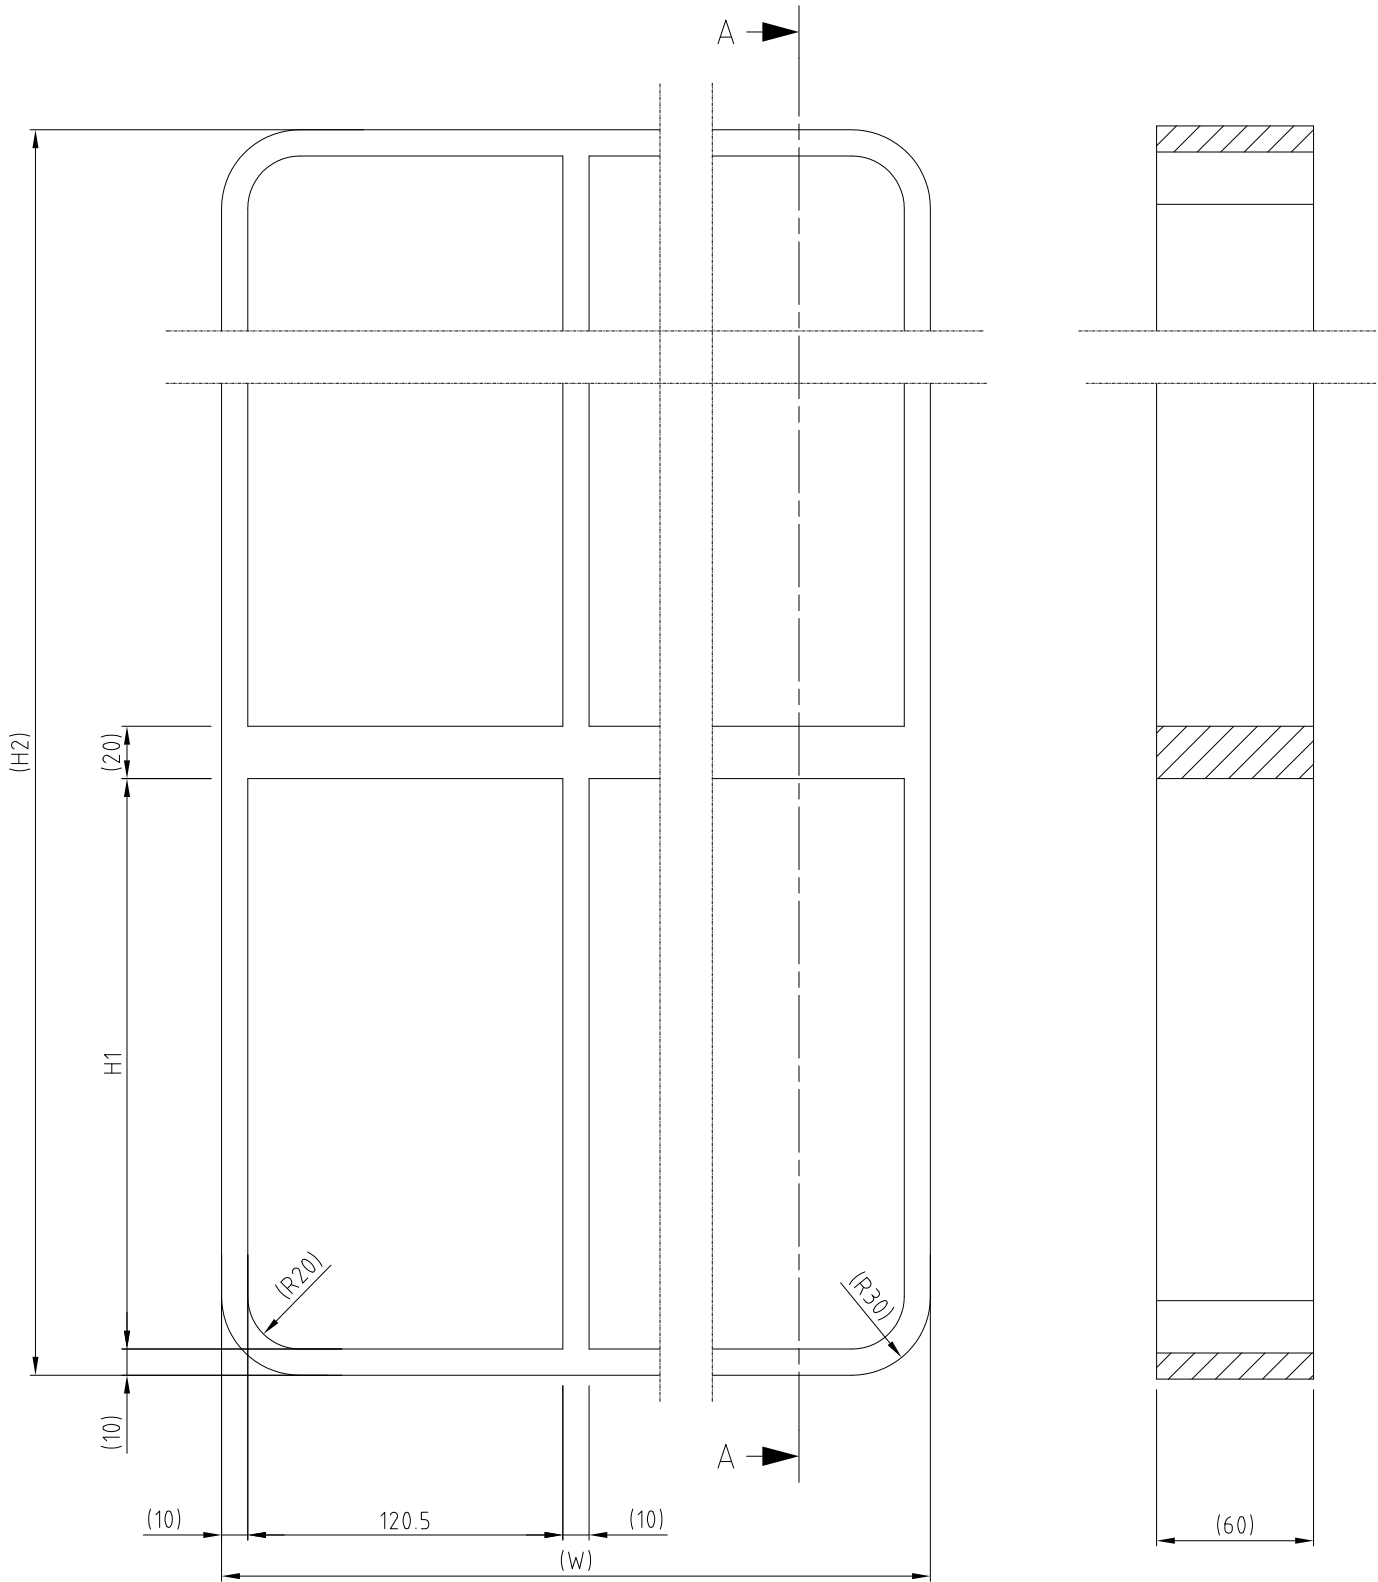

A - A

COMBINATION:

TYPE	H1 (mm)	H2 (mm)
SRC 2+2xN R20	101	242
SRC 4+4xN R20	159.5	359
SRC 6+6xN R20	218	476
SRC 8+8xN R20	278	596
SRC 2+2+2xN R20	101	363
SRC 4+4+4xN R20	159.5	538.5
SRC 6+6+6xN R20	218	714
SRC 8+8+8xN R20	278	894
SRC 2+2+2+2xN R20	101	484
SRC 4+4+4+4xN R20	159.5	718
SRC 6+6+6+6xN R20	218	952
SRC 8+8+8+8xN R20	278	1192

WIDTH:

COMB.	W (mm)
x2	271
x3	401.5
x4	532
x5	662.5
x6	793
x7	923.5
x8	1054
x9	1184.5
x10	1315

A	NEW LAYOUT/TITLE BLOCK/MORE COMB. ADDED	2007-01-03	se-ronpet
Rev	Type of revision	Date	Sign

Item	Qty	Designation	Specification				Net Weight	
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012	Designed by	se-joahel	Date	2003-11-03	General tolerance EN ISO 2768-1/2-M/K EN ISO 19720-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12.5	TotWeight
	Checked by		Format	A2	Title SRC FRAME + COMBINATION FRAME R20		Projection method	
	Approved by	se-stemil	Scale	1:2			Rev	
	Restricted due to		Information Drawing		Drawing number S1005537		A	

