
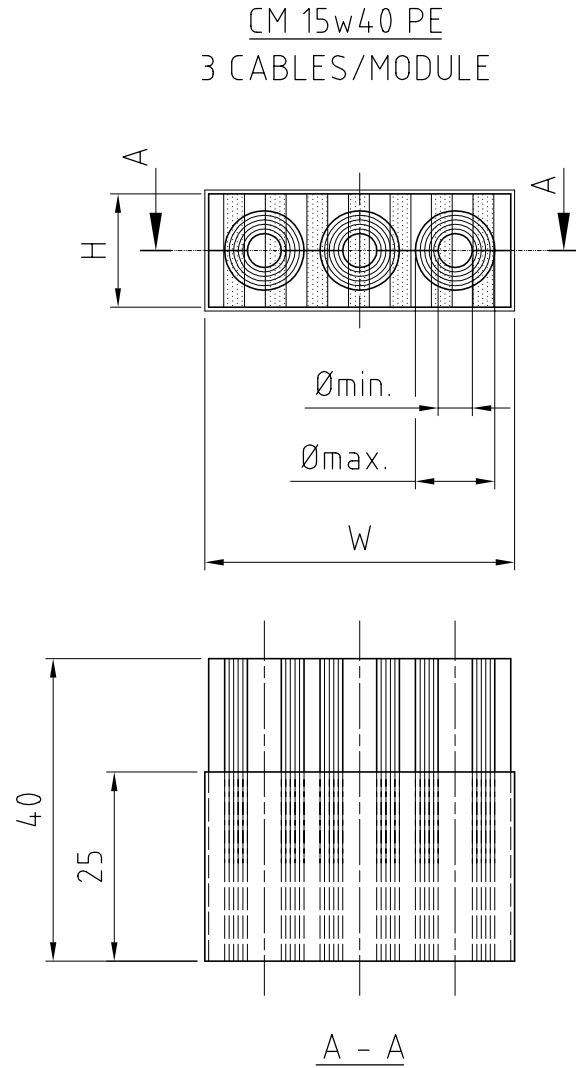
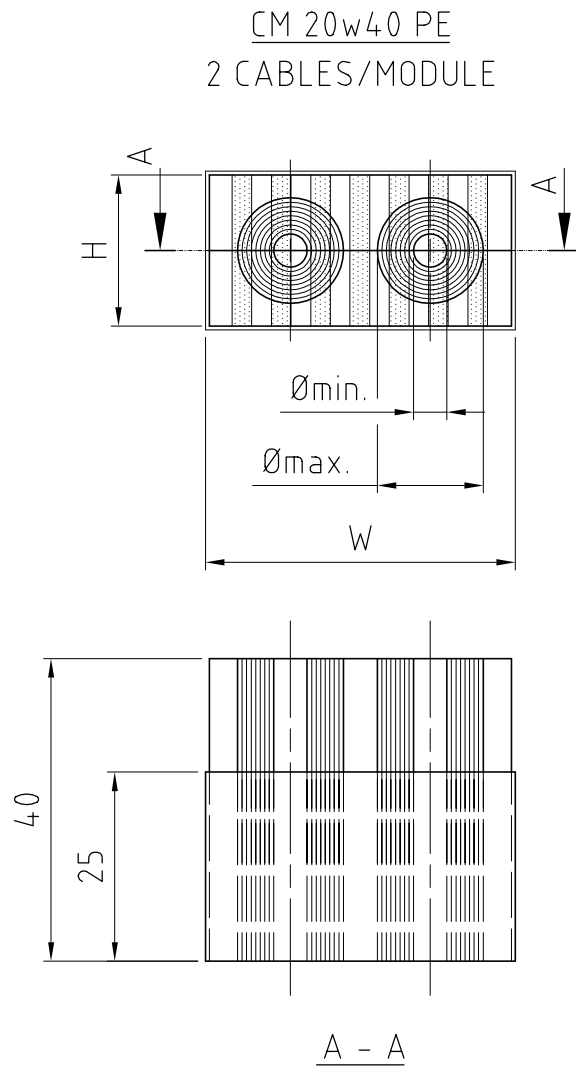
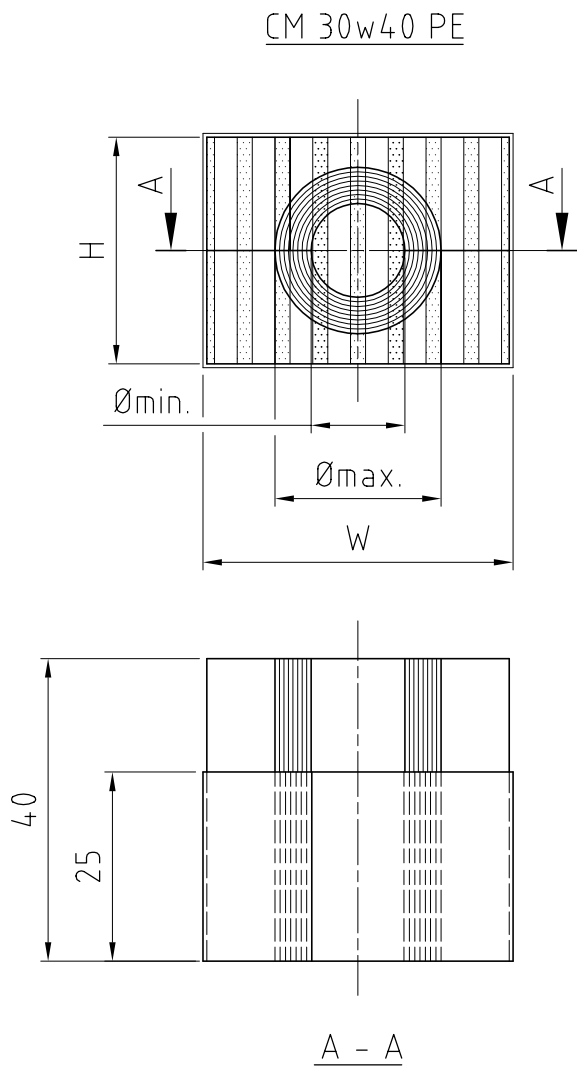
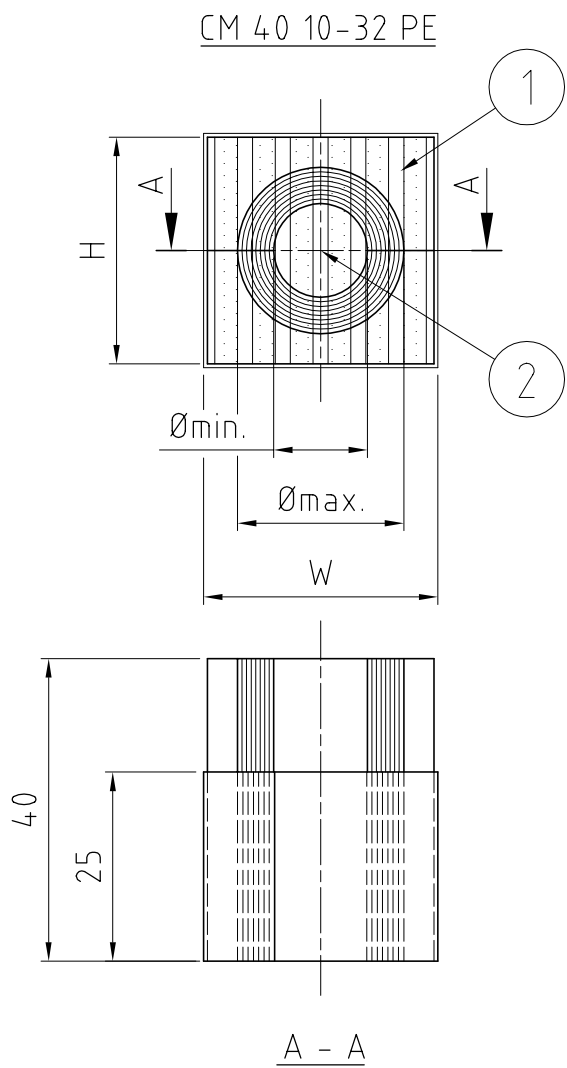


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ©ROXTEC INTERNATIONAL AB

TYPE	W (MM)	H (MM)	Ømin. (MM)	Ømax. (MM)
CM PE 15	15	15	3	11
CM PE 15w40	15	40	3.5	10.5
CM PE 20	20	20	4	14.5
CM PE 20w40	20	40	3.5	16.5
CM PE 30	30	30	10	25
CM PE 30w40	40	30	10	25
CM PE 40	40	40	21.5	34.5
CM PE 40 10-32	40	40	9.5	32.5



B	TABLE UPDATED	2007-04-26	C SVENSSON
Rev	Type of revision	Date	Sign

2	-	CORE	ROXYLON	-
1	-	RUBBER	ROXYLON	-
Item	Qty	Designation	Specification	NetWeight
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012		Designed by J HELLKVIST Checked by R PETERSSON Approved by R PETERSSON	Date 2003-12-17 Format A3 Scale 1:1	General tolerance DIN ISO 2768-1/2-M/K DIN ISO 13920-BF Welded details EN ISO 5817-B EN ISO 10042-B General surface roughness, Ra 12,5
CM PE MODULES EMC ASSEMBLY				Projection method
Drawing number S1005747				Rev B