
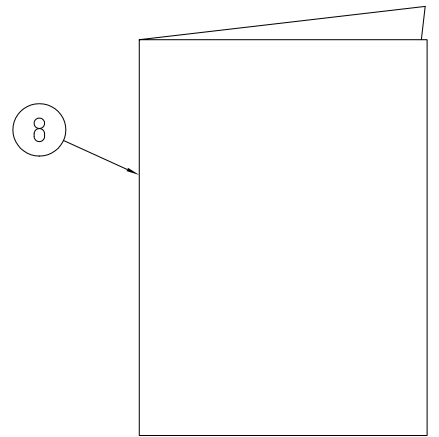
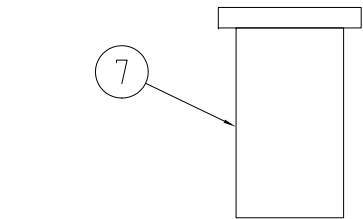
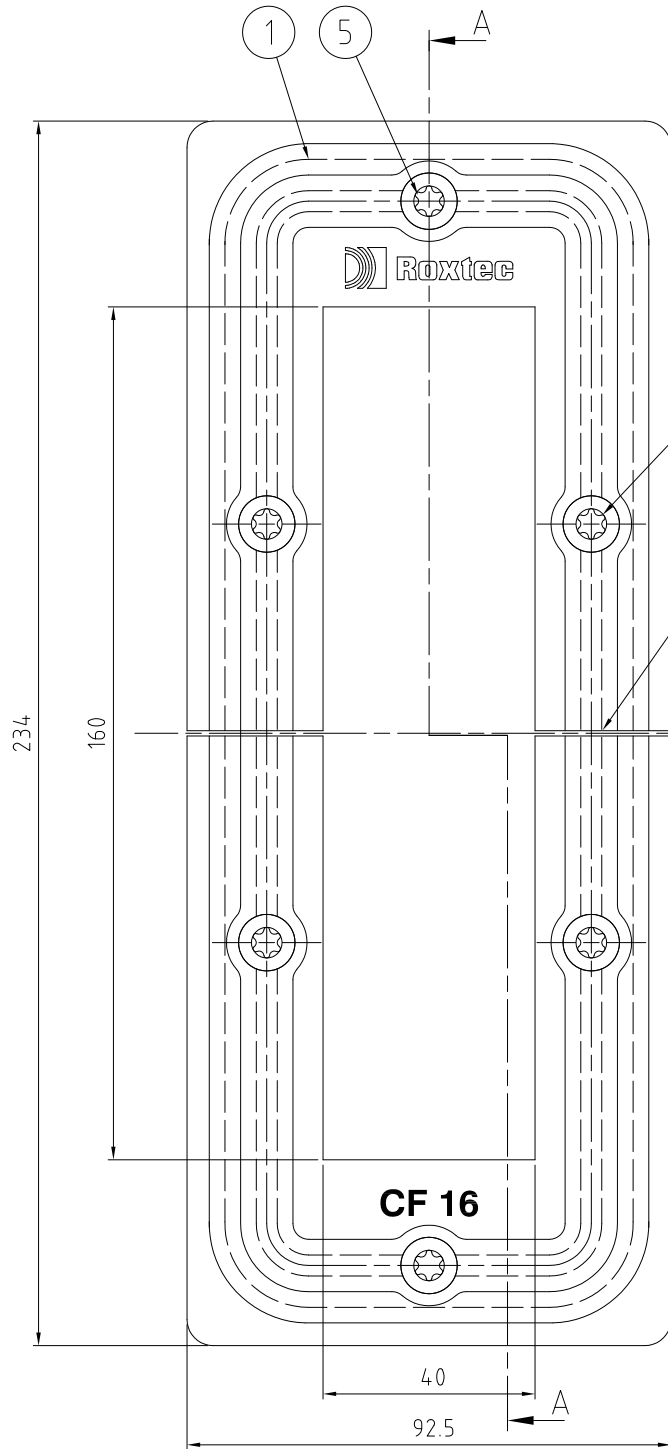
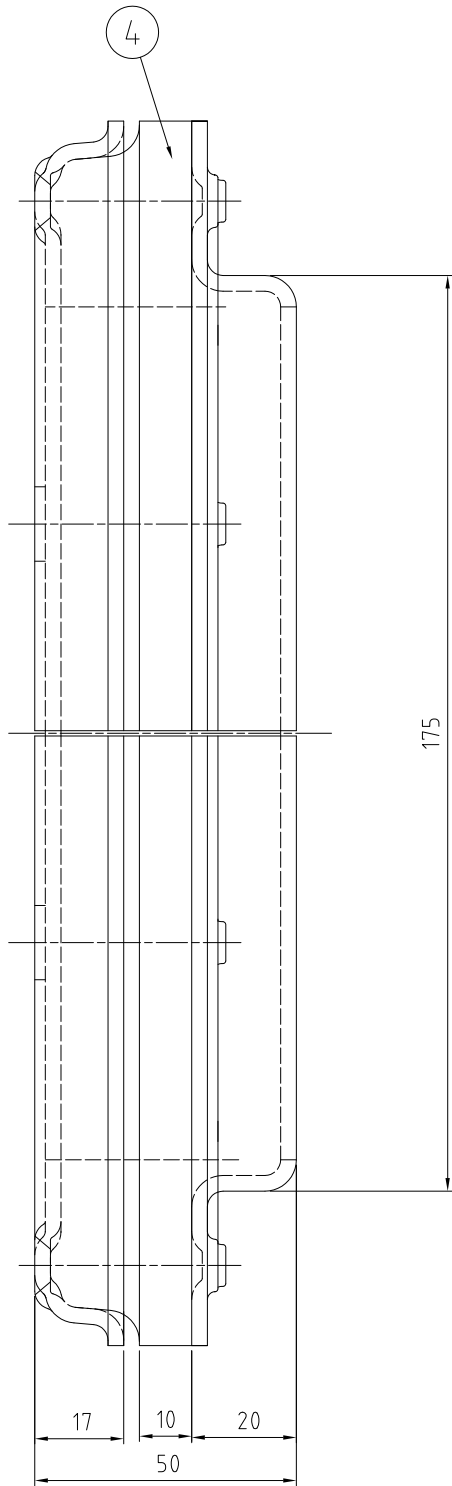
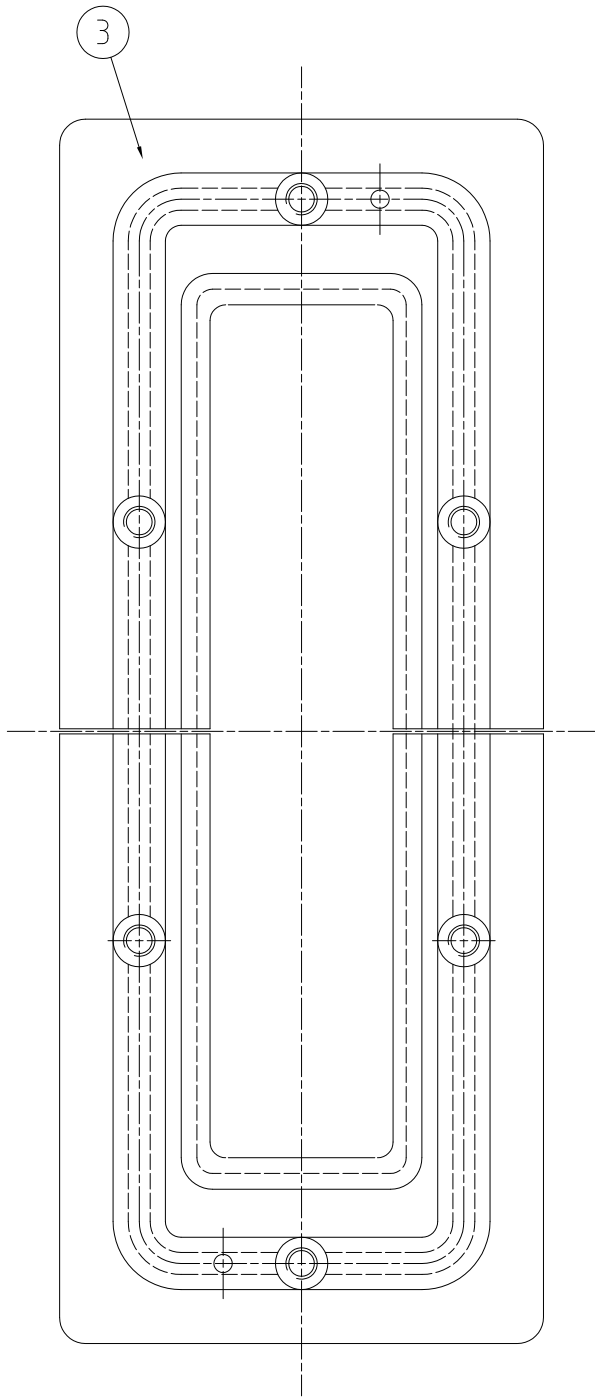


格克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄露。

All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

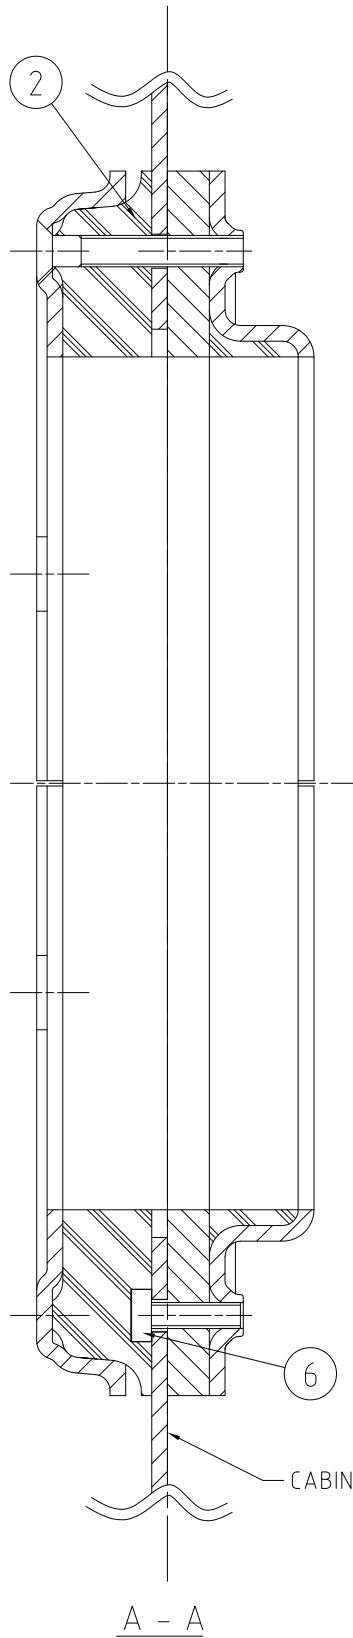

MATERIAL AND SURFACE TREATMENT
MILD STEEL / POWDER COATED RAL 7035
STAINLESS STEEL

8	1	INSTALLATION INSTRUCTION		-
7	1	LUBRICANT	10 ml	-
6	2	SCREW	MRX-Z M5x20 4,8 A4	-
5	6	SCREW	MKFT 8.8 TX M6x45, A4	-
4	1	EMC PLATE	ALUMINUM	-
3	1	BACK PIECE EMC	GALVANIZED MILD STEEL	-
2	1	COMPRESSION RUBBER EMC	NITRIL	-
1	1	TOP PIECE	MATERIAL OPTIONS IN TABLE	-
Item	Qty	Designation	Specification	NetWeight
General tolerance ISO 2768-1/2-M/K	Welded details EN ISO 5817-B	General surface roughness, Ra 12,5	Designed by se-joahel	Created Date 2003-12-17
EN ISO 1926-BF	EN ISO 10042-B	EN ISO 10042-B	Approved by se-jenboh	Approved Date 2014-03-19
		Title CF 16 EMC OPEN ASSEMBLY		Format A2
		Restricted due to Information Drawing		Scale 1:1
		Drawing number S1005742		Projection method First Angle
				Rev B

B	ITEMS 7 & 8 ADDED	2014-02-20	se-emikul
Rev	Type of revision	Date	Sign